LI48800T043TC3098

4.3 inch, 480*800 pixels resolution, RGB interface, IPS-TFT-LCD

DWIN Technical Document

Disclaimer：The product design is subject to alternation and improvement without prior notice.

Table of Contents

1 General Feature 3
2 Mechanical Drawing 4
3 Input/Output Terminals 5
4 Electrical Characteristics 6
5 Timing Characteristics 7
6 Optical Characteristics 11
7 Environmental Reliability Test 14
8 Packing Capacity & Dimension 15
9 Appearance Inspection 16
10 Precautions for Use of LCD Modules 19
11 LCD Introduction 20

DWIN Technologies Technical Document

1 General Feature

Feature		Description	Unit
Display Spec.	Size	4.3	inch
	Resolution	480(H)*800(V)	pixels
	Pixel Configuration	RGB Vertical Stripe	-
	Pixel Pitch	0.117(H)*0.117(V)	mm
	Viewing Direction	ALL	-
Mechanical Characteristics	Outside Dimension	67.1(W)*105.4(H)*3.0(D)	mm
	Active Area	56.16(W)*93.60(H)	mm
	Luminance	300	cd/m²
	LED Numbers	10 LEDS	-
	Pin Order	From left to right 40PIN_0.5mm	-
	Weight	-	g
Electrical Characteristics	Interface	RGB_24bit	-
	Color Depth	16.7M	colors
	Driver Condition	3.0(Type)	V
	Driver IC	ST7701S	-
Temperature Range	Operating Temp.	-20~70	℃
	Storage Temp.	-30~80	℃

Note: Requirements on Environmental Protection: RoHS.
You can use dynamic screen saver wallpapers to avoid afterimages caused by fixed paper display for a long time.

DWIN Technologies Technical Document

2 Mechanical Drawing

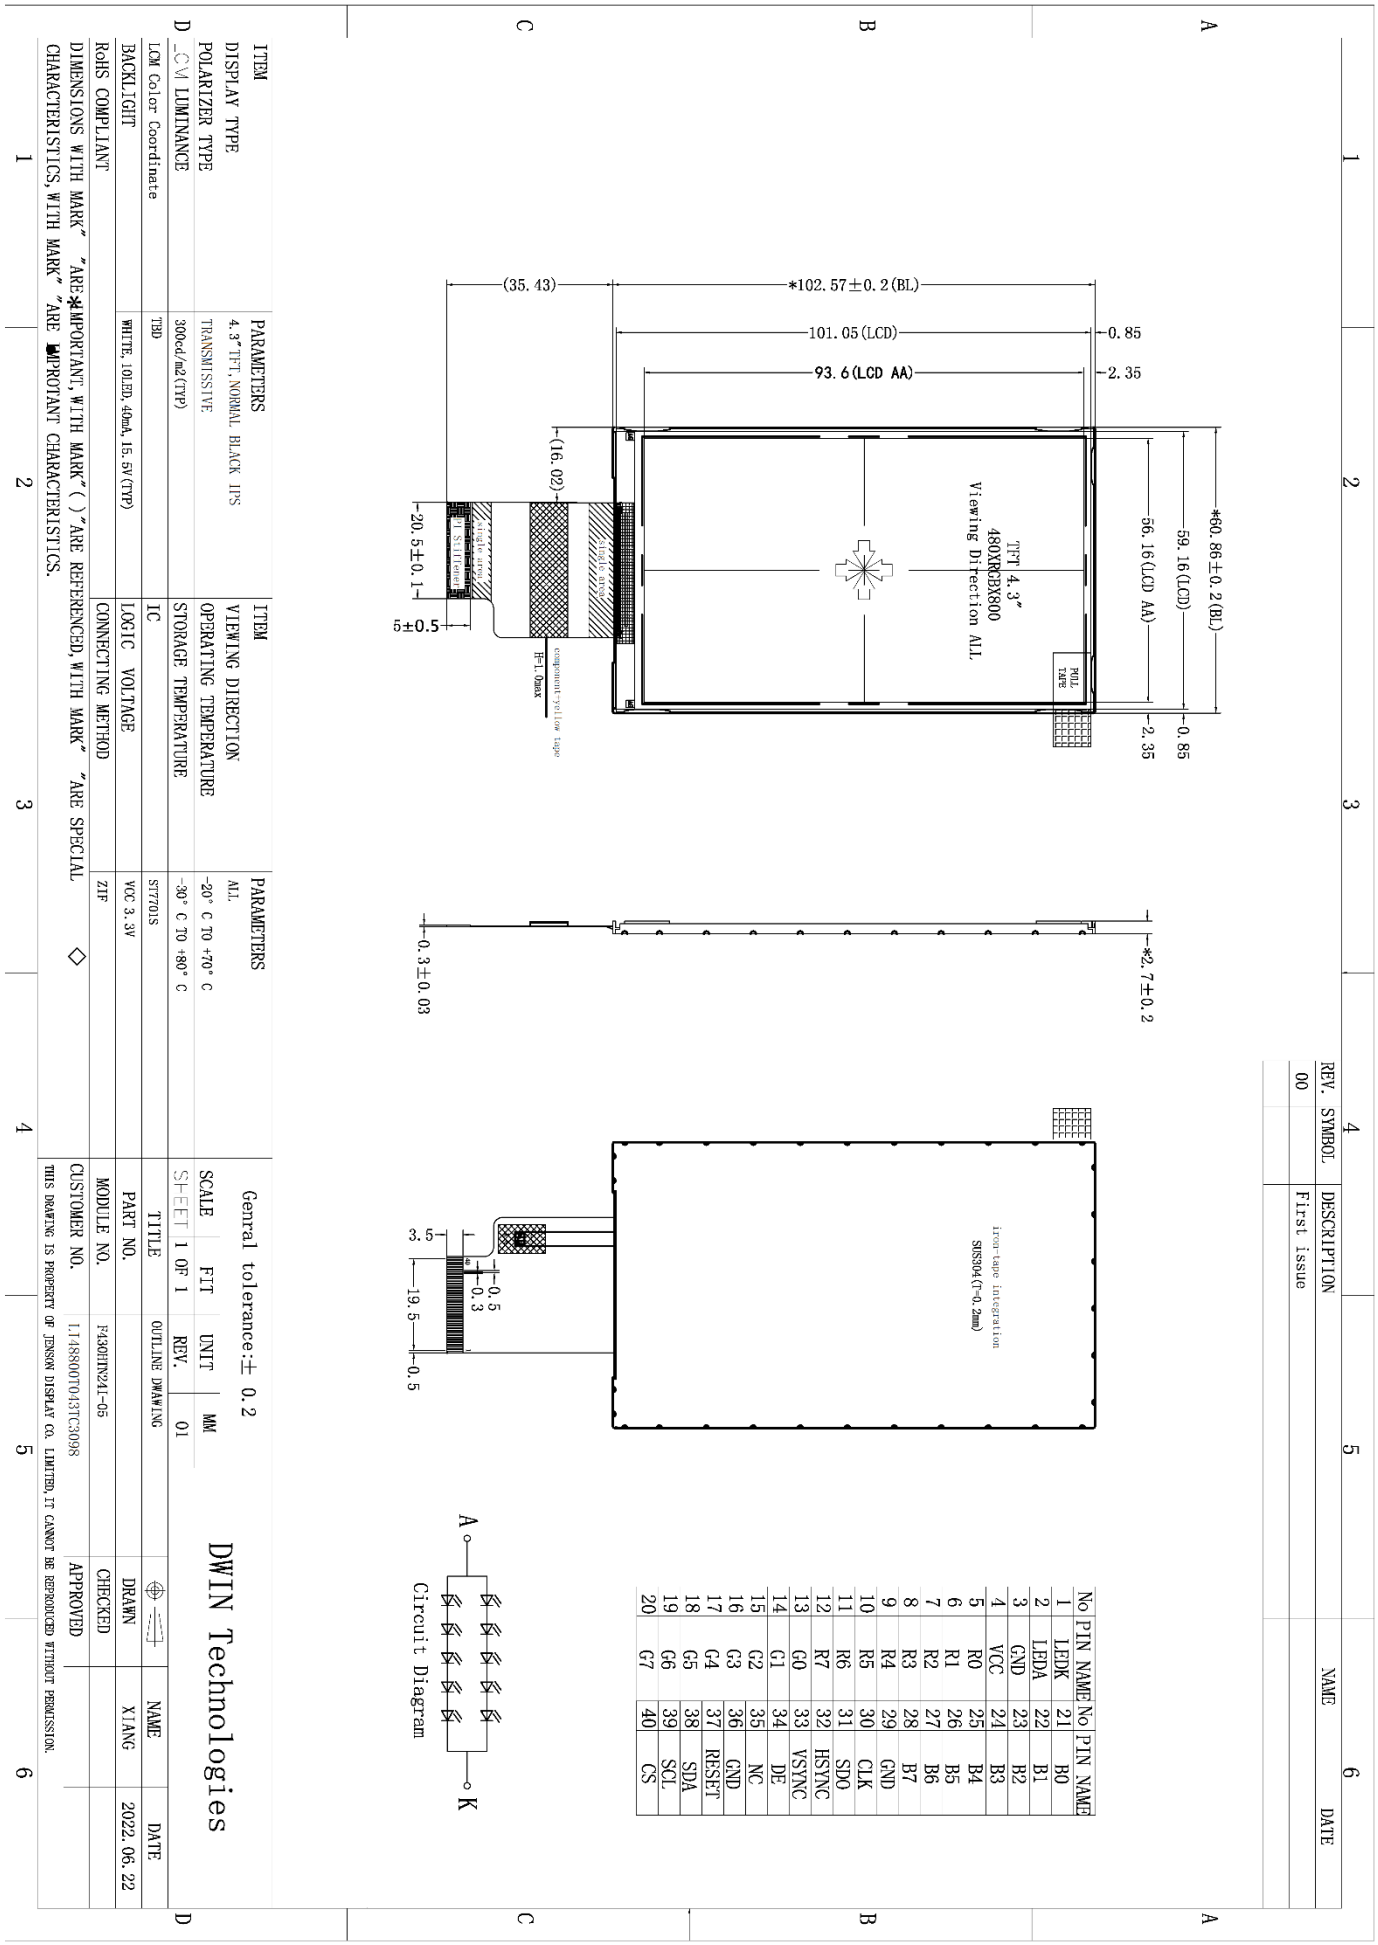

No	PIN NAME	No	PIN NAME
1	LEDK	21	B0
2	LEDA	22	B1
3	GND	23	B2
4	VCC	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	CLK
11	R6	31	SDO
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	DE
15	G2	35	NC
16	G3	36	GND
17	G4	37	RESET
18	G5	38	SDA
19	G6	39	SCL
20	G7	40	CS

ITEM	PARAMETERS	ITEM	PARAMETERS
DISPLAY TYPE	4.3"TFT,NORMAL BLACK IPS	VIEWING DIRECTION	ALL
POLARIZER TYPE	TRANSMISSIVE	OPERATING TEMPERATURE	-20° C TO +70° C
LCM LUMINANCE	300cd/m2(TYP)	STORAGE TEMPERATURE	-30° C TO +80° C
LCM Color Coordinate	TBD	IC	ST7701S
BACKLIGHT	WHITE, 10LED, 40mA, 15.5V(TYP)	LOGIC VOLTAGE	VCC 3.3V
RoHS COMPLIANT		CONNECTING METHOD	ZIF

DIMENSIONS WITH MARK" "ARE※IMPORTANT,WITH MARK"( )"ARE REFERENCED,WITH MARK" "ARE SPECIAL ◇
CHARACTERISTICS,WITH MARK" "ARE ■IMPROTANT CHARACTERISTICS.

3 Input/Output Terminals

Pin NO.	Symbol	Function	Remark
1	LEDK	Back light cathode	
2	LEDA	Back light anode	
3	GND	Ground	
4	VCC	Power supply	
5-12	R0-R7	Data bus	
13-20	G0-G7	Data bus	
21-28	B0-B7	Data bus	
29	GND	Ground	
30	CLK	Clock signal	
31	SDO	Serial data output pin.	
32	HSYNC	Line synchronizing signal	
33	VSYNC	Frame synchronizing signal	
34	DE	Data ENABLE signal	
35	NC	Not connect	
36	GND	Ground	
37	RESET	Reset Signal pin	
38	SDA	Serial data input/output bidirectional pin for SPI interface	
39	SCL	Serial clock input for SPI interface	
40	CS	A Chip Select signal	

DWIN Technologies Technical Document

4 Electrical Characteristics

4.1 Driving TFT LCD Panel

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Analog Voltage	VCI	2.8	3.0	3.3	V	
Input Logic High Voltage	VIH	0.7VCI	-	VCI	V	
Input Logic Low Voltage	VIL	GND	-	0.3VCI	V	
Output Logic High Voltage	VOH	0.8VCI	-	VCI	V	
Output Logic Low Voltage	VOL	GND	-	0.2VCI	V	

4.2 LED Backlight Specification

Item	Symbol	Min.	Typ.	Max.	Unit	Remark
Forward Voltage	V_F	14.6	15	16	V	
Forward Current	I_F	-	40	-	mA	
Luminance	Lv	-	300	-	cd/m^2	
Power Consumption	P_{LED}	-	600	-	mW	
Uniformity(with L/G)	Avg	75	80	-	%	
LED Life Time	Hr	-	30000	-	Hour	

Note: 10 LEDs (5 LEDs Serial, 2 Ways Parallel)

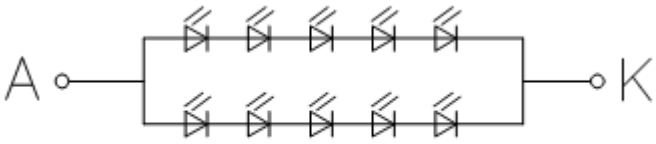

Circuit Diagram

DWIN Technologies Technical Document

5 Timing Characteristics

5.1 SPI Serial Data Transfer Interface Characteristics

5.1.1 Write cycle sequence

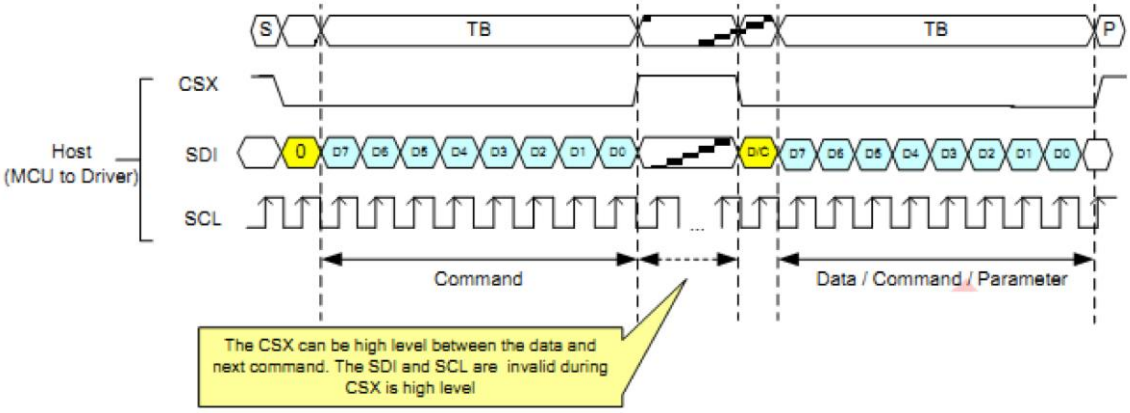

5.1.2 Read cycle sequence

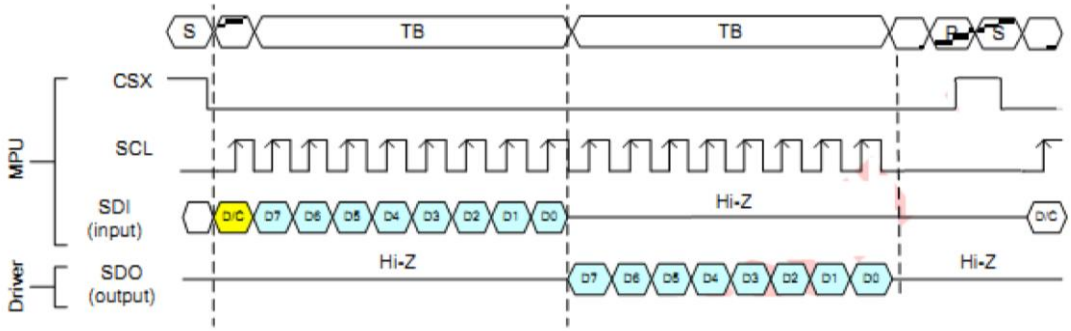

DWIN Technologies

5.2 RGB Interface Characteristics

Parameter	Symbols	Condition	Min.	Typ.	Max.	Units
Frame Rate	FR		54		66	fps
Horizontal Low Pulse width	HLW		2		50	DOTCLK
Horizontal Back Porch	HBP		4		200	DOTCLK
Horizontal Address	HACT			480		DOTCLK
Horizontal Front Porch	HFP		2		250	DOTCLK
Vertical Low Pulse width	VLW		1		50	Line
Vertical Back Porch	VBP		2		200	Line
Vertical Address	VACT				864	Line
Vertical Front Porch	VFP		2		250	Line
Data Clock	DCLK		16.6		35.7	MHz

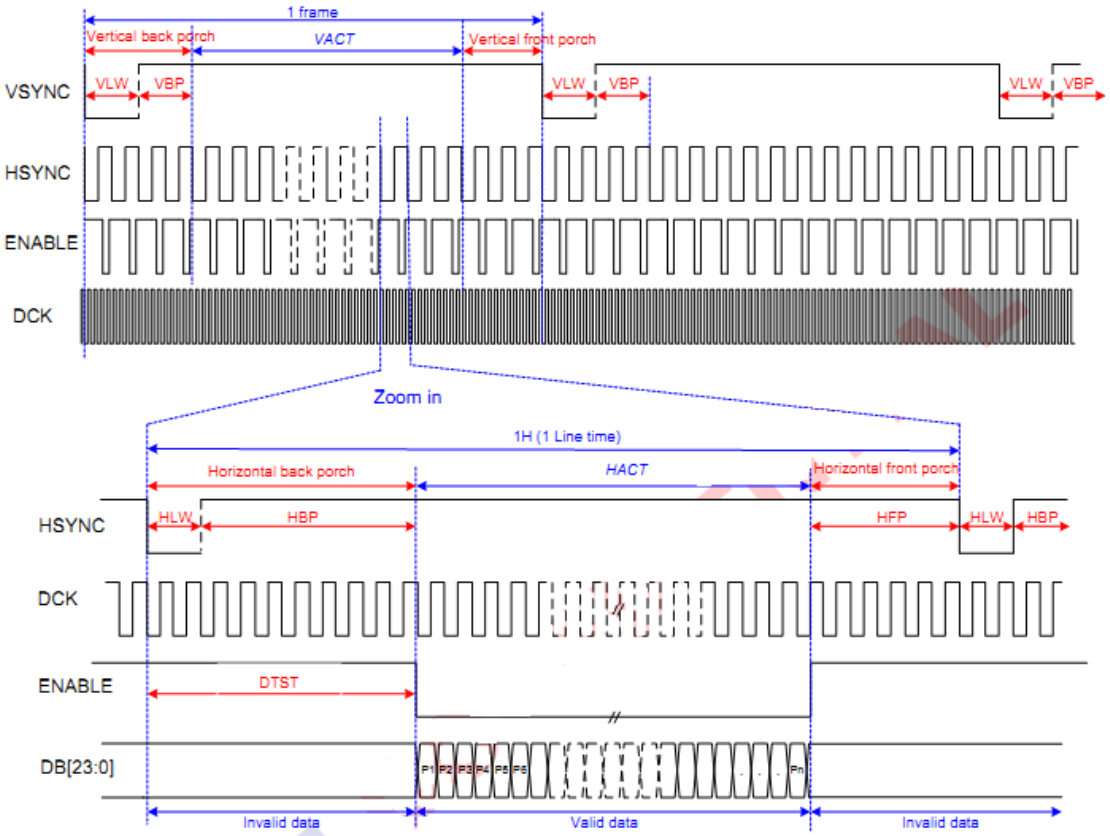

5.3 Reset Timing

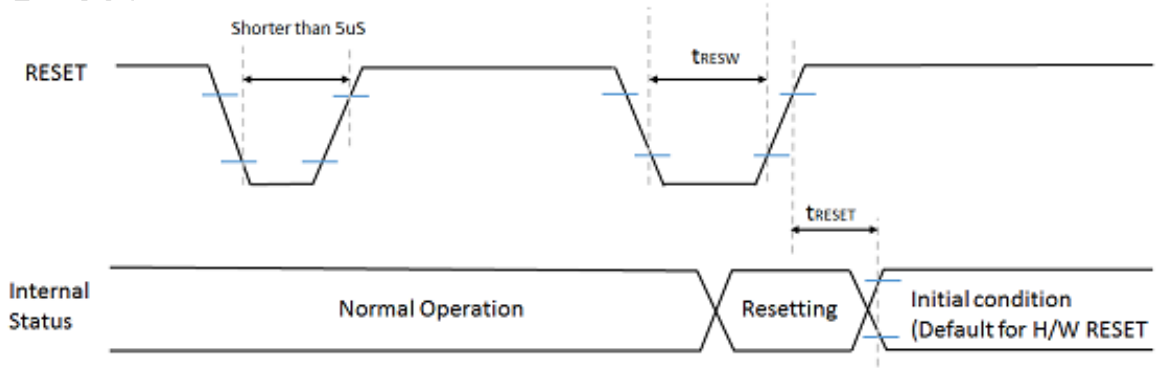

Signal	Symbol	Parameter	Description	Specification			Unit
				MIN	TYP	MAX	
RESET	tRESW	Reset "L" pulse width		10			μS
	tRESET	Reset complete time	When reset applied during Sleep in mode			5	mS
			When reset applied during Sleep Out mode			120	mS

5.4 Power Sequence

5.4.1 Power on Sequence

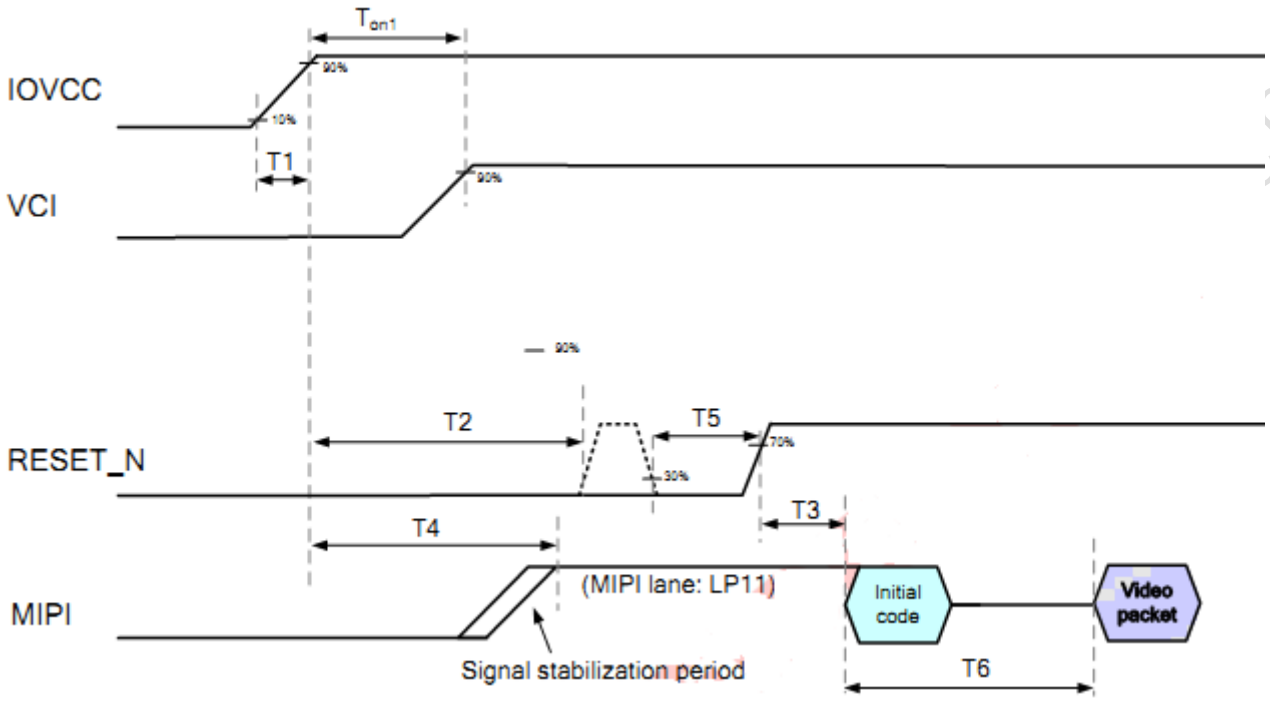

Symbol	Value			Unit	Remark
	Min.	Typ.	Max.		
Ton1	0			mS	
Ton2	0			mS	
Ton3	0			mS	
Ton4	0			mS	
T2		No limit		uS	
T3	0			mS	
T4	10			mS	
T5	20			mS	
T6	0		T4	mS	
T7	10			uS	
T8	120			mS	

5.4.2 Power off Sequence

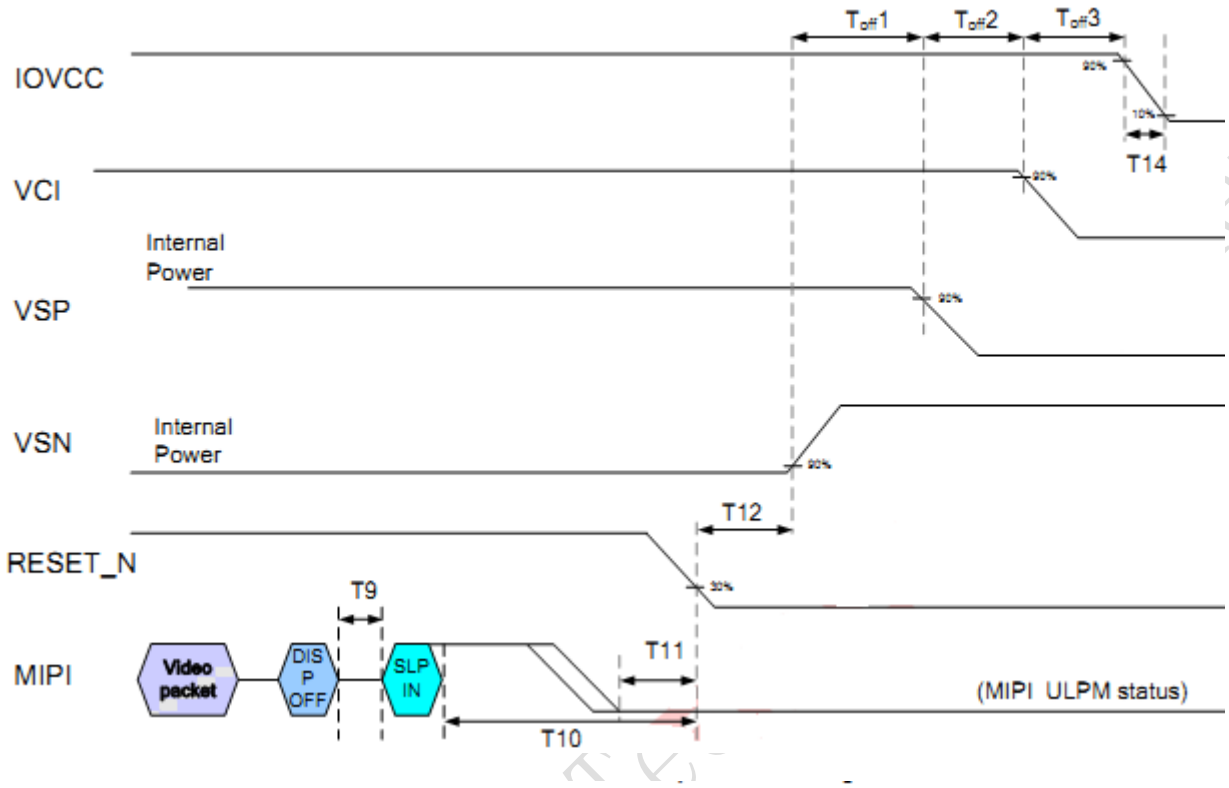

Symbol	Description	Value			Unit	Remark
		Min.	Typ.	Max.		
Toff1	VSN off to VSP off delay	>0			us	
Toff2	VSP off to VCI off delay	>0			us	
Toff3	VCI off to IOVCC off delay	>0			us	
Toff4	VSP off to IOVCC off delay	>0			us	
T9	Display-off command received to Sleep-in command delay	>0			us	
T10	Sleep-in command received to valid to RESET_N low	100			ms	
T11	MIPI ultra low power mode to valid to RESET_N low	0			us	
T12	RESET_N low to VSN off delay	0			us	
T13	RESET_N low to VCI off delay	0			us	
T14	IOVCC power falling time			2	ms	

6 Optical Characteristics

Item	Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing Angle	Top	CR≧10	70	80	-	Deg.	Note 2
	Bottom		70	80	-		
	Left		70	80	-		
	Right		70	80	-		
Contrast Ratio	CR	θ=0°	800	1000	-		
Response Time	T_r+T_f	θ=0°	-	25	35	ms	Note 4
Color Gamut	NTSC	θ=0°	65	70	-	%	
Color Chromaticity (CIE1931)	Wx	θ=0°	0.271	0.286	0.301		Note 5
	Wy		0.302	0.317	0.3332		
	Rx		0.636	0.651	0.666		
	Ry		0.296	0.311	0.326		
	Gx		0.241	0.256	0.271		
	Gy		0.573	0.588	0.603		
	Bx		0.123	0.138	0.153		
	By		0.083	0.098	0.113		

Test conditions:
IF= 40 mA, and the ambient temperature is 25℃.

DWIN Technologies Technical Document

Note 1: Definition of optical measurement system.

The optical characteristics should be measured in dark room. After 5 minutes operation, the optical properties are measured at the center point of LCD.

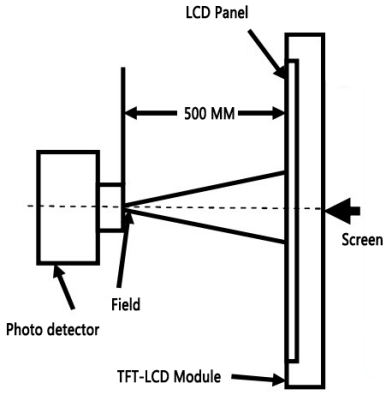

Note 2: Definition of viewing angle range and measurement system.

The viewing angle is measured at the center point of the LCD by BM-7A.

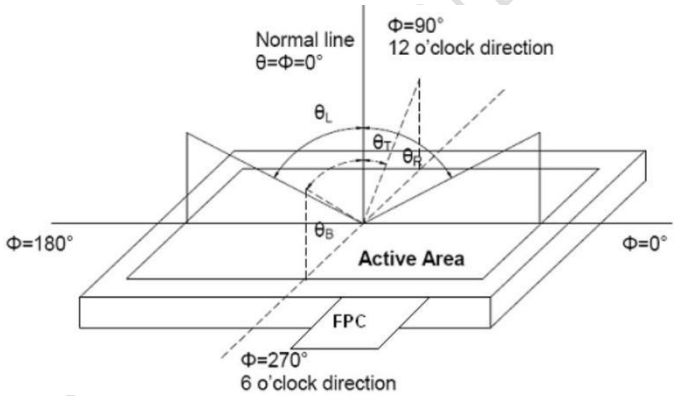

Note 3: Color temperature.

When the radiation of the light source is exactly the same in the visible region and the absolute blackbody, the temperature of the blackbody is called the color temperature of the light source. Color temperature is an index to measure the degree of light source color (cold color, warm color). Warm color < 3300K, intermediate color 3300 ~ 5000K, cold color > 5000K.

DWIN Technical Ducument

Note 4: Definition of response time.

The response time is defined as the LCD optical switching time interval between “White” state and “Black” state. Time ON (TON) is the time between photo detector output intensity changed from 90% to 10%. And time off (TOFF) is the time between photo detector output intensity changed from 10% to 90%.

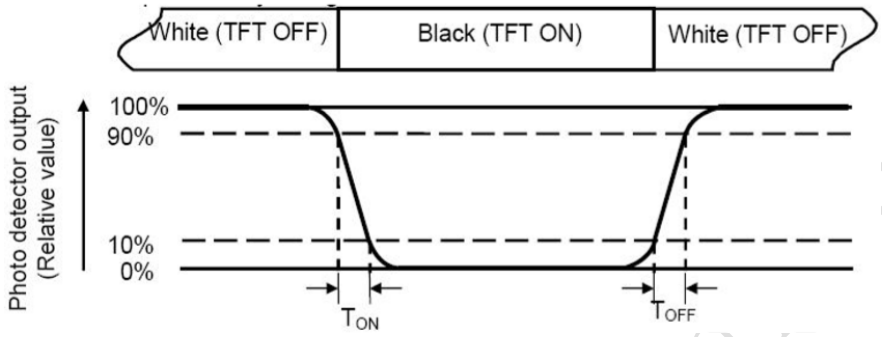

Note 5: Definition of color chromaticity (CIE1931).

Color coordinates measured at center point of LCD.

Note 6: Definition of luminance.

Measure the luminance of white state at center point.

DWIN Technologies Technical Document

7 Environmental Reliability Test

NO	Test Item	Condition	Remarks
1	High Temperature Operation	Ta=+70℃, 36hours	IEC60068-2-1:2007 GB2423.2-2008
2	Low Temperature Operation	Ta=-20℃, 36hours	IEC60068-2-1:2007 GB2423.1-2008
3	High Temperature Storage	Ta=+80℃, 36hours	IEC60068-2-1:2007 GB2423.2-2008
4	Low Temperature Storage	Ta=-30℃, 36hours	IEC60068-2-1:2007 GB2423.1-2008
5	Storage at High Temperature and Humidity	Ta=+45℃, 85% RH,48hours	IEC60068-2-78 :2001 GB/T2423.3-2006
6	Thermal Shock (non-operation)	-20℃ /30min←→+70℃/30min, Change time:5min,10cycles	Start with cold temperature, End with high temperature, IEC60068-2-14:1984, GB 2423.22-2002

DWIN Technologies Technical Department

8 Packing Capacity & Dimension

Dimension			
Dimension(mm)	67.1(W)*105.4(H)*3.0(D)		
Net Weight	-		
Packing Capacity			
Size	**LCD Size and Resolution**	**Layer**	**Quantity(Pcs)**
220mm(L)x160mm(W)x47mm(H)	4.3 inch 480*800	1	1
600mm(L)x450mm(W)x300mm(H)	4.3 inch 480*800	2	240

Packing instruction：
The LCD is placed in the grid, covered with a PE static bag and compactly assembled, the upper and the lower layers of the grid are protected by buffer spaces.

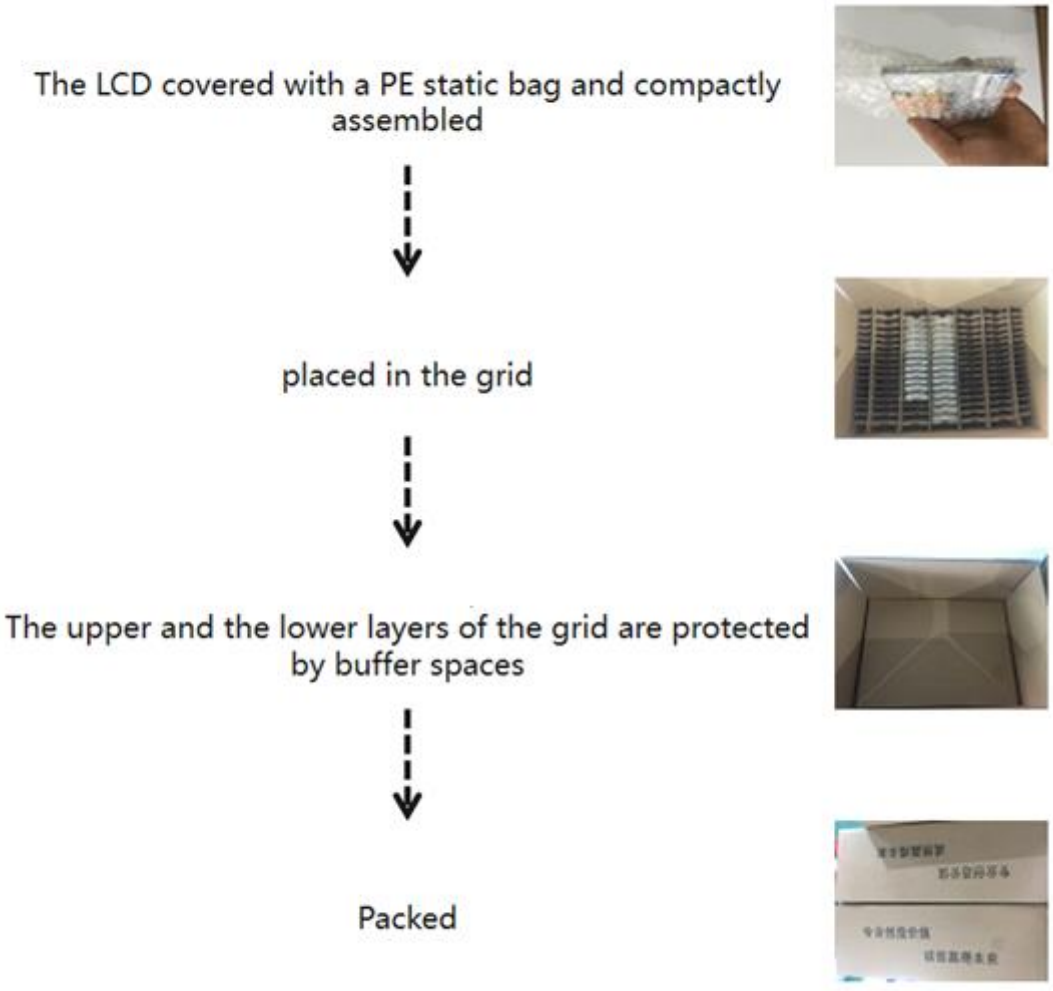

9 Appearance Inspection

9.1 General rules for inspection

9.1.1 Anti-static wearables (anti-static wristbands, gloves) must be worn during the inspection.

9.1.2 Do not use bare hands to touch the position of the device, golden fingers, and the surface of the screen to prevent the sweat from human hands from causing oxidation and affecting the appearance.

9.1.3 It is forbidden to stack products out of specification and handle them with care to avoid damage to components.

9.1.4 The repaired products need to be inspected to prevent rosin and tin slag from exceeding the specifications.

9.1.5 When technical documents and process documents have specific requirements for products, the technical documents and process documents shall be the main requirements.

9.2 Inspection conditions

9.2.1 The conditions of display function check

Angle: ±5°;

Inspection method: visual inspection. The inspection object is 30-40cm away from the light source, and the eye is 30-40cm away from the inspection object;

Illumination: 300-500Lux;

Inspection time: 5-10S.

9.2.2 Visual inspection conditions

Angle: ±45°;

Inspection method: visual inspection. The inspection object is 30-40cm away from the light source, and the eye is 30-40cm away from the inspection object;

Illumination: 800-1500Lux;

Inspection time: 5-10S.

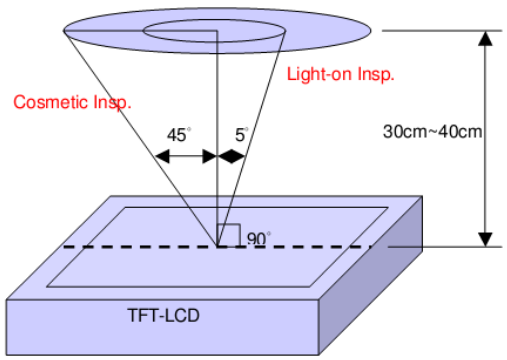

DWIN Technologies Technical Document

9.3 Inspection standards

Type	Test Items	Judgement Standard	Defect Category
Display state	Dead pixels	No dead pixels	
	mura	From different angles, the brightness is required to be uniform. Under the 64-level grayscale or pure black interface, there should be no uneven display brightness within the viewing angle range of 45° through 6% ND FILTER. Y series (TV film) LCD screen does not have specific requirements, and the picture inspection does not affect the display as qualified. 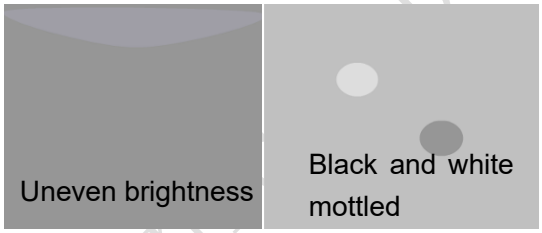 Uneven brightness Black and white mottled	Slight defect
	Light leakage	Under the 64-level grayscale or pure black interface, there should be no obvious light leakage within the viewing angle range of 45° by visual inspection or through 6% ND FILTER. Y series (TV LCD screen) series can be without obvious visual defects.	Slight defect
	Linear foreign bodies	1. W≤0.05, L≤2mm, negligible; 2. 0.05mm＜W≤0.1mm, L≤2mm, N≤3; 3. W＞0.1mm, L＞2mm, not allowed.	Slight defect
Screen surface	Within the effective area	Spotted: 1. D≤0.2mm and it is not a piece, it is not counted; 2. 0.2mm＜D≤0.5mm, N≤3; 3. D>0.5mm, L>0.5mm, W>0.5mm are not allowed; (The spotted foreign objects shall not exceed the point-line gauge D=0.5, and the black dot coverage shall be checked, and the spotted foreign objects shall be judged within the range of D=0.5)	Slight defect

DWIN Technologies Technical Document

	Foreign objects Scratch Air bubbles	Linear: 1. W≤0.05, L≤2mm, ignored; 2. 0.05＜W≤0.1mm, L≤2mm, N≤3; 3. W>0.1mm, L>2mm, not allowed.	
	Outside the effective area Foreign objects Scratches Air bubbles	。 Foreign objects are not checked, and bubbles are not allowed to D>1mm; Non-inductive scratches of no more than 0.1×8mm are allowed.	Slight defect
	Crack	Not allowed. 	Slight defect
	Notch	1. Does not affect the appearance from the front; 2. Does not affect the relevant alignment; 3. X≤1mm, Y≤1mm, N≤2. 	Slight defect
	Glass side Foreign objects Dirty	。 1. The foreign body on the side is not controlled; 2. The paint pen marks on the side are not controlled; 3. Side oily note printing is not allowed.	Slight defect
FPC	Cracks Goldfinger crease	Not allowed.	Heavy deficit
	Crease	Slight creases are not controlled; The crease is whitish and has lines, which is not allowed.	Heavy deficit
	Top wound, stab wound	No damage to the line, D≤0.2mm; Damage to the line is not allowed.	Heavy deficit
	Scratch	Slight scratches on the surface are not controlled; Damage to the line is not allowed.	Heavy deficit
	Goldfinger scratch	W≤0.05mm, no control; W＞0.05mm, not allowed; Test probe tip marks are not controlled.	Heavy deficit
	Component	Under-soldering, over-soldering and false soldering are not allowed.	Heavy deficit

DWIN Technologies Technical Document

10 Precautions for Use of LCD Modules

10.1 Handling Precautions

10.1.1 The display panel is made of glass. Do not subject it to a mechanical shock by dropping it from a high place, etc.

10.1.2 If the display panel is damaged and the liquid crystal substance inside it leaks out, be sure not to get any in your mouth, if the substance comes into contact with your skin or clothes, promptly wash it off using soap and water.

10.1.3 Do not apply excessive force to the display surface or the adjoining areas since this may cause the color tone to vary.

10.1.4 The polarizer covering the display surface of the LCD module is soft and easily scratched. Handle this polarizer carefully.

10.1.5 If the display surface is contaminated, breathe on the surface and gently wipe it with a soft dry cloth. If still not completely clear, Can only use LCD dedicated cleaner, the following organic solvent can not be used:

- Isopropyl alcohol
- Ethyl alcohol
- Ketone
- Aromatic solvents

10.1.6 Do not attempt to disassemble the LCD Module.

10.1.7 If the logic circuit power is off, do not apply the input signals.

10.1.8 To prevent destruction of the elements by static electricity, be careful to maintain an

10.1.9 optimum work environment.

10.1.9.1 Be sure to ground the body when handling the LCD Modules.

10.1.9.2 Tools required for assembly, such as soldering irons, must be properly ground.

10.1.9.3 To reduce the amount of static electricity generated, do not conduct assembly and other work under dry conditions.

10.1.9.4 The LCD Module is coated with a film to protect the display surface. Be care when peeling off this protective film since static electricity may be generated.

10.2 Storage precautions

10.2.1 When storing the LCD modules, avoid exposure to direct sunlight or to the light of fluorescent lamps.

10.2.2 The LCD modules should be stored under the storage temperature range. If the LCD modules will be stored for a long time, the recommend condition is:
Temperature: 0℃ ~ 40℃ Relatively humidity: ≤80%.

10.2.3 The LCD modules should be stored in the room without acid, alkali and harmful gas.

10.3 Transportation Precautions

10.3.1 The LCD modules should be no falling and violent shocking during transportation, and also should avoid excessive press, water, damp and sunshine.

DWIN Technologies Technical Document

11 LCD Introduction

11.1 Process capacity

DWIN adopts original class A glass and the entire production is in the park from cleaning, cutting, bonding, and laminating of large glass to backlight assembly, quality inspection, and aging. There are 12,000 square meters of clean workshop, with a monthly production capacity of about 2.5 million pieces. Each piece of LCD produced in the factory is for 30 days of aging.

11.2 ODM service

Based on LCD products of 1.5~21.5 inches, DWIN provides the following customization services.

1、LCD HDMI interface customization.

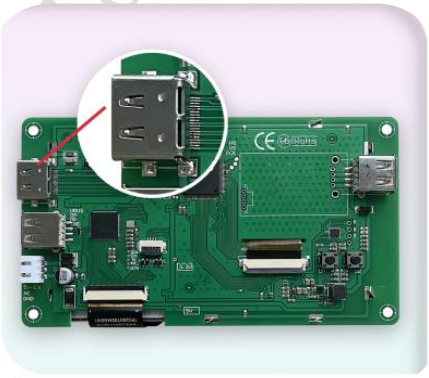

HDMI interface

DWIN Technologies Technical Document

2、Special screen customization such as high brightness, ultra-wide temperature and strong electromagnetic protection.

High luminance
(up to 1200nit)

Ultra-wide temperature
(-40~85℃)

Strong electromagnetic protection

3、Lamination customization service of LCD + TP.

LCM+RTP

LCM+CTP

4、Customization service of DWIN self-developed T5L ASIC+ LCD + TP.

5、Smart screen finished product customization.

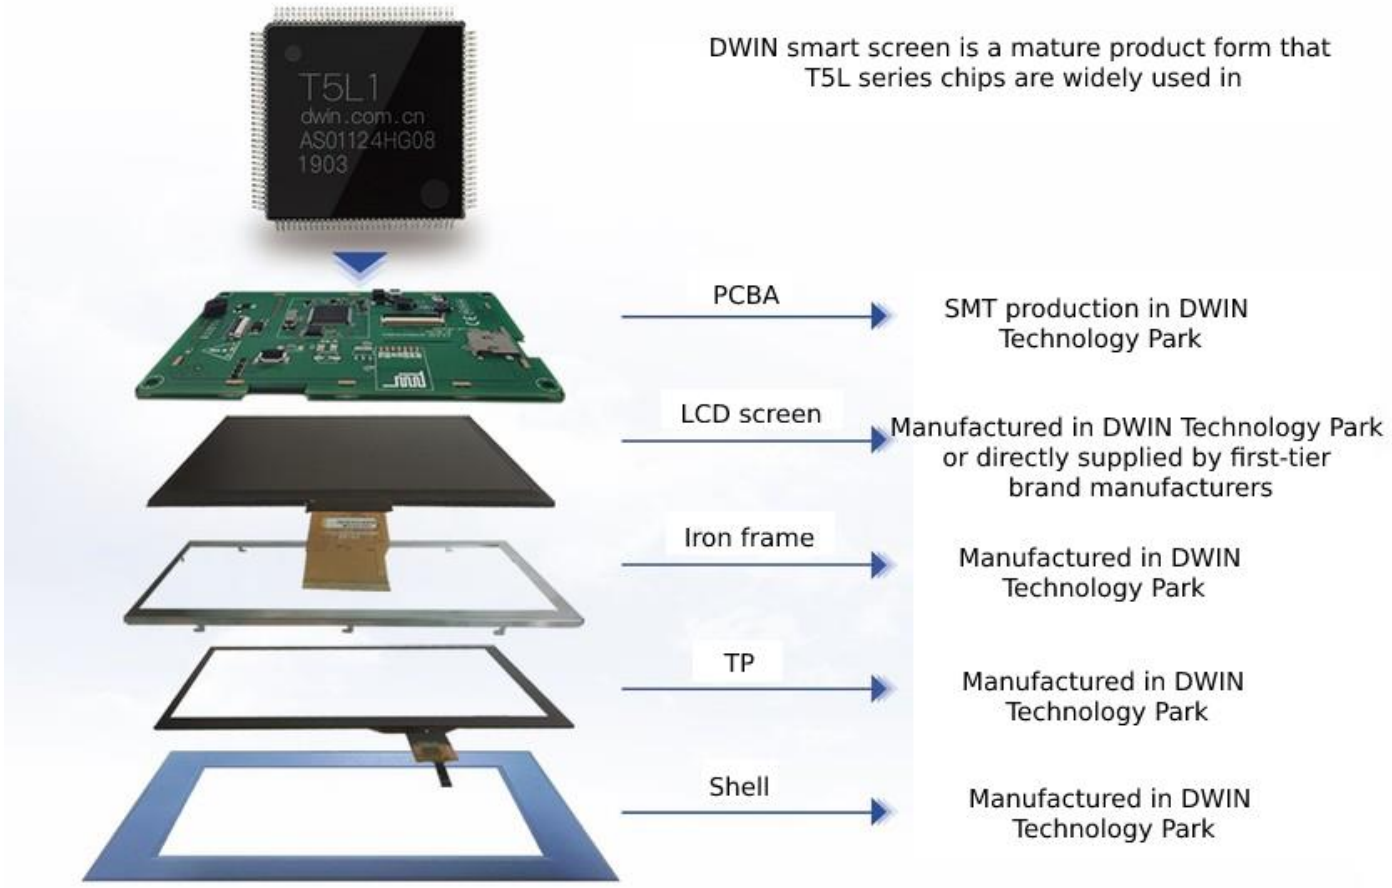

Please contact our sales staff for other customization needs.

DWIN Technologies

Record of Revision

Rev	Date	Description	Editor
00	2022-08-23	First Release	Zheng Yunjia
01	2022-11-17	Modify Temperature Range	Zheng Yunjia
02	2022-12-06	Update CAD	Zheng Yunjia
03	2023-02-24	Add Product Picture	Chen Xian

Please contact us if you have any questions about the use of this document or our products, or if you would like to know the latest information about our products:

Customer service tel: +86 400 018 9008

Customer service email: dwinhmi@dwin.com.cn

DWIN developer forum: https://forums.dwin-global.com/index.php/forums/

Thank you all for continuous support of DWIN, and your approval is the driving force of our progress!

DWIN Technologies Technical Document