



# T5L\_DGUSII Application Development Guide

Version 2.8



## Contents

<b>Chapter 1 Quick Start</b>	3
1.1 Naming Rule	3
1.2 Interface Definition and Wiring	4
1.3 Power Supply	6
1.4 Driver Installation	6
1.5 Software Installation	8
<b>Chapter 2 Development System</b>	9
2.1 T5L ASIC	9
2.2 T5L_DGUS II Development System	11
2.3 Features	13
2.4 Software Process	14
2.5 FLASH Memory Allocation	15
2.6 RAM Memory Variable Address Space	16
2.7 RAM Description Pointer Space	17
<b>Chapter 3 SD Card Interface</b>	20
3.1 MicroSD(TF) Card Format	20
3.2 SD Card Interface Download Method	21
3.3 Download File	22
<b>Chapter 4 Communication Protocol</b>	44
4.1 UART(UART2)	44
4.2 UART2 Debug Interface Instructions	44
<b>Chapter 5 System Variable Interface</b>	48
5.1 System Variable Interface	48
5.2 FSK bus interface	77
5.3 Network Interface	79
<b>Chapter 6 Touch Variable Configuration (13.BIN)</b>	85
6.1 List of Touch Variables	86
6.2 Variable Data Input	87
6.3 Popup Menu	90
6.4 Incremental Adjustment	93
6.5 Drag Adjustment	95
6.6 Return Key Code	97
6.7 Text Input	99
6.8 Synchrodata Return	107
6.9 Rotation Adjustment	110
6.11 Page Sliding	113
6.12 Slide Icon Selection	115
6.13 Bit Button	117
<b>Chapter 7 Display Variable Configuration</b>	120
7.1 List of Display Variables	121
7.2 Variables Icon	124
7.3 Animation Icon	127
7.4 Slider Display	131
7.5 Artistic Variables	133
7.6 Image Animation	135
7.7 Icon Rotation	137
7.8 Bit Icon	140
7.9 Icon Page Tran	143
7.10 Icon Overlay	146
7.11 Batch Variable Icon	150
7.12 Data Variables	152
7.13 Text Display	157
7.14 RTC Display	162
7.15 HEX Data	166
7.16 Text Scroll	168
7.17 Data Window	171
7.19 Roll Character	179
7.20 GTF Icon Font	183
7.21 Real-Time Curves	188



7.22 Basic Graphics .....	197
7.23 Process Bar .....	219
7.24 Zone Scrolling .....	221
7.25 QR Code .....	222
7.26 Brightness .....	225
7.27 Data Transmit .....	226
7.28 Video .....	227
<b>Chapter 8 DGUS Basic Functions</b> .....	<b>234</b>
8.1 Import .....	234
8.2 Edit tool .....	234
8.3 Front and Back .....	234
8.4 Viewing the Usage of VP .....	234
8.5 Preview .....	234
8.6 New Resolution .....	234
8.7 Converting Resolution .....	235
8.8 Replace T5 project with T5L project .....	235



## Chapter 1 Quick Start

### 1.1 Naming Rule

Product Line Code	DM	DWIN Smart LCM Product Line				
Color Code	1 Character	T=65K color(16-bit) G=16.7M/262K color(18-bit/24-bit)				
Resolution	5 Digits	24240=240*240 64360=640*360 80600=800*600 12720=1280*720 19108=1920*1080	32240=320*240 64480=640*480 10600=1024*600 12800=1280*800 19480=1920*480	48270=480*272 80480=800*480 10768=1024*768 13768=1364*768/1366*768	48320=480*320 85480=854*480 12480=1280*480	
Classification	1 Character	F=COF structure C=Commerce grade S= Harsh environment grade	Y=Beauty grade T=Industrial grade Q= Automotive grade	L=Simple application grade K=Medical grade		
Size	3 Digits	020=2.2inch 040=4.0inch 070=7.0inch 104=10.4inch 156=15.6inch	024=2.4inch 041=4.1inch 080=8.0inch 116=11.6inch 173 =17.3 inch	028=2.8inch 043=4.3inch 088=8.8inch 121=12.1inch 185=18.5inch	030=3.0inch 050=5.0inch 097=9.7inch 140=14.0inch 215=21.5inch	035=3.5inch 056 =5.6inch 101=10.1inch 150=15.0inch
-	-	Separator				
Attribute Code	1 Digit or character	0= Basic type 1= Basic type with shell 2= Analogue video processing platform 3= Android platform 4= Digital video processing platform products A= DGUSII kernel product				
Hardware Serial Number	1 Digit	0 - 9 to distinguish between different hardware versions				
LCD Temperature Level	1 Character	N= Normal temperature W= Wide temperature				
TP Category	1 or 2 Character	N= Without touch panel TR= Resistive touch panel TC= Capacitive touch panel				
Custom Tag	Z+ Number	Z01- Z99, standard is blank				
Extended Memory Tag	F+1 Number	F0= 512MB F1=1GB F2= 2GB F3= 3GB, standard is blank				



## 1.2 Interface Definition and Wiring

Pin Class			Socket Type		
PIN Name	Pin Type	Pin Description	CN1	CN2	CN3
VCC	P	Power supply input	1,2	1,2,3	1
TX4	O	UART4 output	3	4	2
TX2	O	UART2 output	4	5	3
RX2	I	UART2 input	5	6	4
RX4	I	UART4 input	6	7	5
GND	P	Power supply input	7,8	8,9,10	6

① I: INPUT, O: OUTPUT, P: POWER

② PCB pins of the same defined pins have been connected in parallel.

③ CN1: Use 8 Pin 2.0 mm spacing patch socket;

CN2: Use 10 Pin 1.0 mm spacing FPC mount;

CN3: Additional 6 Pin 2.54 mm spacing through hole pad is provided.

④ UART2 is the communication protocol developed by DGUSII, please refer to the detailed description in Chapter 4; T5L DGUS products are equipped with extended UART4, and its configuration and communication need to be completed through DWIN OS program. TA mode is only available for UART2 communications at the moment.

⑤ DWIN adopt TTL/RS232 compatible interface. Users can use 0  $\Omega$  resistor or solder to short connect directly.

R232=0 (short circuit) selects TTL level input; R232=1(disconnect) selects RS232 level.

As shown below, the place is marked by white silk screen.

By default, the factory disconnects the 232 level, and selects the TTL level. That is OFF=232, ON=TTL.




ON: short circuit, TTL level  
OFF: disconnect, 232 level  
232 level is not connected by default

Level selection

### (1) 10 Pin Interface

One-end of the different side FCC row line is connected to terminal block of the screen, and the other end is connected to the DWIN HDL662B adapter board, both blue side face up.


One-end of the double-male USB cable is connected to the adapter board, and the other end is connected to the computer for communication.

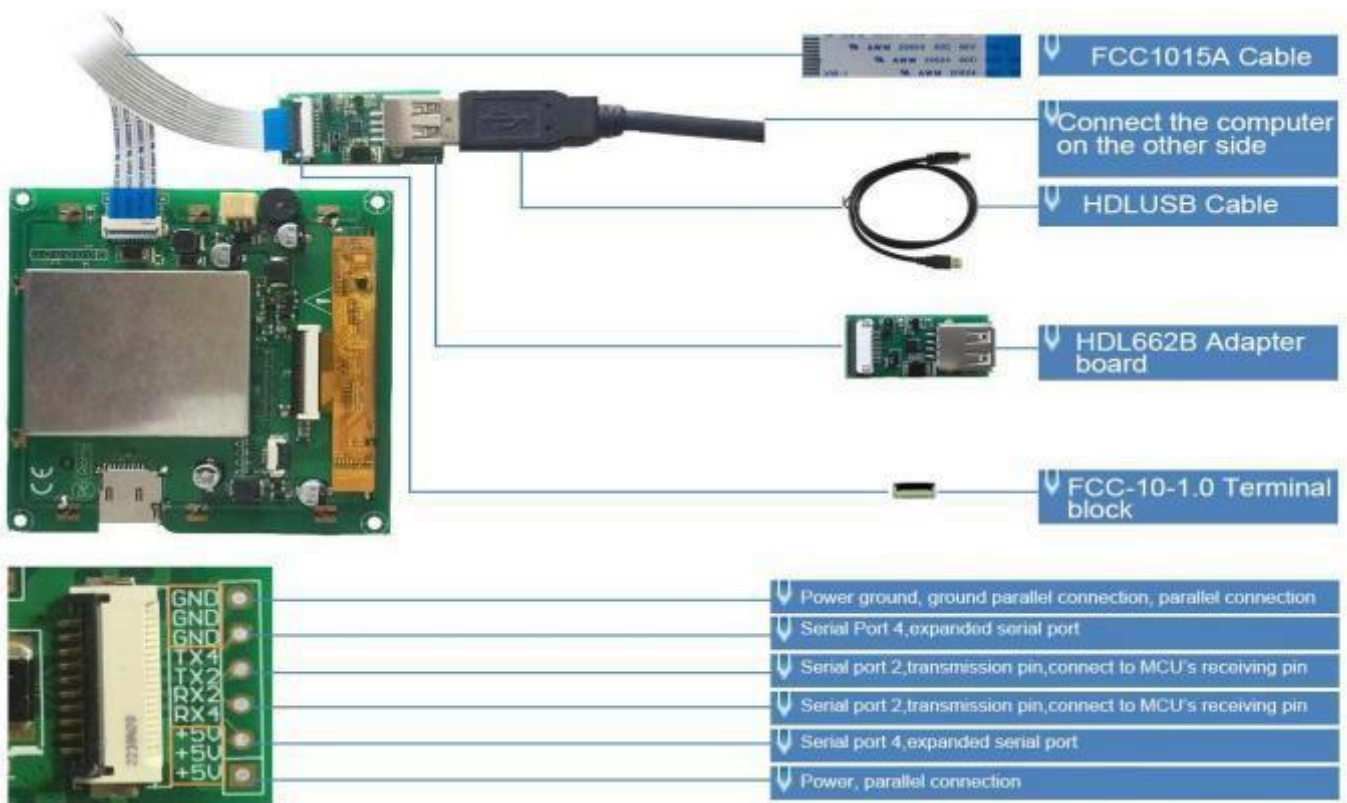

10 pin interface definition and wiring

## (2) 8 Pin Interface

The 8 PIN interface is spaced by 2.0 mm.

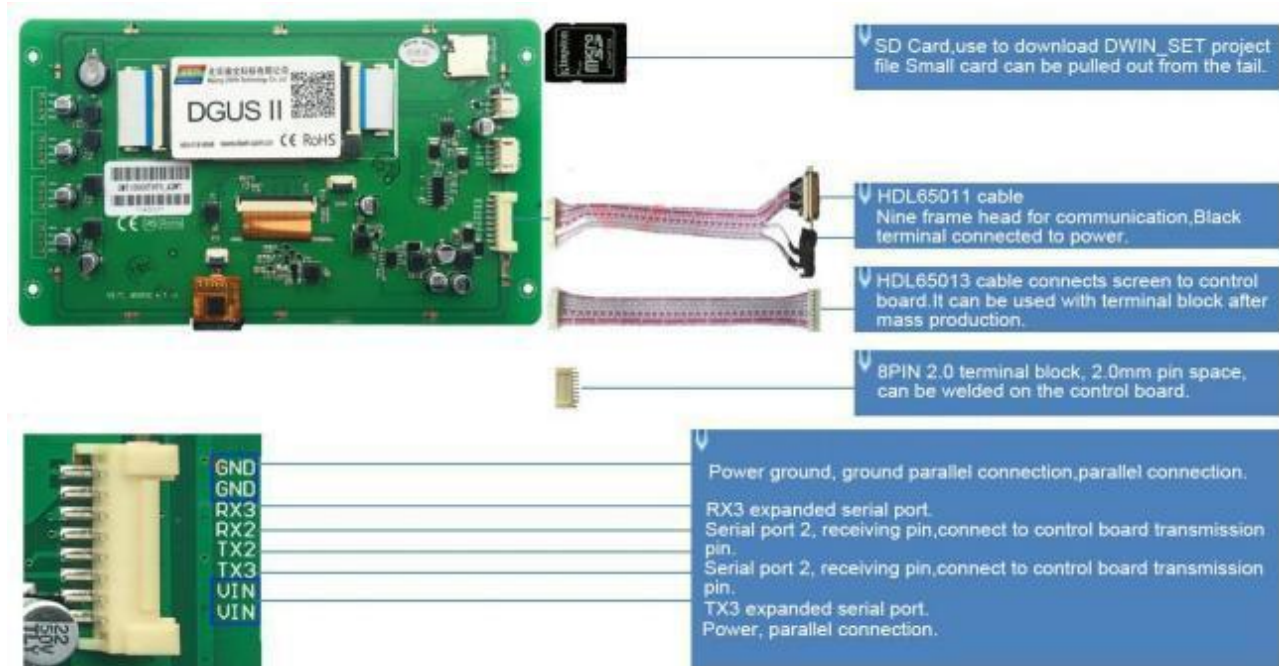

8 pin 2.0 interface definition and wiring

## 1.3 Power Supply

Confirm the voltage and power consumption corresponding to the screen according to the catalogue or data-sheet. Power on the screen with the DC regulated power supply 5V/12V/24V.

The power supply plays a very important role in the normal display of the screen. If the voltage is too small, the current is unstable, and the power is too low, it may cause abnormal display such as flickering and black screen.

## 1.4 Driver Installation

### 1.4.1 Serial Driver

The USB-to-UART chips of DWIN serial adapter boards are XR21V1410 chip and CP2102 chip.

According to the chip type, you can download from DWIN official website or consult customer service to obtain and install the corresponding driver for DGUS screen communication.




1. x86 corresponds to 32-bit Windows operating system
2. x64 corresponds to 64-bit Windows operating system


Serial Port Driver

Steps are as follows .


Step 1: Right-click "Computer"; click "Properties" at the bottom; click "Device Manager" at the top left, right-click " USB Device" on the " Device Manager" operation box, and select " Update Driver".

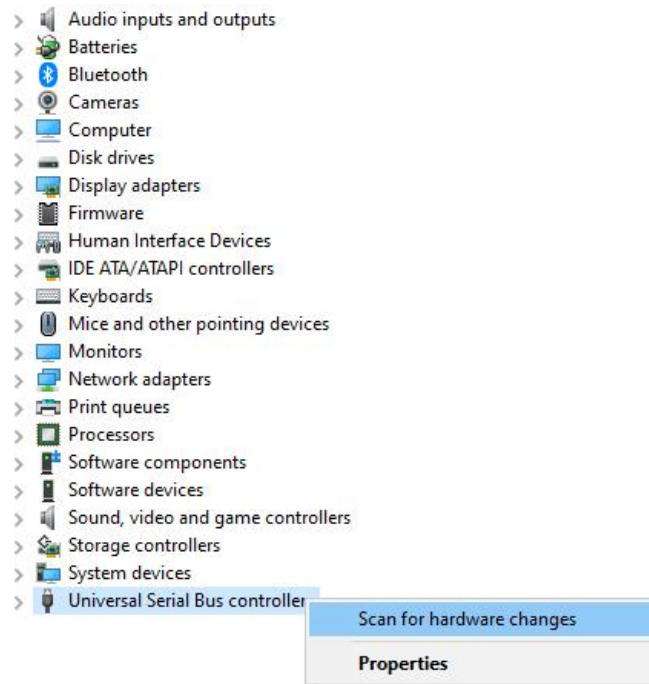

Step 2: Select "Next" in the pop-up window.

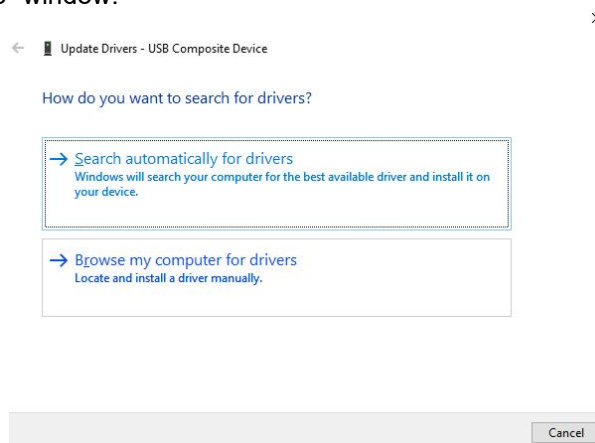

Step 3: Select the path of the serial port driver to complete the driver update.

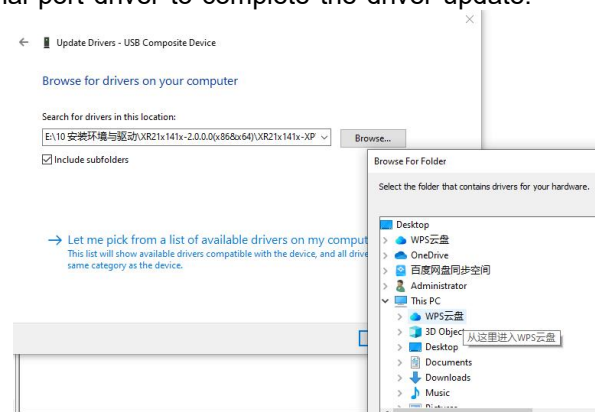

Step 4 : After the installation is complete, the port number corresponding to the driver can be viewed in the device manager.



## 1.4.2 Software Operating Environment Driver

Obtain the software operating environment and double-click to install it.

## 1.5 Software Installation

Download DGUS V7.646 from our official website [https:// www. dwin-global.com](https://www.dwin-global.com) or get from customer service.

### 1.5.1 New Project

Taking the variable data input control and preview function as an example, the steps are as follows .

Step 1 : Prepare the background image of the same resolution as the screen, in jpg /bmp format, 24 - bit color. The pictures name starts from 00 .

Step 2: Download and open DGUS V7.646.

Step 3: Import the image.

Step 4: Configure the Interface.

Step 5: Click save and generate.

Step 6: Project preview.

## Chapter 2 Development System


### 2.1 T5L ASIC

The T5L series ASIC is a single-chip and dual-core ASIC designed by DWIN Technology for AIoT applications with low power consumption, high cost performance, GUI and highly- integrated application, including T5L1 (low resolution) and T5L2 (high resolution). The main features are as below.

- (1) Adopts widely-used, mature, and stable 8051 core. The maximum operating frequency of T5L is up to 250 MHz, 1T (single instruction cycle) high speed operation.
- (2) Separated GUI CPU Core running DGUSII System:
  - High-speed display memory, 2.4 GB/S bandwidth, 24bit color display resolution supporting 800\*600 (T5L1) or 1366\*768 (T5L2).
  - 2D hardware acceleration, the decompression speed of JPEG is up to 200fps@ 180 \* 800 , the UI interface with animation and icons as its main feature is extremely cool and smooth.
  - JPEG stores images and icons in the compressed mode, external memory is greatly reduced to low- cost 16 Mbytes SPI Flash.
  - With a max 400 Hz touch point speed, the touch panel supports resistance or capacitance, and its sensitivity can be adjusted.
  - High- quality speech compression storage and playback.
  - 128K bytes variable storage space, exchanging data with OS CPU core using memory interface, extremely simple to apply.
  - 2-way 10 bit, 800KHz, DC/DC controller, simplify LED backlight, analog power supply design, and save cost and space.
  - 1 - way 15 bit 32Ksps PWM digital power amplifier driver loudspeaker, save power amplifier cost and achieve high signal- to- noise ratio and sound quality restoration.
  - Supporting PC configuration development and simulation, supporting background remote upgrade.
- (3) Separated OS CPU core runs user 8051 code or DWIN OS system, user CPU is omitted in practical application.
  - Standard 8051 architecture and instruction set, 64K bytes code space, 32K bytes on-chip RAM.
  - 64- bit integer mathematical operation unit (MDU), including 64 bit MAC and 64 bit divider.
  - Built-in software WDT, three 16- bit Timers, 12 interrupt signals with the highest four interrupt nesting.
  - 22 IO, 4UARTs, 1 CAN, 7 12-bit A/Ds, 2 16-bit adjustable-resolution PWM.
  - Support IAP online simulation and debugging, unlimited number of breakpoints.
  - Upgrade code online through the DGUS system .
- (4) 1Mbytes on-chip Flash with DWIN patent encryption technology ensure code and data security, eliminate copycat and cloning.
- (5) Reducing crystal requirements and PCB design challenges for a variety of inexpensive wide- range tuned.
- (6) Impedance crystal oscillators and PLL.



- (7) 3.3V IO voltage, can adapt to 1.8/2.5/3.3 various levels.
- (8) Supporting SD interface download and configuration, supporting SD card file reading and rewriting.
- (9) Supporting DWIN WiFi module to access to DWIN cloud directly, and easily developing various cloud platform applications.
- (10) Working temperature ranges from - 40 °C to 85 °C (Customizable IC for - 55 °C to 105 °C operating temperature range).
- (11) With low power consumption and strong anti- interference ability, it can work steadily on the double- sided PCB design, and is easy to pass EMC/ EMI test.
- (12) Using 0.4 mm ELQFP128 packaging, low manufacturing difficulty and low cost.
- (13) Providing **T5L IC+ LCD+ touch panel** cost-effective supporting scheme and comprehensive technical service support for industry customers.

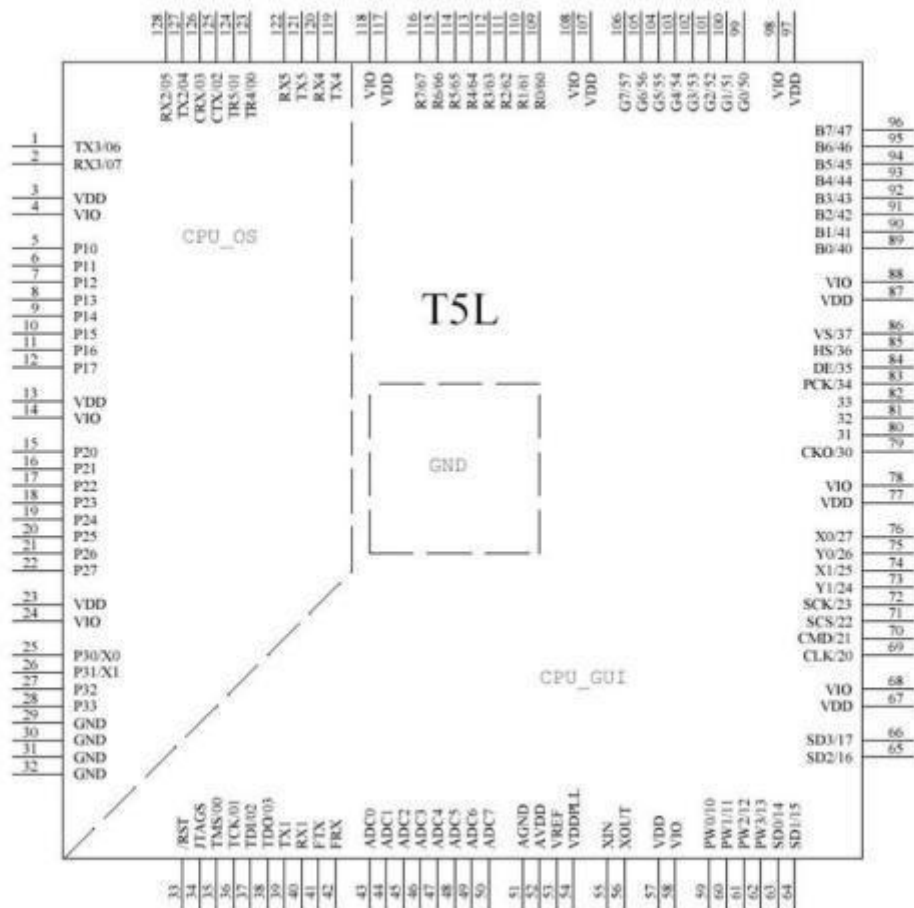

The arrangement of T5L pins

## 2.2 T5L\_DGUS II Development System

DGUS development system is composed of DGUS software and DGUS screen.

DGUS is the DWIN Graphic Utilized Software.

DGUS screen works based on configuration files, so the development process is that users complete variable configuration files by DGUS software.

### (1) Variable programming

Users can make a table in advance to plan the required variable address and facilitate the modification and maintenance of subsequent projects.

### (2) Interface design

The simple interface can be made by yourself; the complex or beautiful interface can be made by UI or DM. Icon-making is the same as image.

### (3) Interface configuration

The interface is configured by DGUS software on PC.

After completing the project, click "save" and "generate" to generate 13.bin touch configuration file, 14.bin display configuration file and 22.bin initialization file.


### (4) Debug

Put the download files into the DWIN\_SET folder of SD card and download them to the screen through the SD card. The sequence is power off - insert SD card - power on - blue screen; download completed: " SD card process END! " - power off; pull out SD card - power on.

### (5) Mass production according to template

After finalizing the template, put the download files, picture files, icons, fonts, etc. into the DWIN\_SET folder, and then mass production download can be realized through SD card.



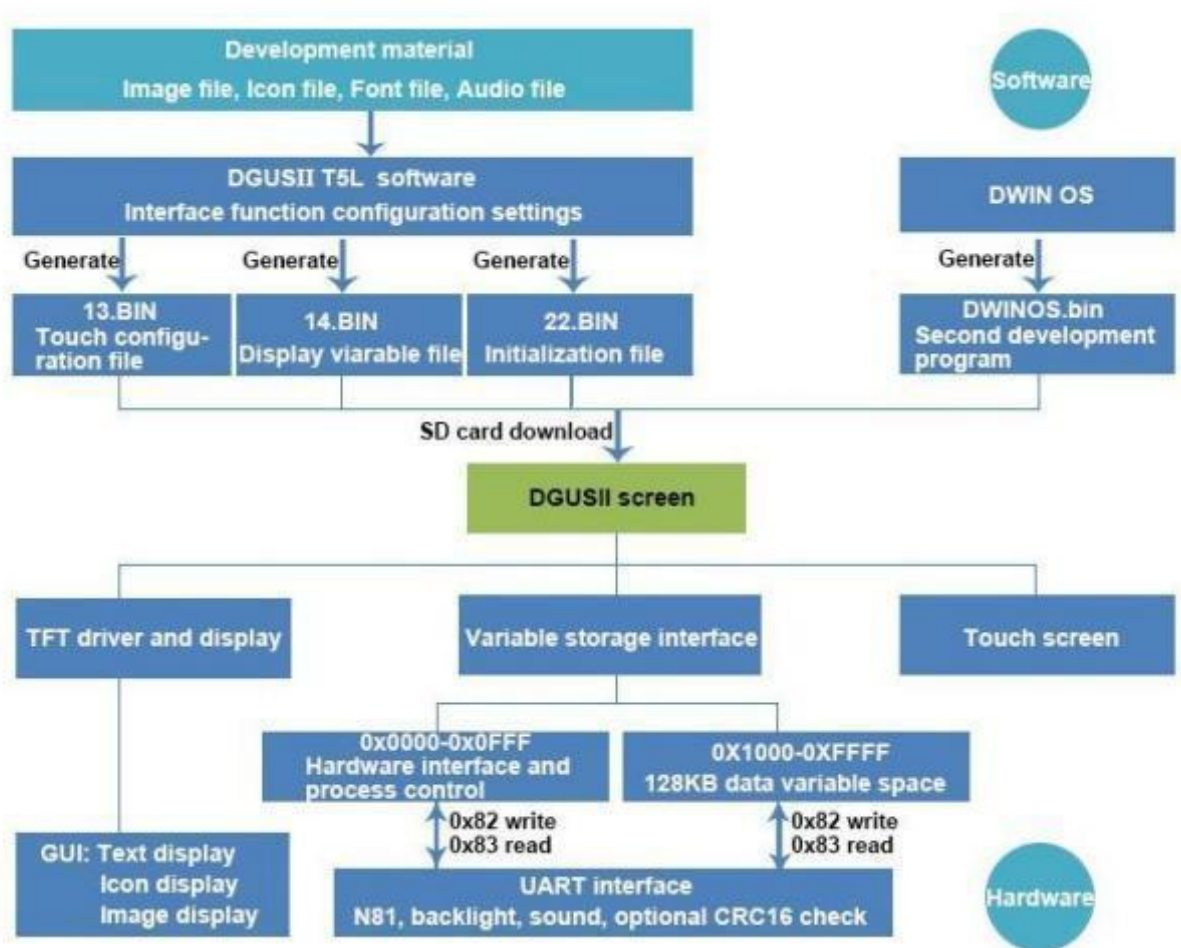

T5L\_ DGUSII development system

## 2.3 Features

Different from the traditional LCM control display through timing or instruction, DGUS adopts the direct variable-driven display mode. Displays and operations are based on the pre-set variable configuration files. Thus, the software architecture is simpler and secondary development is easier.

In the DGUS development platform, it is developed through the use of controls. The attributes and methods of the defined data are encapsulated in the control, and the user only needs to configure and use the control on PC.

DGUS has defined the controls required for common HMI, which is easy to use and efficient.

In some medium industrial and automation project applications, when the entire system consists of relatively independent and fully functional components (such as supporting Modbus). The user can directly use the DGUS as the host, use the 485 to form a network between the device and the DWIN screen, and directly develop users based on the secondary development platform carried on the screen. The main control software runs directly on the DGUS screen, replacing the user's CPU.

The T5L\_ DGUSII platform specifies a refresh cycle of 20 ms, which means that the contents of 13.bin and 14.bin are read once in every 20 ms.

The DGUSII development platform supports up to 256 variables per page, so the processing capability of DGUSII is very powerful.

OS operating mode: real-time operation (1 8051 core runs GUI and 1 8051 core runs user code on DWIN OS platform, which are completely independent). Thus users do not have to worry about whether DGUS and DWIN OS will affect each other when they run on the same system.

The main features of DGUSII software platform based on T5L ASIC CPU are as follows .


- (1) Based on T5 L dual- core ASIC, GUI and OS cores both run at 200 MHz main frequency (350 MHz main frequency version can be customized) , with extremely low power consumption.
- (2) 16 Mbytes low cost SPI Flash(can be extended to 64 Mbytes NOR Flash or 48 Mbytes NOR Flash+ 512 Mbytes NAND Flash), JPEG image, icon compression storage, You can specify the size of background image storage space.
- (3) 512 Kbytes Nor Flash in- chip user database.
- (4) 256Kbytes data variable space.
- (5) Up to 255 display variables per page.
- (6) Support standard T5 DWIN OS platform or 8051 OS CPU core development: hardware CAN lead to 20 IO, 4 UARTs, 1 CAN, multiple ADs, customized services available.
- (7) 20mS DGUS cycle, extremely smooth UI.
- (8) Display variables can be opened, closed or modified in the application to achieve complex display combination functions.
- (9) Touch instructions can be opened, closed or modified in the application to realize complex touch combination functions.
- (10) Support SD interface download and configuration, download file statistics display.

- (11) Support CTP sensitivity adjustment, convenient for users to install the panel ( the thickest to 6 mm toughened glass) application .
- (12) Data variable display, automatically recognize and support the zigzag optimization of the 8 bit encoding font library character display, to support non- standard fonts (such as digital tube font), non- half corner characters display; 8 bit coded word library using DWIN tool software generation.
- (13) Support pre-installed configuration module development mode, greatly improve the speed and quality of UI development.
- (14) Support UART1 online update software and font library, convenient debugging.
- (15) Support TP handwriting input method (need to customize hardware).
- (16) Support digital camera real- time monitoring display (need to customize hardware).

## 2.4 Software Process

In the T5L\_ DGUSII development platform, the configuration of the touch operation of touch panel is also stored in 13.bin file in the same way.

The characteristic attributes of variables (characters, data), various animations and other functions to be displayed are represented by codes and stored in the corresponding address of 14.bin file. The operation in the development software of DGUSII is to configure the control of display function or touch function. When the system is powered to run, the system will call 13.bin file and 14.bin file, and then the HIMI can run normally.

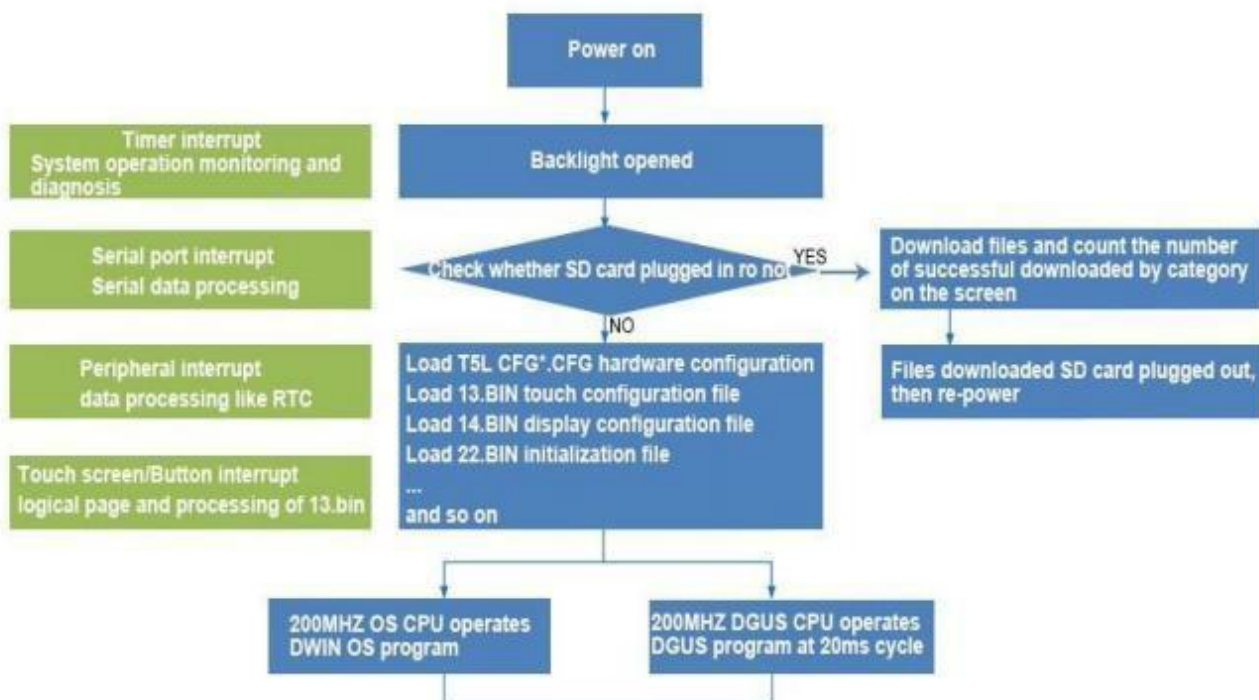

## 2.5 FLASH Memory Allocation

The 16 MB Flash memory is divided into 64 fixed 256 KB subspaces, and the file ID ranges from 0 to 63. According to the different contents of the stored files, the memory is mainly divided into two parts:

- (1) 4-12MB font space can save BIN, HZK, DZK format files, the file ID ranges from 00 to 47
- (2) 4-12MB picture space can save ICL files of background picture library and ICL files of icon library. The file ID ranges from 16 to 63.

### INFO:

Note that there are overlaps between the font space and the image space, therefore you should avoid conflicts when naming ID.

For the T5L1 CPU platform, the size of a single picture file in the packed ICL file should not exceed **256KB**, and that in the T5L2 CPU platform should not exceed **768KB**. The download file must be placed in the DWIN\_SET folder of the SD card root directory, which must be a 4 KB sector, FAT32 format SD or SDHC card.

After familiarizing with the division of the shared interval range, you can set the allocation by yourself.

For example, the font file at the user's 23 position occupies 10 intervals. At this time, the background image position cannot start from 32, but needs to start from the 33 position. If the user has a background image that is displayed as a black screen, while other images are displayed normally, check whether the page size exceeds 256KB.




## 2.6 RAM Memory Variable Address Space

The RAM space is fixed at 128KB, which is divided into 0x0000-0xFFFF. Each variable address corresponds to 2 bytes of the corresponding space. A byte corresponds to 8 bits of the corresponding space.

Among them, 0x0000-0x0FFF is the system variable interface address space, which cannot be customized by the user; 0x1000-0xFFFF is available for users.

If 8-channel curves are used at the same time, 0x1000-0x4FFF will be used as the curve buffer address, at this time this part is occupied and cannot be used by other controls.


Then the user available address range is: 0x5000-0xFFFF.

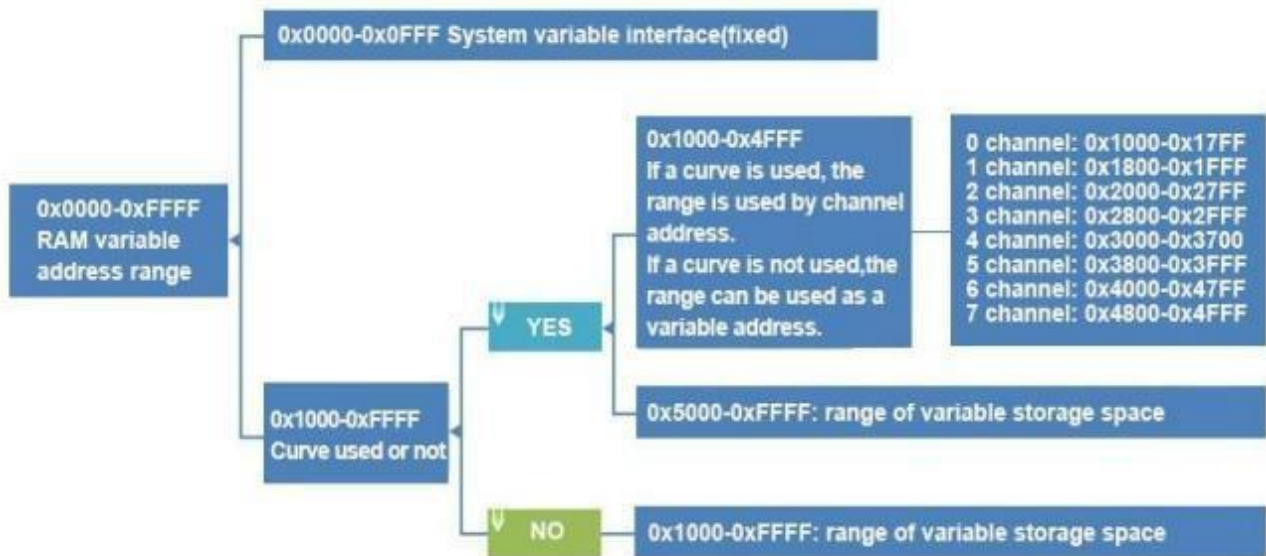

The variable address is the first address of the subspace in which one or more variables are stored in the RAM space, and the code of the display variable or the value of the state variable is stored in the space pointed to by this address.

For example, set the variable address of a text display control to 0x5000 and the text content displayed in the control is "Beijing DWIN Technology", then the storage method in the RAM space is shown in the following figure.

It can be seen that 2 bytes of content are stored in each address.

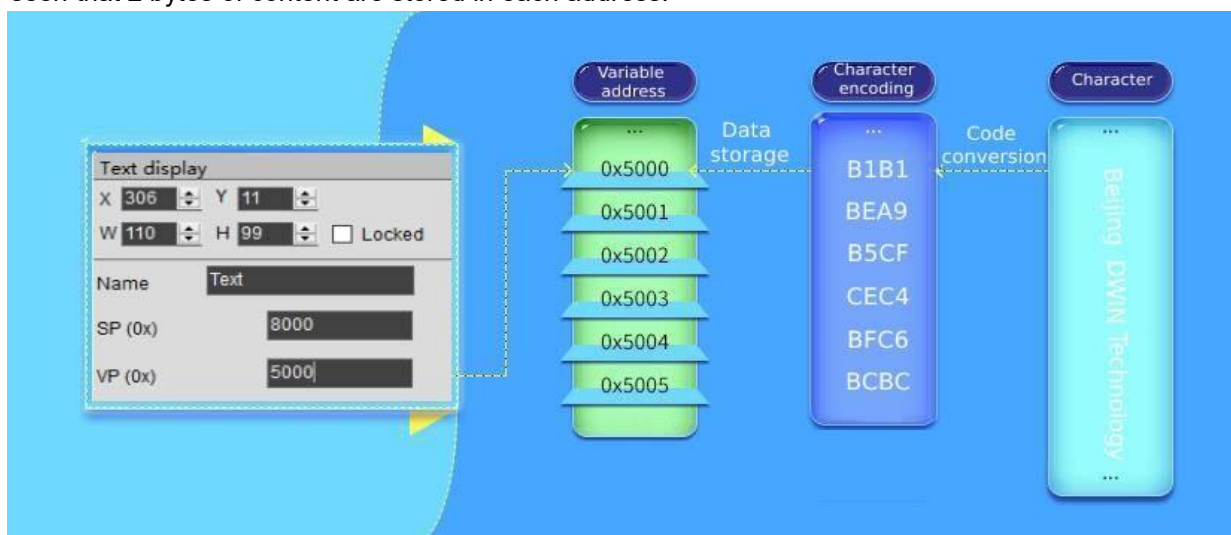

Storage method of data in variable address



If you need to change the characters displayed in the text display control, you only need to change the character encoding stored in the corresponding variable address. The data stored in the variable address can be modified by sending instructions and typing on the touch screen. For example, modifying the text display control can be realized through the text input control. It is only necessary to set the same variable address for the two controls. At the same time, the value stored in the variable address can also be modified by sending instructions.

For detailed instructions, please refer to Variable Display Control.

## 2.7 RAM Description Pointer Space

The description pointer(SP) is the first address of the subspace in the RAM space that stores the attributes describing a variable. The space pointed to by this address stores the attribute values of the display variable, such as display coordinates, color, and font size.

It should be pointed out that the SP and the variable pointer(VP) share the RAM space, and the overlapping of the space should be avoided when assigning variable addresses.

The explanation will be combined with the text display control. (For more instructions on the specific usage of SP, please refer to chapter 7 of this document).


As shown in the table below, "SP offset" indicates the address length that needs to be offset (increased) on the basis of the description pointer(SP) address, and its unit is the word length of "Word". "Definition" explains the attributes represented by this offset address, the common attributes are: coordinate position, color, character size, alignment, etc. This is a common attribute of software functions, but other attributes according to different types. It should be noted that some attributes occupy a word-length address or multiple addresses, some attributes only occupy one byte address, as shown in the table below, 0x04:H high byte indicates the font location, 0x04:L low byte indicates the font size, understand the description pointer usage after understanding the high and low byte writing.

SP Offset	Definition	Length (bytes)	Description
0x00	*VP	2	Variable pointer
0x01	X, Y	4	The starting display position, which displays the coordinates of the upper left corner of the string.
0x03	COLOR	2	Display Color
0x04:H	Lib_ID	1	ASCII font location
0x04:L	Font size	1	The number of dots in the x-direction of the character.
0x05:H	Alignment	1	Text color.
0x05:L	Integer digits	1	0x00=left-aligned 0x01=right-aligned 0x02=centered
0x06:H	Decimal places	1	Index in the FLASH memory of the ASCII Font touse.
0x06:L	Variable data type	1	0x00: Integer (2 bytes). Range: -32768 ~ 32767 0x01: 32-bit Integer (4 bytes). Range: -2147483648 ~ 2147483647 0x01 = long integer (4 bytes) in the range -2147483648 to 2147483647 0x02=*VP high byte, unsigned, range 0 to 255 0x03=*VP low byte, unsigned, range 0 to 255 0x04= very long integer (8 bytes), the range is -9223372036854775808 to 9223372036854775807 0x05=unsigned integer (2 bytes), range 0 to 65535 0x06=unsigned long integer (4 bytes) in the range 0 to 4294967295
0x07:H	Len_unit	1	Variable unit (fixed string) display length, 0x00 means no unit display
0x07:L	String_Unit	Max1 1	Unit string, ASCII encoding.

The corresponding relationship between the control properties and the instruction storage format table is shown in the figure below, and other properties can be deduced by analogy.



The storage relationship of pointer address parameters as shown in the figure below

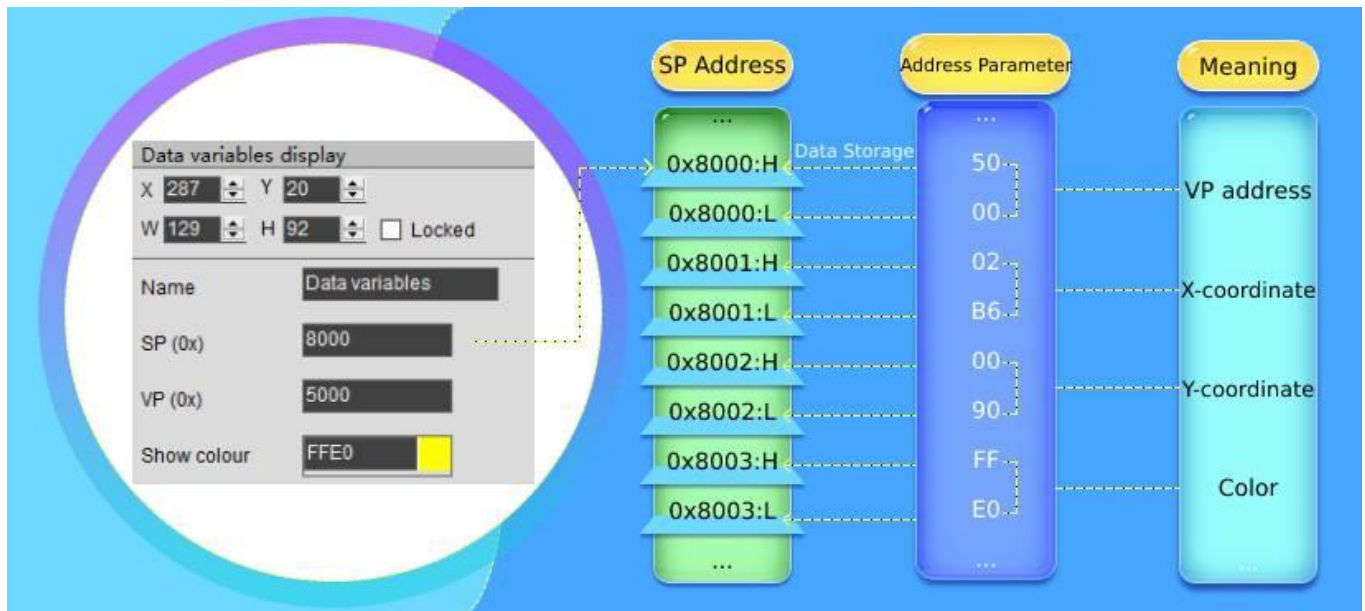

Examples of other description pointer applications are as follows .

Function	Send Instruction	Effect
Change Data Display Position	5A A5 07 82 5001 0000 0000	The coordinates of the upper left corner of the character display position become (0,0).
Change ASCII Character Lattice Size	5A A5 05 82 500A 30 60	Change the character lattice to 48 * 96 . Note: The lattice values in the X and Y directions need to be modified.
Hidden Characters	5A A5 05 82 5008 0000	Change the character length to 0 to hide characters.
Change Font File	5A A5 07 82 5009 003C 1010	Call size 60 font, the font size is 16 *16. That is, after changing the font file, the character size will also change at the same time.

SP setting problems:

(1) In case of no curve display, 0x1000-0x7FFF can be used for VP, while 0x8000-0xFFFF can be used for SP. The distinction is to avoid conflicts caused by pointer address confusion.

(2) In case of curve display, and all 8 channels are used, 0x1000- 0x4FFF will be used as the curve buffer address . Users should not use this part of the address as the address of other variables.

0x5000-0x7FFF can be used as the variable address range; 0x8000-0xFFFF can be used as the description pointer range. In the application, the user can plan the address range of VP and SP according to actual needs.

The division of VP and SP here is only for your reference.

(3) The same display controls SP can be set to 10H addresses, and different types of display controls can be set to 30H addresses. The distinction is to avoid display conflicts caused by pointer address confusion.

(4) If the SP of the same type of display controls is set to be the same, it can only be realized by copying to other pages. The font size and other attributes shall not be changed and the controls shall not be moved, otherwise It will cause abnormal display.



## Chapter 3 SD Card Interface

### 3.1 MicroSD(TF) Card Format

All hardware parameters and data of T5L screen can be set by the SD/TF card interface, and the configuration files must be in FAT32 format.

Non-DWIN-official SD cards need to be formatted under the DOS system. Otherwise, the number of downloaded files is 0 during the blue screen downloading, or the screen fails to recognize the card to enter the download interface.


Format operations are as follows.

Step 1: Start-run-input "command" ("CMD" for win7) to enter DOS system;

Step 2: Input command: `format/q g:/fs:fat32/a:4096` (Note that `q` is followed by a space). Click enter after input.

Where `g` is the disk number of SD card displayed on PC, and the corresponding disk number of different users is different (for example, it can be "h" or "i" ).

Note: The SD card cannot be completely formatted to FAT32 by right clicking formatting. Generally, it is only for the SD card size of 1-16G.

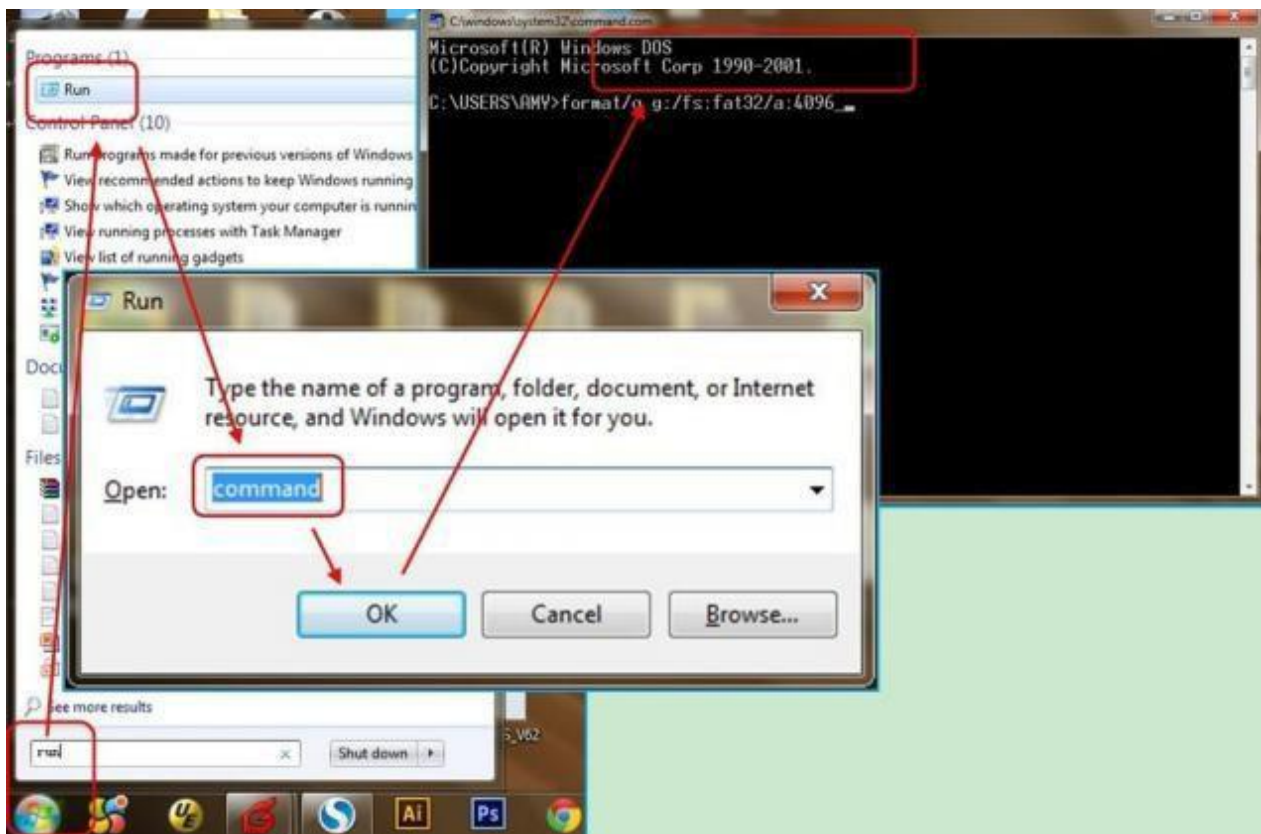



### 3.2 SD Card Interface Download Method

SD card does not support hot swap updates. In order to prevent damage to FLASH, you must power off the screen before insert the SD card, and then power on to download. During the downloading, please be sure to keep the power supply. Power failure in the middle may cause a black screen abnormality.

T5L\_ DGUSII is different from T5\_ DGUSI. In practical applications, the background images of the T5L screen needs to be downloaded in ICL file, which can be generated by DGUS. JPEG pictures cannot be recognized directly.

The generation of download files is as follows.

- ① Create a DWIN\_ SET folder in the SD card root directory.
- ② Put the ICL file, font library, configuration files, etc. to the DWIN\_ SET folder.
- ③ When the screen is powered on, it will detect that the SD card and recognize whether there is a folder named DWIN\_ SET in the SD card root directory.

If the folder is successfully detected, the screen will download the relevant files to FLASH. Folders under the DWIN\_ SET folder cannot be read.

- ④ When the blue screen indicates that the download has completed, power off the screen, pull out SD card, and power on again. Then the project has been downloaded in the screen successfully.

DWIN standard screen, will only recognize folder named DWIN\_ SET if not specially customized or with download encryption. Other folders can not be recognized.

### 3.3 Download File

#### 3.3.1 Download File Type

The SD/SDHC interface of T5L screen supports download and update of the following files.

**SD card does not support hot swap update. You must power off the screen before insert the SD card, and then power on to download.**

File Type	Naming Rule	Description
Program file	T5L_UI*.BIN T5L_OS*.BIN	Underlying kernel firmware program
DWIN OS program	DWINOS*.BIN	DWIN OS program, the code must start from 0x1000.
OS CPU 8051 program	T5L51*.BIN	Program based on the standard 8051 platform. You can choose to encrypt or not to encrypt when downloading.
Program configuration or initialization	T5L*.BIN	LCD screen TCON configuration or initialization procedure.
NOR Flash data base	ID+(optional) file name. LIB	Each ID corresponds to 2 KWords memory with ID range of 0-79 . The database is located in on- chip NOR FLASH of 160 KWords. It can be used to save user data or DWIN OS program library files.
Font file (4~ 12MB)	Font ID+(optional)file name. BIN/ DZK/HZK/GTF, font ID 00-47.	Font ID: 00-47; Pre-install standard ASCII 0# font library.
DGUS input method file	12*.BIN	Fixed storage in 12 font location
DGUS touch control file	13*.BIN	Fixed storage in 13 font location. Size limit: 256 KB
DGUS display control file	14*.BIN	Fixed storage in 14 font location. Size limit: 256 KB, in DGUS II format.
DGUS variables initialization file	22*.BIN	Fixed storage in 22 font location. Load 0x2000 - 0xFFFF address content and initialize 0x1000-0xFFFF variable space.
JPEG image and icon file	Font ID+ (optional) filename. ICL	Must be a ICL file in DGUSIII format. For multi FLASH expansion, one ICL data is saved in one Flash. <b>For product kernel of DGUS2 V4.0 and above, you must use DGUS software V7.623 and above to generate ICL files.</b>
Music file	Font ID+ (optional) filename. WAE	Must be in DGUSII format, generated by DWIN tools.
UI configuration file	Configuration module ID+ (optional) filename. UIC	The configuration module ID is from 0x0000 to 0xFFFF, and each ID corresponds to 32 KB memory space. For multi FLASH expansion, one configuration module data is saved in one Flash.
Hardware configuration file	T5LCFG*.CFG	Configure CRC status, baud rate modification, touch panel sound control, touch upload mode, display direction, etc. <b>Don' t download incompatible CFG files that may cause screen malfunction. Users can contact customer service to get the CFG files needed.</b>
CRC check file	T5*.CRC	Perform CRC32 check after SD card download.

16 MB Flash memory ( max expandable to 64 Mbytes Nor Flash or 48 MB Nor + 512 MB NAND Flash) is divided into two parts:

- (1) 4-12MB font library space. Single space is 256Kbytes for font library, icon libraries, configuration files.
- (2) 4-12MB storage space for background images (.ICL files).

For T5L1 screens, the size of a single JPG file should not exceed 248 KB, and for T5L2 CPUS, the size of a single JPG file should not exceed 760 KB.

When using NAND Flash expansion, it must be soldered in the position of expanded Flash 3. Corresponding font library ID=0xC0-0xFF, each of 8MB.

The download file must be placed in the SD card root directory DWIN\_SET folder. And the SD card must be a 4KB -sector, FAT32-formatted SD or SDHC card.

### 3.3.2 Generation of Download Files

From Chapter 2 , we know that when configuring GUI for DGUSII screens, we need to prepare material such as background images, icons, font libraries, etc.

DGUSII\_ T5L calls configuration files by the file name number. Therefore, the files should be named by Alabaster numbers in order.

For example: 32\_Background\_Image.ICL and 48\_Icon\_Library.ICL.

#### 3.3.2.1 ICL Background Image Library File

1. Background images should be in JPEG, BMP or PNG formats.
2. The image resolution should be the same as the screen in 24-bit color.
- 3 . By default, image 0 in the ICL file will be displayed at booting. The images are named according to the Arabic numbers, e.g. 00\_boot, 01\_function, 02\_menu.
- 4 . You need to convert images into .ICL file to download it to the screen. That is, the images are packaged and downloaded in the form of a library file.
- 5 . Background image ICL files are used to display background images. If you name background image ICL as 32 .ICL, you need to write 0x20 in the 0x08 address of the CFG file so that the underlying programs can correctly read and identify the ICL file.  
If the CFG file is empty, the screen will be black (with a weak backlight). In this case, you should check the 0x08 address in the CFG file.
6. For T5L1 screen, the single image size in the ICL file should not exceed 256KB; For T5L2 screen, that should be less than 768 KB. There is no limit to the size of the original image materials.

When using DGUS to generate ICL files, if a image in the generated ICL file is larger than the limit, you should reduce the quality percentage of images according to the prompt.

You can also view size information of the ICL file by DGUS ICL generator. If scattered dots are displayed in background images, you can select the image type 4:4:4.

#### 3.3.2.2 ICL Icon Library File

1. The max resolution of images in the icon library should not exceed 1024\*1024, or DGUS will automatically compress them to 1024\*1024;
2. The images should be in JPEG, BMP or PNG formats in 24-bit color;
3. The images should be named by Alabaster numbers in order.

In the FLASH storage space, a single font space is 256 KB in size.

When a single icon library file exceeds 256 KB, it is necessary to strictly calculate the interval occupied by the icon library, otherwise it may cause a conflict in the position of the icon interval and cause display abnormalities.

### 3.3.2.3 Font File

DGUS support multiple international font codes:8-bit, ASCII, GBK, GB2312 and UNICODE.

DGUS screen has been pre-installed with ASCII code 0# font library at the factory, which contains all ASCII characters with dot matrix size of 4\*8 ~ 64\*128. Users can directly call the 0 # font library to realize the display of numbers, letters and symbols.

When you need to use other coded font libraries, you need to generate them through the font generator. DGUS support BIN, DZK, HZK font files.


### 3.3.2.4 22.Bin Initialization Variable File

The initial value of the variable address is 0 by default when it is powered on. If you need to set an initial value other than 0, you need to turn on the function of loading 22 file at power-on by configuring the CFG file 0x05.5 address.

Generally, 22.bin can be directly generated by DGUS, and the initial value is automatically written when the configuration files are generated. Users can also edit values in the 22 file by UltraEdit.

Note that DGUS variable address is in word, while in UltraEdit 22. bin is edited by byte. Therefore, when modifying the VP 0x2000 word initial value, you should modify 0x4000 byte address in UltraEdit.

When editing 22.bin, you need to copy it on the desktop. Before downloading, put them back to the DWIN\_SET folder. Otherwise, modifications will overwritten when the project is saved and generated.

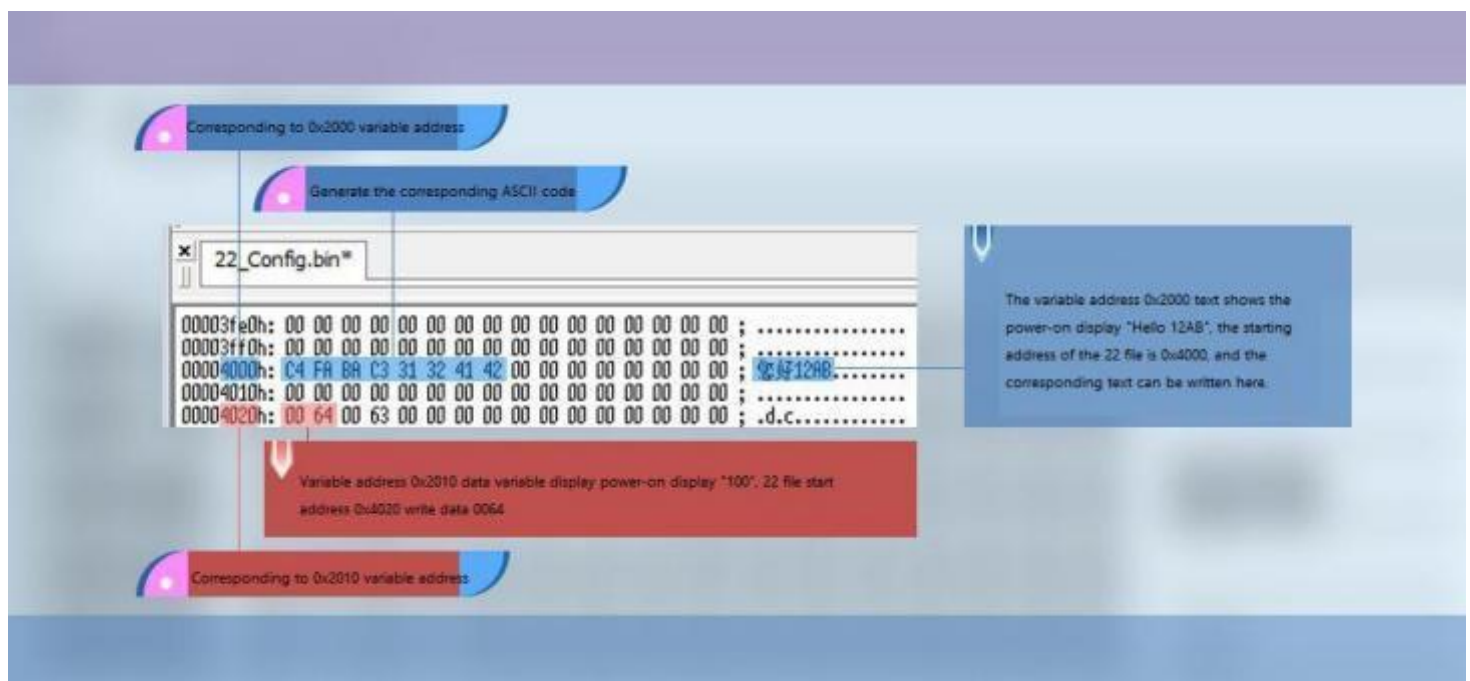


22 file initial value modification

### 3.3.2.5 System Configuration


T5LCFG\*. CFG hardware configuration file is in binary data format and can be edited by UltraEdit. The description is as follows :

Category	Address	Length	Definition	Description				
Recognition configuration	0x00	5	0x54 0x35 0x4C 0x43 0x31	Fixed content.				
System configuration	0x05	1	Parameter configuration	.7: UART CRC check 0=close 1=open				
				.6: Buzzer / music playback selection. 0=Buzzer 1= music playback				
				.5: Load 22 file initialization VP at power-on 1= Load 0= No Load				
				.4: Touch variable automatic upload 1= On, 0= Off				
				.3: Touch panel audio 1= Open 0= Close				
				.2: Touch panel standby backlight 1= Open 0=Close				
				.1-.0: Display direction 00 = 0° , 01 = 90° , 10 =180° ,11 = 270°				
	0x06	1	Parameter configuration 1	.7: PWM output 0= user control; 1= PMW backlight brightness control, 1 KHz frequency.				
				.6: Expand SPI NAND Flash. 0=not expanded 1=expanded.				
				.5: Set 1 to start SPI NAND Flash format (data will be cleared).				
	0x07	1	Music WAE file location	.4: SPI NAND Flash memory. 0=1Gbits; 1=4 Gbits.				
				.3: Set to 1 to erase all off-chip Flash contents.				
				.2: AD return value resolution selection. 0=12 bit; 1=16 bit.				
				.1: OS CPU user 8051 program download encryption. 0=unencrypted; 1=encrypted. (In case of encryption, users should use DWIN tool to encrypt before downloading the 8051 program.				
	0x08	1	Parameter configuration 2	.0: OS core running selection during SD download, 0=not allowed, 1=running.				
				0x00-0x3F(00-63)				
<p>Example: press button to music playback</p> <p>1. Content understanding</p> <p>(1) The relationship between .wae and .wav files</p> <p>The voice ID of the touch button refers to calling the .wav voice entry in the .wae voice package, and the .wae voice package contains N .wav voice entries.</p> <p><b>.wae voice package naming range: 0-63.</b></p> <table><tr><td>0x07</td><td>1</td><td>Music WAE file location</td><td>0x00-0x3F(00-63)</td></tr></table> <p>Naming range of <b>.wav</b> voice: <b>1-63, 0 means no touch voice and does not support playback</b>. The touch voice ID is only up to 0x3F, that is, 63, and the setting of a larger value is invalid, and it will jump back to 0x3F. (<b>When using the 0xA0 command to play, the range of .wav is 0-255</b>).</p> <p>(2).wae file size calculation</p> <p>The .wae voice package occupies 16MB, and the calculation method of Nor Flash is the same as other font files.</p> <p>"x" file size*1024/256=N (occupies several 256KB subspaces), such as "x" file 1.23MB, 1.28*1024/256=5.12, rounded up, 0.12 also occupies a part of 256KB, need to count one , that is, the "x" file occupies 6 spaces, and 16, 32, and 48 custom files are calculated according to this.</p> <p>For example, the number 16 music file is 1.23MB, that is, the file occupies 6 spaces of 16, 17, 18, 19, 20, and 21. At this time, if you put a Chinese character font and name it 17, the name is wrong, and you need to put it in another location according to the above calculation.</p> <p>Adjacent .wav voice materials only need to have different names and IDs, and the program will index the .wav serial number to play, such as one voice 1S, one voice 3S, two voices can be named consecutively, and the longest voice duration of one voice is 1024S.</p>					0x07	1	Music WAE file location	0x00-0x3F(00-63)
0x07	1	Music WAE file location	0x00-0x3F(00-63)					



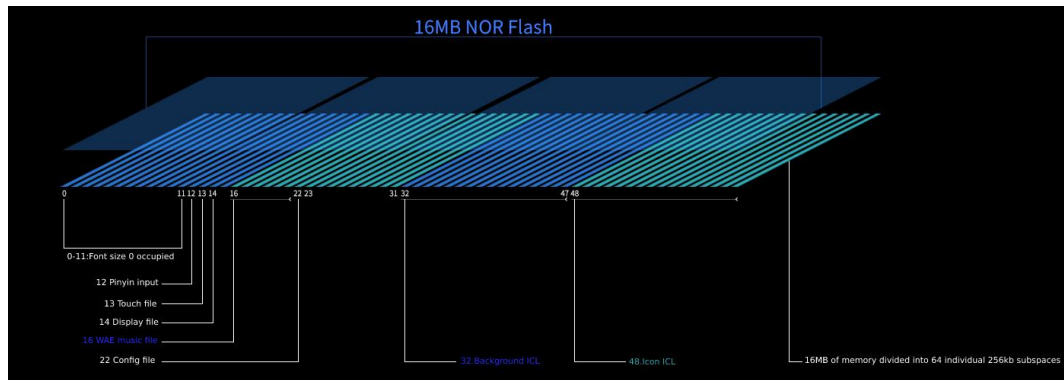


## 2. .wae voice pack generation

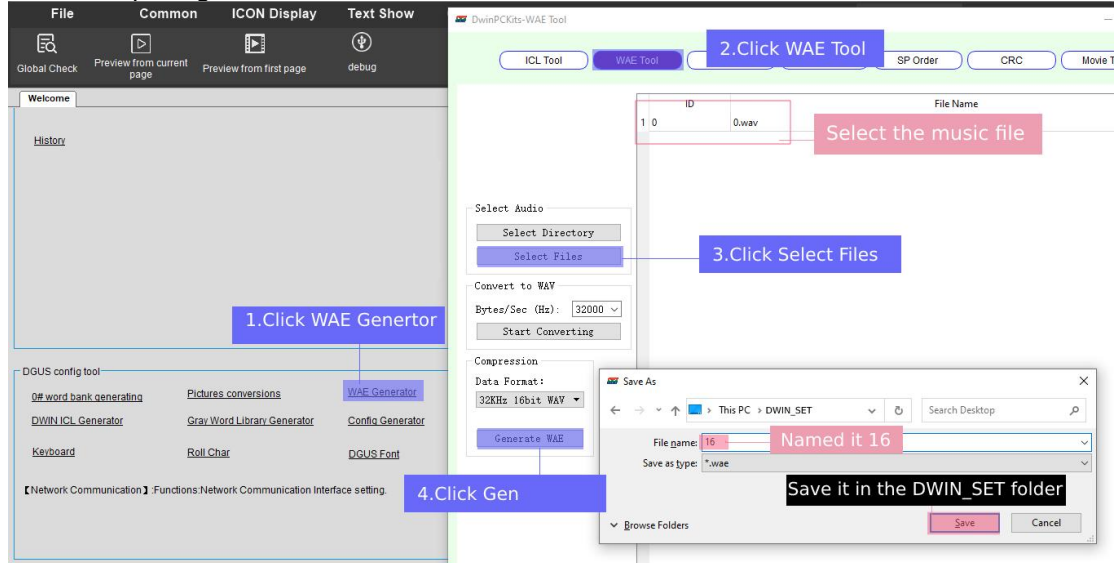

## 3. Touch ID Settings

The range is 1-63, and the software input box ID is hexadecimal.

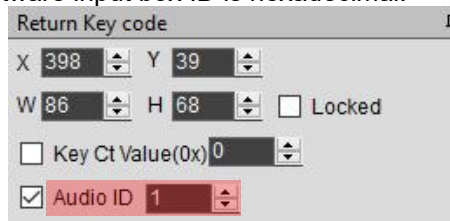

## 4. CFG file hardware configuration

(1) Turn on the hardware function:

CFG file 0x05 address write 0x78, 0x05 address 8 bits 0111 1000, 0x05.6 bit write 1 to start music playback.

(2) Specify the .wae voice package:

Write 0x10 in CFG file 0x07 address, specify the 16th .wae voice package, and the attached DEMO configuration can be used directly.

```

0 1 2 3 4 5 6 7 8 9 a b c d e f
00000000h: 54 35 4C 43 31 78 00 10 20 28 00 1C 64 32 00 64 ; T5LC1x.. (...d2.d
00000010h: 5A A5 00 08 04 0C 01 E0 08 04 13 03 20 08 0E 00 ; Z?....?... ..
00000020h: 5A 16 FF 00 00 00 FE 00 6E 0B B8 00 F0 0A ; Z. ...?n??
  
```


## 5. File download

Put "16.WAE" and "T5LCFG.cfg" configuration files, 13, 14, 22, (32\_background picture), (48\_icon) and other files into the DWIN\_SET folder, download them to the screen through the SD card, click the touch ready to play.

## 6. speaker

(1) With speaker interface

The power of the speaker is 3-5W, the impedance is 8Ω, the 2Pin seat is connected to the speaker interface, regardless of the positive and negative poles

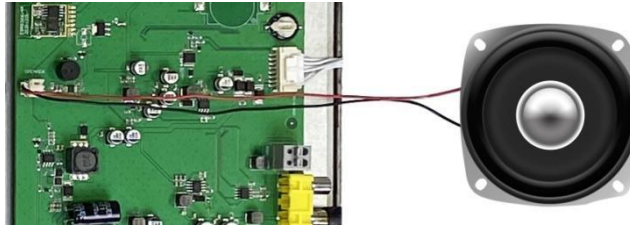

## (2) Without speaker interface

Write 0x78 in the CFG file 0x05 address to start music playback, and the buzzer can also play music. Because the circuit design of the speaker and the buzzer are different, it will cause the buzzer to heat up. This method can be used as a test, and it is not recommended for long-term use.

## 7. 0xA0 command play

Voice file making and downloading is the same as above.

5AA5 07 82 00A0 0001 4000

Meaning: 0x5AA5 frame header; 0x07 data length; 0x82 write command;

0x00A0 system variable interface playback voice address;

0x00 Music segment naming serial number position, range 0x00-0xFF, ID number of .wav file;

0x01 is fixed to 0x01, the whole piece of music is played;

0x40 is the volume, the unit is 1/64.

0x00 is the playback progress, you can write 0x00, read-only.

Download 480\*480DEMO to the screen.

Play the first .wav voice command: 5AA5 07 82 00A0 0001 4000

Play the first .wav voice command: 5AA5 07 82 00A0 0101 4000

Play the second .wav voice command: 5AA5 07 82 00A0 0201 4000

Play the 32nd .wav voice command: 5AA5 07 82 00A0 2001 4000

Play the 63rd .wav voice command: 5AA5 07 82 00A0 3F01 4000

Play the 255th wav voice command: 5AA5 07 82 00A0 FF01 4000

	0x08	1	Background image ICL file location	0x10-0x3F(16-63), correspond to 12MB-4MB background image size.
	0x09	1	Touch panel reporting point rate	0x01-0xFF. By default 0x28, reporting point rate=400 Hz/set value
	0x0A	2	UART baud rate	Baud rate =3225600/set baud rate (max of 0x03FF) For 115200bps, set value=0x001C.
Backlight standby configuration	0x0C	1	Normal and startup brightness	0x00-0x64, unit 1%
	0x0D	1	Standby brightness	0x00-0x64, unit 1%
	0x0E	2	Wake up time after standby	0x0001-0xFFFF, unit 10 ms



LCD configuration	0x10	2	Display_Config_En	0x5AA5 = Enable the configuration. It has been configured at the factory. Users do not need to configure it.
	0x12	1	PCLK_PHS	Data latch phase setting. 0x00=PCLK up 0x01=PCLK down
	0x13	1	PCLK_DIV	PCLK frequency(MHz)=206.4/PCLK_DIV
	0x14	1	H_W	
	0x15	1	H_S	
	0x16	2	H_D	Horizontal ( X axis) resolution
	0x18	1	H_E	
	0x19	1	V_W	
	0x1A	1	V_S	
	0x1B	2	V_D	Vertical ( Y axis) resolution
	0x1D	1	V_E	
	0x1E	1	TCON_SEL	0x00= do not need to configure TCON
TP configuration	0x1F		Reserved	Write 0x00
	0x20		TP_Set_En	0x5A= Enable the configuration. It has been configured at the factory. Users do not need to configure it again
	0x21	1	TP_Mode	<p>Touch panel mode configuration</p> <p><b>. 7-.4(high 4bit). Select touch panel type:</b></p> <p>0x0*= 4- wire resistive touch panel</p> <p>0x1*= GT911, GT9271 or GT9110 Driver IC capacitive touch panel</p> <p>0x2*= ILI9881H Incell CTP</p> <p>0x3*= ILI driver IC capacitive touch panel such as ILI2117</p> <p>0x4*= ILI driver IC capacitive touch panel such as ILI2130</p> <p>0x5*= Betterlife driver IC capacitive touch panel such as BL8825</p> <p>0x6*= Sili micro driver IC capacitive touch screen such as GSL1680.</p> <p>0x7*= Hynitron driver IC capacitive touch screen such as CST340</p> <p>0x8*= ILI driver IC capacitive touch screen such as ILI231*/251*</p> <p>0xF*= 5- wire resistive touch panel</p> <p><b>.3 Resistive touch panel calibration: 0= off; 1=on, enabled for SD card downloading</b></p> <p><b>.2-.0 ( low 3bit) Touch panel setting: (Only CTP works)</b></p> <p>.2 X coordinate selection: 0= from 0 to Xmax; 1= from Xmax to 0;</p> <p>.1 Y coordinate selection: 0= from 0 to Ymax; 1=from Ymax to 0;</p> <p>.0 X, Y exchange: 0=XY; 1=YY</p>

	0x22	1	TP_Sense	<p>CTP sensitivity setting:</p> <p>0x00-0x1F. 0x00 lowest sensitivity; 0x1F highest sensitivity. Default is 0x14(ILI9881 is 0x01-0x06).</p> <p>0xFF = no touch ( using hardware initials).</p> <p>RTP sensitivity setting:</p> <p>0x10-0xFF, the smaller the value, the higher the precision but the sensitivity lower, the larger the value, the lower the precision and the higher the sensitivity, the factory configuration value is 0x40.</p>			
	0x23	1	TP_Freq	<p>TP frequency selection, suitable for ILI9881 H.</p> <p>Fixed frequency = 0x01- 0x14 , and 0x00 represents frequency hopping.</p>			
Clock output configuration	0x24	1	CKO_Set_En	0x5A= Enable the configuration.			
	0x25	1	CKO_En	0x5A= Enable the output function of CKO (P3.0)			
	0x26	1	CKO_DIV	CKO output clock setting. Frequency = 825.7536 / CKO_DIV MHz.			
Buzzer configuration	0x27	1	BUZZ_Set_En	0x5A= Enable the configuration.			
	0x28	1	BUZZ_Freq_DIV1	Buzzer frequency= BUZZ_Freq_DIV1) KHz.825753.6 BUZZ_Freq_DIV1			
	0x29	2	BUZZ_Freq_DIV2	Factory settings: DIV1=0x6E, DIV2=0x0BB8, correspond to the 2.5KHz frequency.			
	0x2B	2	BUZZ_Freq_Duty	<p>Buzzer duty ratio settings:</p> <p>High level duty ratio=BUZZ_Freq_Duty/ BUZZ_Freq_DIV2. Factory settings: 0x00F0 corresponds to 8% high level duty ratio.</p>			
	0x2D	1	BUZZ_Time	Buzzing time after touch, unit 10 ms; Factory setting: 0x0A			
Power-on initialization file ID configuration	0x2E	1	Init_File_Set_En	0x5A = Start configuring power- on initialization variable file ID.			
	0x2F	1	Init_File_ID	The configured power- on initialization variable file ID, the factory defaults 0x16 .			
System clock adjustment	0x30	1	Sysclk_set_EN	0x5A means this configuration is valid.			
	0x31	1	Sysclk_Adj_Set	<p>System clock adjustment, -2 (0xFE) to +2 (0x02), the unit is 1/224.</p> <p>The factory configuration value is 0x00.</p> <p>Different configuration values correspond to PLL main frequency, CPU main frequency, and baud rate constants as follows:</p>			
				Configuration Value	PLL Main Frequency(MHz)	CPU Main Frequency(MHz)	Baud Rate Constant
				0xFE	818.3808	204.5952	6393600
				0xFF	822.0672	205.5168	6422400
				0x00	825.7536	206.4384	5451200
				0x01	829.4400	207.3600	6480000
				0x02	833.1364	208.2816	6508800
Picture Replace Configuration	0x32	1	Picture_Replace_En	<p>0x5A means enable the picture replacement. If picture replacement is enabled, when the system executes the command related to image display, it will first check whether there is a corresponding picture in the ICL file where the replacement picture is stored, and if there is, it will display it, if not, it will display the corresponding picture in the ICL file specified in location 0x08 of the CFG file.</p>			

0x33	1	ICL_ID	The ID of the ICL file that saves the replaced picture, 0x00 means no replacement (closed).
------	---	--------	---

- Application instructions**  
 It is used to replace single or multiple pictures, which is convenient for users to customize the application.
- Function setting**  
 According to the function description of 0x32 and 0x33, the settings are as follows, **write 0x5A to 0x32 to enable**, **write 0x21 to specify the location at 0x33**, and specify the call through the CFG hardware parameter configuration file. **Cancel replace 0x33 write 0x00**.  
 The background picture file of routine No. 32 is 160KB, and only occupies one 256KB Flash subpage. The spare replacement file is placed at 0x21. If the No. 32 file is 300KB, the spare replacement file needs to be moved back.
- Backup picture**  
 (1) The ID of the backup picture needs to be the same as that of the original picture. For example, if the ID of the original image is 00, the backup picture can be named "00" or "00\_Replacement".  
 (2) Replacement means that the buffer loads the ID data of Flash file No. 33 to the LCD display. The data calling position is different, and the data of No. 32 file is not covered by No. 33 file.
- Display effect**



Reserved	0x30	16	Reserved	Write 0x00
SD download file folder name setting	0x40	2	SD_Set_En	0x5AA5 means setting the name of SD download folder once, which are saved in the screen Flash. It will not be lost after power off.
	0x42	1	Character length of download folder name	0x01-0x08
	0x43	8	Folder name	Up to 8 ASCII characters (only 0-9, a-z, A-Z, -, _ ). Invalid character setting will use " DWIN_SET" as the default value, which is effective after power off and restart.
	0x4B	37	Reserved	Write 0x00.
Power-on backlight delay lighting configuration	0x70	1	Configuration enable	0x5A Start a power-on backlight delay lighting time configuration.
	0x71	1	Delay enabled	Power-on backlight delay start time, the unit is 10ms, the factory configuration is 0x0A.
Undefined	0x72	14	Reserved	0x00

**Attention: Users can configure the parameters in the green background of the CFG file as needed, but if you feel uncertain or need to modify the parameters in the white background, never hesitate to contact customer service. We are always willing to offer assistance.**

#### (1) CFG file description

①Naming rule: T5LCFG.CFG

②Meaning: T5LCFG is the identification mark, these 6 characters cannot be modified, .CFG is the suffix indicating the file format.


③Common naming: T5LCFG landscape.CFG; T5LCFG vertical.CFG; T5LCFG\_800480.CFG is the correct naming. T5L.CFG is the wrong naming.

④Rationale: 1 word (word) = 2 bytes (byte), 1 byte (byte) = 8 bits (bit). 1 bit bit corresponds to a function, and the function has 2 states: off and on.

⑤Byte configuration:

Function	On	OFF	Such as the result of choosing	Convert binary to hexadecimal
Function 7	1	0	0	0011 1000 binary conversion is 0x38 in hexadecimal, this value is the parameter configuration written to the corresponding address, and the file will take effect after downloading
Function 6	1	0	0	
Function 5	1	0	1	
Function 4	1	0	1	
Function 3	1	0	1	
Function 2	1	0	0	
Function 1	1	0	0	
Function 0	1	0	0	

⑥Software generation: CFG files can be modified manually or generated by software, DGUS software generation is done in the following 7 steps.

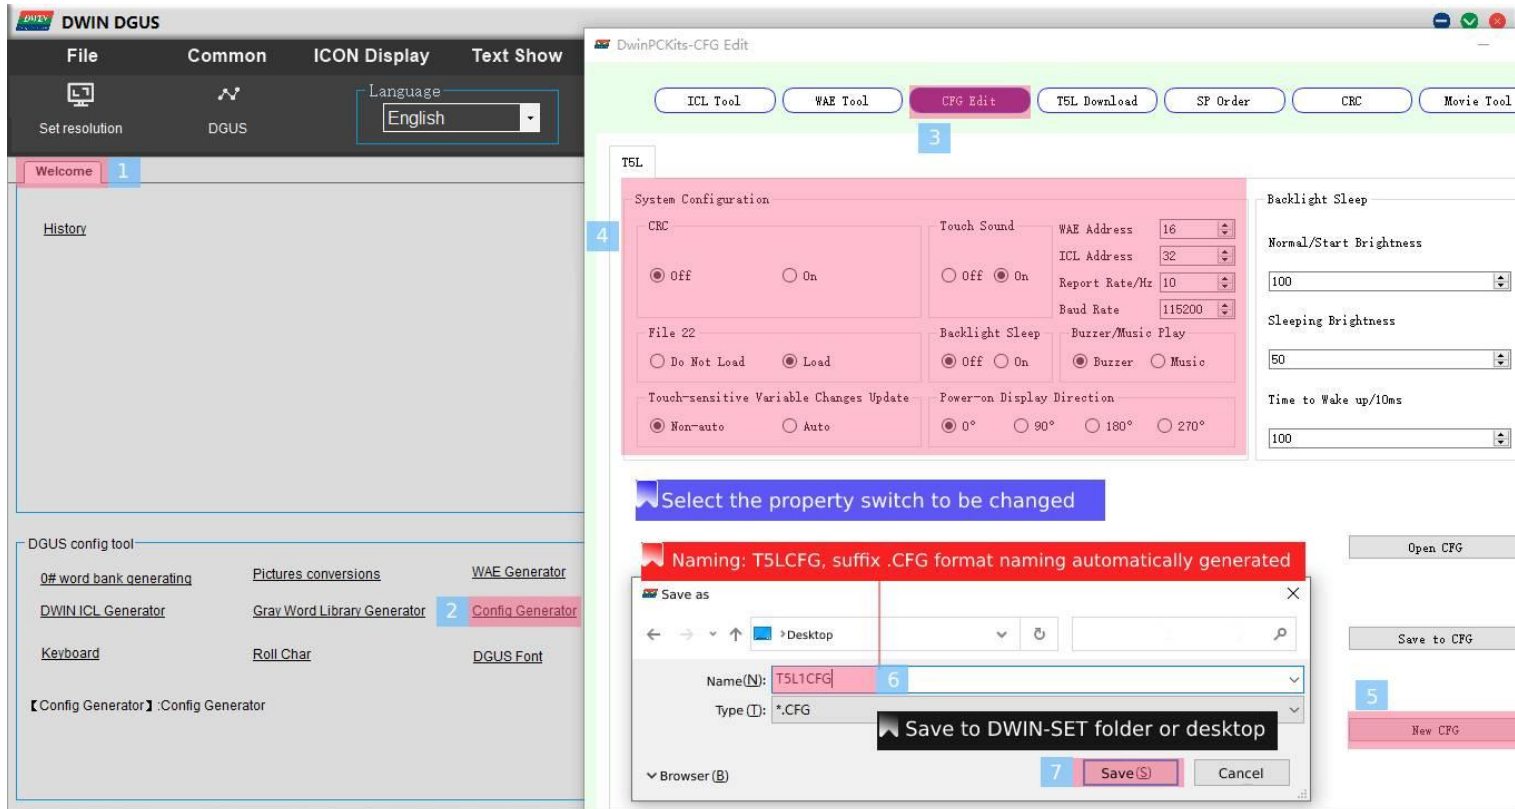

⑦CFG configuration diagram: the first row is the common configuration, the second row is the LCD configuration, the third row is the touch configuration, etc. The first line 0x05 address is the most commonly used address.



7: Serial port CRC check selection 0=off 1=on.  
6: Buzzer/music play selection, 0=buzzer 1=music play  
5: Power on and load 22 files to initialize variable space 1=load 0=do not load  
4: Touch variable to change automatic upload control 0=Do not upload automatically 1=Upload automatically  
3: Touch screen sound control, 0=off 1=on  
2: Touch screen backlight standby control 1=on 0=off  
1-0: Power-on display direction 00=0 01=90 10=180 11=270

The first 5 bytes are fixed

0x07 Music WAE file save location, 0x00-0x3F (00-63)

0x08 Background image ICL file save location, 0x10-0x3F (16-63)

0x09 Touch screen reporting rate setting, range 0x01-0xFF, factory default 0x28

Serial port baud rate setting, setting value=3225600/set baud rate

Backlight standby setting: 0x05 with 0x39; 0x0C: lighting brightness; 0x0D: Standby brightness; 0x0E 0x0F: Standby duration

T5LCFG\_tm041\_CTP.CFG\*

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00000000h:	54	35	4C	43	31	38	00	10	20	28	00	1C	64	32	03	E8
00000010h:	5A	A5	00	03	70	B4	02	00	B4	02	14	02	00	DC	0A	00
00000020h:	5A	20	06	00	00	00	FE	5A	6E	0B	B8	00	F0	0A		

Writing 5A to 0x20 is a switch, indicating that the 0x21/0x22 configuration takes effect, and writing 00 does not take effect.

0x21 Display Mode Configuration

0x22 touch screen sensitivity setting, 0x00 is the lowest, 0x1F is the highest. The factory default value is 0x14, and the sensitivity is high.

0x10-0x1F display mode configuration, the factory has already set the general discordant configuration.


For example, CFG file 0x05 parameter configuration:

① For example: set the initial value at power on, automatic upload of touch data; turn on the touch panel audio, turn off the backlight, and configure the display direction at 0°.

Bit	Parameter	Value	Description
7	CRC check	0	0= close 1=open
6	Buzzer	0	0= buzzer 1= music playback
5	Initial value	1	0= close 1= open
4	Data upload	1	0= close 1= open
3	Sound	1	0= close 1= open
2	Backlight	0	0= close 1= open
1	Display direction	0	00=0° 01=90° 10=180° 11=270°
0		0	

1 byte corresponds to 8 bits, and each bit corresponds to two states: on and off. Write 1 to set the corresponding bit on and 0 to off .

Convert the binary 00111000 to hexadecimal 0x38, write 0x38 to 0x05 address, and download the CFG file to complete the corresponding configuration.

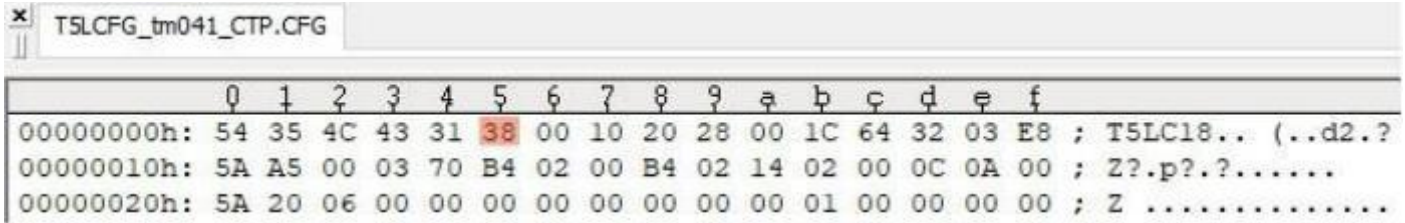

## ② Enable CRC check

CFG file 0x05 address can write 0xB8, 8 bits are configured as 1011 1000, 0x05 position. 7 bits are written 1.

Take reading the version number as an example:


No check Tx (send): 5A A5 04 83 000F 01

Add check Tx (send): 5A A5 06 83 000F 01 ED90

Meaning: 0x5A A5 06: The frame header and data length do not need to participate in the verification;

0x83 000F 01: The part of the instruction that needs to participate in the verification;

0xED90: check value, check format CRC-16

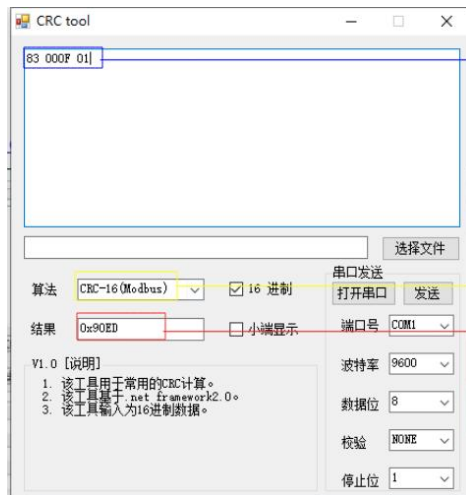

Manual input command,  
82/83 write/read command + data part

Set reference

The high and low bits of some verification tools are reversed.  
Here, when writing instructions, write the verification value  
to 0XED90

It's same for instructions, taking controlling the brightness of the backlight as an example:

No checksum Tx (send): 5A A5 04 82 0082 0A

Add check Tx (send): 5A A5 06 82 0082 0A C8FB

Meaning: 0x5A A5 06: The frame header and data length do not need to participate in the verification;

0x82 0082 0A: The instruction part that needs to participate in the verification; the first 0x82 is the write instruction, and the second 0x0082 is the backlight control address, do not confuse it.

Backlight brightness range 0x00-0x64.

0xC8FB: check value, check format CRC-16.


Setting value of DMG85480C050-03W (Vertical screen at factory) in CFG file at different display direction.

Mode	Image Resolution	ICL	Configuration Value
0° lateral	854*480	ICL file made by 854*480 image	0x38
90° vertical	480*854	ICL file made by 480*854 images	0x39
180° lateral	850*480	ICL file made by 854*480 images	0x3A
270° vertical	480*854	ICL file made by 480*854 images	0x3B

## (2) CFG 0x0C backlight screensaver configuration


CFG Address	Description	Configuration Value
0x05	Turn on backlight	0x3C
0x0C	Brightness value	Range: 0x00-0x64
0x0D	Standby brightness value	Range: 0x00-0x64
0x0E 0x0F	Backlight delay	Range: 0x0001-0xFFFF, unit 10 ms.

After the backlight standby screen protection is turned on, the first touch on the touch panel will wake up the backlight, and the second touch will trigger the touch control.

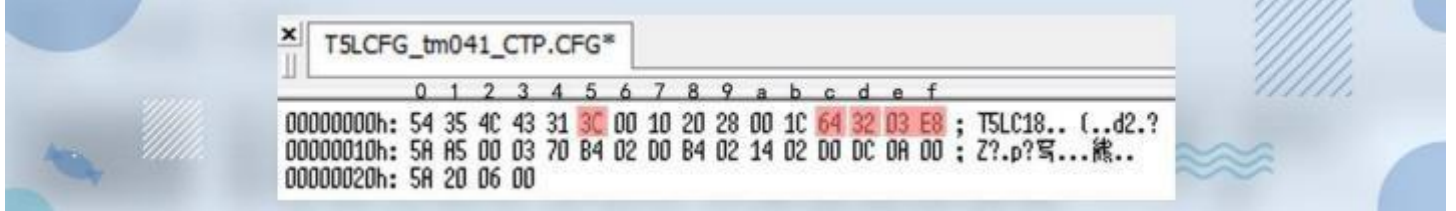

### (3) Background image location

If the background image file is set to 32. ICL, 0x20 needs to be written at CFG 0x08.

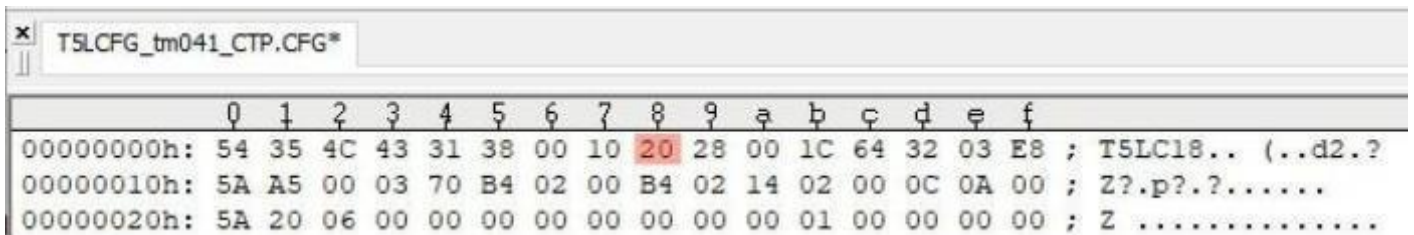


### (4) Baud Rate

Baud rate setting value=3225600/baud rate. The maximum value is 0x03FF.

E.g. factory default=115200, baud rate setting value=3225600/ 115200=28=0x1C.

Because the baud rate accounts for 0x0A 0x0B 2 bytes, CFG file 0x0A address should be started as 0x001C.

Accordingly, for 9600 baud rate, the settings value is 0x0150.

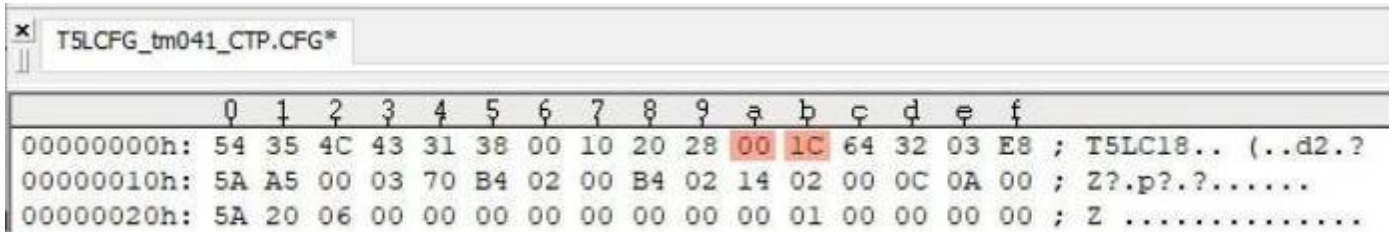

### (5) Display

Display configuration mode and touch configuration mode have been configured at factory. In case of reverse touch/ page sliding or white screen or screen flicker during configuration, you can try to download the factory CFG file.

Write 0x5A at 0x10, 0x11. A5 indicates that 0x12-0x1F parameters will take effect, and 0x00 indicate that they will not take effect.



T5LCFG_tm041_CTP.CFG*																
	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00000000h:	54	35	4C	43	31	38	00	10	20	28	00	1C	64	32	03	E8 ; T5LC18.. (...d2.?
00000010h:	5A	A5	00	03	70	B4	02	00	B4	02	14	02	00	0C	0A	00 ; Z?.p?.?.....
00000020h:	5A	20	06	00	00	00	00	00	00	00	00	01	00	00	00	00 ; Z .....

0x12-0x1F of CFG file

#### (6) CTP Sensitivity Setting

Only for capacitive screens to increase the sensitivity of the PMMA or tempered glass modification, 0x20 write 0x5A, that the configuration of the 0x22 position takes effect, 0x22 with the sensitivity value, the factory default is 0x14, the range 0x0000-0x1F, generally the greater the thickness of the PMMA or tempered glass, the corresponding modified value is also greater.

T5LCFG_tm041_CTP.CFG*																
	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00000000h:	54	35	4C	43	31	38	00	10	20	28	00	1C	64	32	03	E8 ; T5LC18.. (...d2.?
00000010h:	5A	A5	00	03	70	B4	02	00	B4	02	14	02	00	0C	0A	00 ; Z?.p?.?.....
00000020h:	5A	20	06	00	00	00	FE	5A	6E	0B	B8	00	F0	0A	00	00 ; Z .... 0x5A n.??..

#### (7) RTP Sensitivity Setting

The RTP sensitivity setting needs to be upgraded to V60 and above, and the touch screen needs to be calibrated once. If it has been upgraded, this step can be skipped.

Minimal sensitivity: 0x20 writes 0x5A, 0x21 writes 0x00, 0x22 writes 0x10; the touch feels relatively dull and a little scratchy.

Maximum sensitivity: 0x20 writes 0x5A, 0x21 writes 0x00, 0x22 writes 0xFF; the feeling of touch is relatively fast and gravity-free.

The feeling is only noticeable when using sliding controls to make touch control more obvious, such as dragging adjustment, sliding adjustment, sliding gesture to turn the page. The effect of button controls such as basic touch is not obvious.

The factory value is 0x40, which is the recommended default setting, but can also be set according to actual needs.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f
00000000h:	54	35	4C	43	31	38	00	00	20	28	00	08	64	64	FF	FF ; T5LC18.. (...dd
00000010h:	00	00	01	16	29	02	01	E0	02	0A	02	01	10	02	00	00 ; ..... )..?.....
00000020h:	5A	00	40	00	00	00	00	00	00	00	00	00	00	00	00	00 ; Z.@.....

## (8) Buzzer

Buzzer can be configured in the CFG file to adjust and modify the buzzer sound volume and duration.

0x2B in the CFG file determines the sound volume of the buzzer. A larger duty cycle means a louder sound.

0x2D in the CFG file determines touch button buzzer time, unit: 10mS. Factory default is 0x0A.

After configuration, the key accompaniment sound of the touch screen and the buzzer sound controlled by the system variable interface buzzer serial port command will change accordingly.

Attachment: Description of system variable interface 0xA0:

On-chip Flash saves WAE music playback settings:

D7: The segment ID of this playback, 0x00-0xFF; the location of the WAE file is specified by the CFG configuration file or D2:D1.

D6: The number of playing segments this time, fixed at 0x01, and cleared to zero after DGUS processing; in buzzer mode, it is the beeping time, and the unit is 8ms.

D5: playback volume, the unit is 1/64; the initial value after power-on is 0x40(100%).

D4: Play status feedback, 0x00=stop, 0x01=pause, 0x02=playing.

D3: 0x5A indicates that the WAE file is specified by D2:D1, otherwise it is specified by the CFG configuration file.

D2:D1: WAE file location, only valid when D3=0x5A.

D0: Undefined, write 0x00.

Command example:

5A A5 05 82 00A0 007D; The buzzer sounds for 1 second, 1000ms/8ms=125=007Dh.

5A A5 05 82 00A0 003E; The buzzer sounds for 0.5 seconds, 500ms/8ms=62.5=003Eh.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
00000000h:	54	35	4C	43	31	38	00	10	20	28	00	1C	64	32	03	E8	; T5LC18.. (...d2.?
00000010h:	5A	A5	00	03	70	B4	02	00	B4	02	14	02	00	0C	0A	00	; Z?.p?.?.....
00000020h:	5A	20	06	00	00	00	FE	5A	6E	0B	B9	00	F0	0A	00	00	; Z .... 唢n.??..

## (9) Power on Initialization variable file ID

0x5A at CFG 0x2E indicates that the function is enabled.

0x2F at CFG 0x0F indicates that the ID of the initialization file is 15, instead of 22.

This feature is useful when you need to make full use of the font space.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
00000000h:	54	35	4C	43	31	38	00	10	20	28	00	1C	64	32	03	E8	; T5LC18.. (...d2.?
00000010h:	5A	A5	00	03	70	B4	02	00	B4	02	14	02	00	0C	0A	00	; Z?.p?写...總..
00000020h:	5A	20	06	00	00	00	00	00	00	00	00	00	00	00	5A	0F	


## (10) SD download folder name

0x5AA5 at CFG 0x40 and 0x41 enables file name rewriting.

0x08 at CFG 0x42 indicates that the folder ID overwritten is 8 bytes in length and ranges from 0x01 to 0x08.

0x4A at CFG 0x43 indicates the overwritten folder new name, such as RGZN\_SET.

After the configuration file is downloaded, it takes effect after re-power.

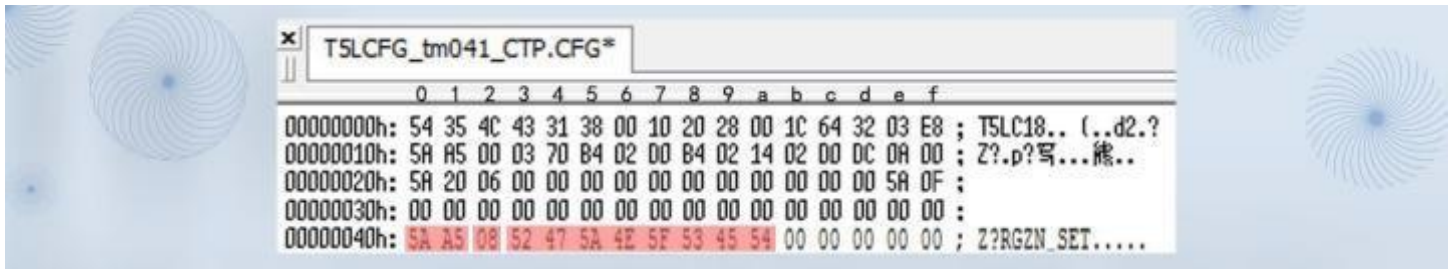

#### (11) T5L DGUSII touch screen calibration

T5L screen with RTP are designed with automatic error identification and dynamic calibration algorithm, which can solve the problem of touch offset.

When products are in a strong interference environment, touch drift may occur occasionally. In this case, you can use the following methods to restore the touch screen to normal functions.

The product calibration methods of T5L TA and DGUS are the same. During the switch between TA instruction set development mode and DGUS development mode, touch drift may occur occasionally. At this time, it can also be calibrated as follows .

TP configuration	0x1F		Reserved	Write 0x00
	0x20		TP_Set_En	0x5A= Enable the configuration. It has been configured at the factory. Users do not need to configure it again
	0x21	1	TP_Mode	<p>Touch panel mode configuration</p> <p>. 7-4(high 4bit). Select touch panel type:</p> <p>0x0*= 4- wire resistive touch panel</p> <p>0x1*= GT911, GT9271 or GT9110 Driver IC capacitive touch panel</p> <p>0x2*= ILI9881H Incell CTP</p> <p>0x3*= ILI driver IC capacitive touch panel such as ILI2117</p> <p>0x4*= ILI driver IC capacitive touch panel such as ILI2130</p> <p>0x5*= Betterlife driver IC capacitive touch panel such as BL8825</p> <p>0x6 *= Sili micro driver IC capacitive touch screen such as GSL1680.</p> <p>0x7*= Hynitron driver IC capacitive touch screen such as CST340</p> <p>0x8*= ILI driver IC capacitive touch screen such as ILI231*/251*</p> <p>0xF*= 5- wire resistive touch panel</p> <p>. 3 Resistive touch panel calibration: 0= off; 1= on, enabled for SD card downloading</p> <p>.2-.0 ( low 3bit) Touch panel setting: (Only CTP works)</p> <p>.2 X coordinate selection: 0= from 0 to Xmax; 1= from Xmax to 0;</p> <p>.1 Y coordinate selection: 0= from 0 to Ymax; 1=from Ymax to 0;</p> <p>.0 X, Y exchange: 0=XY; 1=YX</p>

Taking the DMG48320C035\_03WTR four-wire resistive screen as an example, the first upgrade of the V60 and above kernel version calibration, the steps are as follows, the V45-V55 version does not upgrade the calibration and skip the first step:

①Download the V60 kernel program first——and then download the .INI file (the screen will be black if you don't download this file for V60 and above, just download it once), and skip this step if you have upgraded V60.

② CFG file 0x21 writes 0x08.

4-wire resistive touch panel	Calibration	0x21 write 0x08
	Non calibration	0x21 write 0x00
5-wire resistive touch panel	Calibration	0x21 write 0xF8
	Non calibration	0x21 write 0xF0

0x08 meaning: the upper touch screen configuration table .7-4 (high 4bit) indicates the touch screen type, DMG48320C035\_03WTR is a 4-wire resistive screen, so the high 4bit corresponds to choose to write 0. In the same way, if the 5-wire resistive screen is 4 bits high, choose to write F. Writing 1 to bit3 in the lower 4 bits means turning on resistive screen touch calibration, and bit2/bit1/bit0 are only valid for capacitive screens, that is, writing 0/1 is OK, and the lower 4 bits of 4 bits binary 1000 is converted to hexadecimal 8. Therefore, writing 0x08 at address 0x21 is the standard value, and it is also possible to write a value within the range of 0x08-0x0F at the same time, as long as bit3 writes 1.

You can write 0x00-0x07 without calibration, the default is 0x00, as long as bit3 writes 0 lines.

If you want to calibrate 0x21 for 5-wire resistive screen, you can write 0xF8-0xFF, and you can not calibrate 0xF0-0xF7.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
00000000h:	54	35	4C	43	31	38	00	00	20	28	00	08	64	64	FF	FF	; T5LC18.. (.dd
00000010h:	00	00	01	16	29	02	01	E0	02	0A	02	01	10	02	00	00	; ....)?.....
00000020h:	5A	08	10	00	00	00	00	00	00	00	00	00	00	00	00	00	; Z.....Z.

③Download the configuration file, 5-point calibration on the screen.

Use the tip of the pen to apply a little pressure in turn (resistive touch screen pressure sensing, to ensure effective operation of the operating contacts), click the center of the "ten" cursor on the touch screen in turn, the order is "upper left corner, upper right corner, lower right corner, lower left corner, and middle". After power on, the calibration is complete.

## (12) 0x21 capacitive touch screen configuration mode modification

Capacitive touch screens have no calibration, only touch mode configuration. Misconfiguration can result in no touch or inaccurate touch.

According to the touch screen configuration table above, there are many different types of capacitive touch screens, that is, the configuration parameters of different types of screens are different. If you download the configuration file by mistake and cause no touch or reverse touch, you can download the corresponding model configuration file from the link below to update.

Take the DMG48480C040\_03WTC capacitive screen as an example, writing 0x16 at address 0x21 will result in invalid touch reverse (download a wrong one), find the factory configuration file of the corresponding model and write 0x10 at position 0x21 to update (download a correct one). At the same time, the type of touch screen used can be known according to the high 4bit value.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
00000000h:	54	35	4C	43	31	28	00	00	20	28	00	1C	64	00	00	00	; T5LC1(.. (.d...
00000010h:	5A	A5	00	0E	08	08	01	E0	08	02	0C	01	E0	06	08	00	; Z?....?....?
00000020h:	5A	10	14	00	00	00	00	00	00	00	00	00	00	00	5A	16	; Z.....Z.

## (13)0x71 Power-on backlight delay lighting configuration

Power-on backlight delay lighting configuration	0x70	1	Configuration enable	0x5A Start a power-on backlight delay lighting time configuration
	0x71	1	Delay enabled	Power-on backlight delay start time, the unit is 10ms, the factory configuration is 0x0A

0x70 write 0x5A to enable the function,



Delay 0.1s to light up the LCD screen: 0x71 factory setting 0x0A, 0x0A=10, 10x10ms=100ms=0.1s; **recommended factory default value 0.1s.**

Delay 2.55s to light up the LCD screen: 0x71 is set to 0xFF, 0xFF=255, 255x10ms=2550ms=2.55s, 0x71 only occupies 1 byte, and the delay range is 0x00-0xFF.

	0	1	2	3	4	5	6	7	8	9	a	b	c	d	e	f	
00000000h:	54	35	4C	43	31	28	00	10	20	28	00	1C	64	32	00	64	; T5LC1(..(..d2.d
00000010h:	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; .....
00000020h:	00	00	14	00	00	00	FE	00	6E	0B	B8	00	F0	0A	00	00	; .....?n.??..
00000030h:	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; .....
00000040h:	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; .....
00000050h:	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; .....
00000060h:	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; .....
00000070h:	5A	FF	00	00	00	00	00	00	00	00	00	00	00	00	00	00	; Z .....

#### (14)Display configuration reference

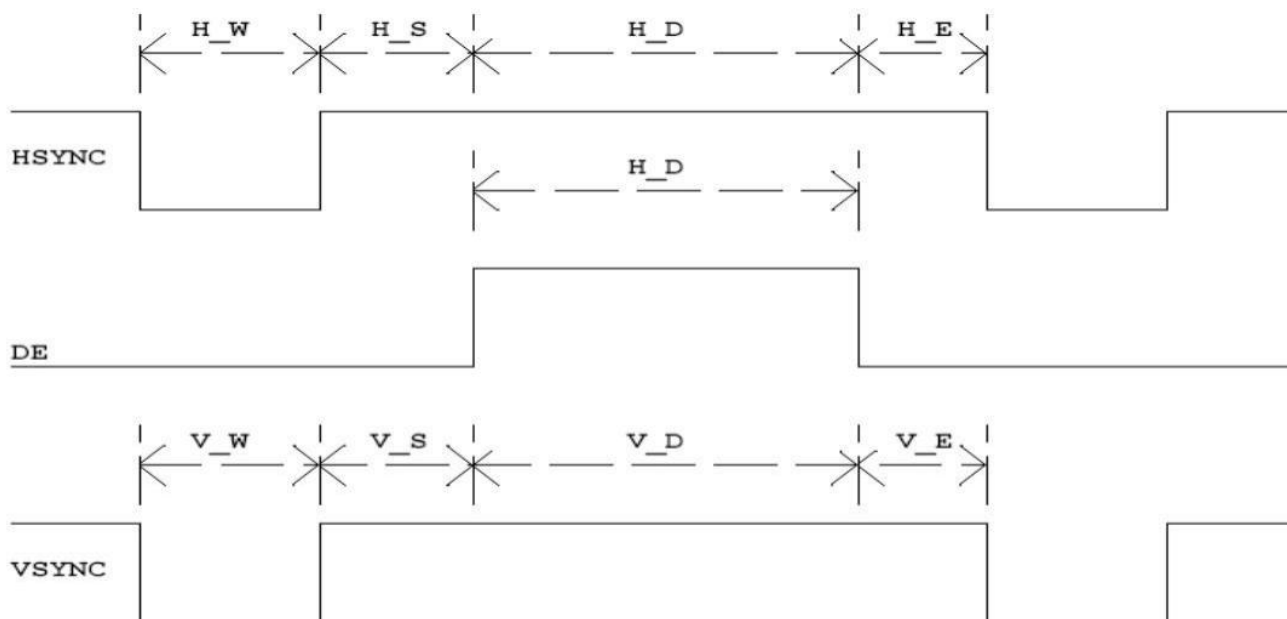


Table 3. 4 reference list of display configuration

Size/ Resolution	Display Screen Configuration Value (HEX Format)													
	0x12	0x13	0x14	0x15	0x16	0x17	0x18	0x19	0x1A	0x1B	0x1C	0x1D	0x1E	0x1F
	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS	PHS
2.0_240*320IPS	01	26	0A	14	00	F0	0A	02	02	01	40	02	11	00
2.4_240*320IPS	01	26	0A	14	00	F0	0A	02	02	01	40	02	0D	00
2.4_320*240	01	26	0A	14	00	F0	0A	02	02	01	40	02	05	00
2.8_240*320 (ST7789)	01	26	0A	14	00	F0	0A	02	02	01	40	02	03	00
2.8_240*320B	01	26	0A	14	00	F0	0A	02	02	01	40	02	01	00
3.5_320*240	01	26	0A	14	00	F0	0A	02	02	01	40	02	02	00
3.5_320*480	01	14	0A	04	01	40	0A	02	02	01	E0	02	04	00
3.5_480*640 (ST7796S)	01	0A	10	20	01	40	20	02	03	02	80	02	06	00
3.5_320*480 IPS (IL9488)	01	14	0A	04	01	40	20	02	03	02	80	02	13	00
3.5_480*640	01	0A	10	20	01	E0	20	02	03	02	80	02	13	00
3.5_480*800 IPS(ST7701S)	00	08	04	0C	01	E0	08	04	13	03	20	80	17	00
4.0_480*480 IPS(ST7701S)	00	0E	08	08	0E	E0	08	02	0C	01	E0	06	08	00
4.0_480*800 IPS(NT35512)	00	08	08	08	01	E0	08	04	0A	03	20	0A	09	00
4.0_480*800 IPS(ST7701S)	00	08	08	08	01	E0	08	04	0A	03	20	0A	16	00
4.0_720*720 (IPS Incell)	00	03	70	BE	02	D0	B4	02	14	02	D0	DC	0A	00
5.0_720*1280(IPS Incell)	00	03	04	14	02	D0	14	02	12	05	00	C8	08	00
5.0_480*854 IPS (HSD ST7701S)	00	08	08	08	01	E0	08	02	0C	03	56	06	0C	00
5.0_480*854 IPS (BOE ST7701S)	00	06	20	40	0E	10	40	02	06	03	56	08	14	00
4.3_480*800 IPS (9701)	00	08	04	0C	01	E0	08	04	13	03	20	08	0E	00
4.3_480*800 IPS (ST7701S)	00	08	04	0C	01	E0	08	04	13	03	20	0A	15	00
3.0_360*640 IPS	00	0A	20	3C	01	68	20	06	36	02	80	08	0F	00
480*272	01	16	29	02	01	E0	02	0A	02	01	10	02	00	00
640*480	01	08	1E	72	02	58	10	03	20	01	E0	0A	00	00
800*480	01	06	1E	10	03	20	D2	03	14	01	E0	0C	00	00
800*600	01	05	1E	10	03	20	D2	03	14	02	58	0C	00	00
1024*600	01	04	A0	88	04	00	18	06	1D	02	58	03	00	00
1024*768	01	04	10	40	04	00	20	04	08	03	00	04	00	00
1280*720	01	03	10	40	05	00	20	08	20	02	D0	20	00	00
1280*800	01	03	10	1C	05	00	10	08	10	03	20	10	00	00
1366*768	01	03	10	20	05	54	20	06	10	03	00	08	00	00
136*768 eDP	00	03	10	20	05	54	20	06	10	03	00	08	10	00
1024*768 VGA	00	03	88	A0	04	00	18	06	1D	03	00	03	00	00
1280*800 VGA	00	03	80	C8	05	00	48	06	16	03	20	03	00	00



### 3.3.2.6 T5\*.CRC File Format

Category	Address	Length	Definition
File identification	0x0000	4	Fixed to 0x43 0x52 0x43 0x10 .
CRC result	0x0004	4	Specify the check position data, and perform the final result of CRC32 check in sequence.
Reserve	0x0008	7	Write 0x00.
OS core code verification	0x000F	1	0x5A means to perform the CRC check of the OS core code, and the rest means skip the check.
LIB file check	0x0010	2	0x10 = ID of LIB file to be checked; 0x11= Number of files to be checked at the beginning of this ID, 0x00 means the end of LIB file check.
	0x0012	62	The remaining 31 defined positions.
Font file verification	0x0050	2	0x50 = the ID of the font file to be checked; 0x51 = the number of files that need to be checked at the beginning of this ID, 0x00 means the end of the check of the font file. For off-chip NOR Flash, the font size is 256 KB. For off-chip NAND Flash, the font file size is 8 MB; and due to bad blocks, the last file should not be used or verified.
	0x0052	254	The remaining 127 defined positions.
Reserve	0x0150	176	Write 0x00.

The polynomial for CRC32 calculation is  $X^{32}+X^{26}+X^{23}+X^{22}+X^{16}+X^{12}+X^{11}+X^{10}+X^8+X^7+X^5+X^4+X^2+X+1$  .

### 3.3.2.6 CTPCFG\*.CFG capacitive touch screen configuration burning file format


Category	Address	Length	Definition
File recognition	0x0000	4	Fixed as 0x43 0x54 0x50 0x53
CTP IC	0x0004	2	0x0001-GT911/GT9110H
PACK_NUM	0x0006	1	Configure the number of packets, 0x01-0x08
PACK_Delay	0x0007	1	Configure the delay time after 1 packet (then configure the next packet), 0x01-0xFF, the unit is 1ms
Reserved	0x0008	24	Reserved, write 0x00
Configuration package 1 definition	0x0020	2	The number of registers that need to be configured in this package
	0x0022	2	The starting register address configured by this package
	0x0024	476	Register data
Configuration package 2 definition	0x0200	2	The number of registers that need to be configured in this package
	0x0202	2	The starting register address configured by this package
	0x0204	508	Register data
.....			
Configuration package 8 definition	0x0E00	2	The number of registers that need to be configured in this package
	0x0E02	2	The starting register address configured by this package
	0x0E04	508	Register data

### 3.3.3 File Download

Only the folder named as DWIN\_SET can be identified by screens, which should contains all files that need to be downloaded, such as "13TouchFile","14ShowFile", "22\_Config.bin", etc.

When creating a new project, the software will automatically generate a series of files, among which "DWprj.hmi" is the only editing program that the DGUS software can recognize. This file cannot be renamed or deleted.

Since the T5L screen cannot read JPEG pictures directly, it is necessary to make pictures and icons into ICL files. The generation process of download files is as follows .

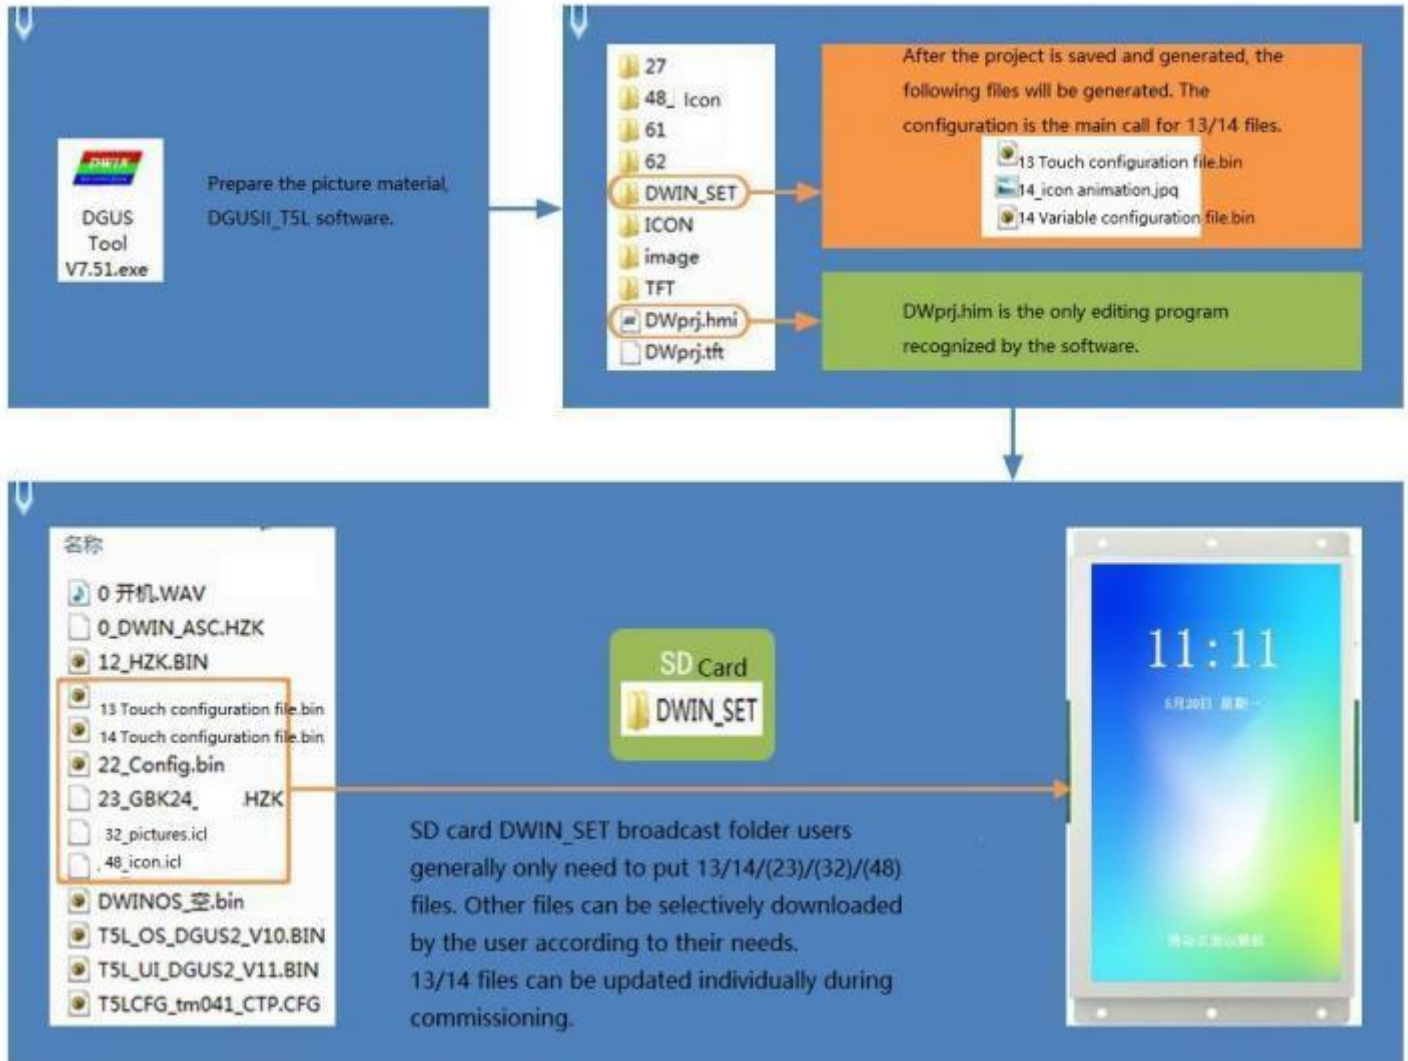

Download files generation diagram

## Chapter 4 Communication Protocol

### 4.1 UART(UART2)

The system debugging UART2 mode is fixed to 8N1, and the baud rate can be set. The data frame consists of 5 data blocks.

Data block	1	2	3	4	5
Definition	Frame Header	Length	Instruction	Data	CRC Check( optional)
Length	2	1	1	Max.249	2
Description	0x5AA5	Including instruction, data and CRC check	0x82 Write 0x83 Read		CRC-16(x16+x15+x2+1)

The CRC check on/off is controlled by bit 0x05.7 of the configuration file.

Instruction	Unable CRC Check	CRC Check
0x83 Read Instruction	Tx: 5AA5 04 83 000F 01	Tx: 5AA5 06 83 000F 01ED 90
0x83 Instruction Response	Rx: 5AA5 06 83 00 0F 01 14 10	Rx: 5AA5 08 83 00 0F 01 14 10 43 F0
0x82 Write Instruction	Tx: 5AA5 05 82 10 00 31 32	Tx: 5AA5 07 82 10 00 31 32 CC 9B
0x82 Instruction Response	Rx: 5AA5 03 82 4F 4B	Rx: 5AA5 05 82 4F 4B A5 EF
0x83 Touch Upload	Rx: 5AA5 06 83 10 01 01 00 5A	Rx: 5AA5 08 83 10 01 01 00 5A 0E 2C

### 4.2 UART2 Debug Interface Instructions

The DGUS screen works in a variable-driven mode, and the working mode of the screen and the state of the GUI are completely controlled by data variables. Therefore, serial port instructions only need to read and write variables, and the instruction set is very simple, users only need to use 82/83 instructions.

Instruction	Data	Description
0x80	Send: Register page (0x00-0x08)+ register address (0x00-0xFF) + data written	Specify the address to start writing the data string to the register.
	Answer: 0x4F 0x4B.	The write instruction is answered.
0x81	Send: Register page (0x00-0x08) + register address (0x00-0xFF) + byte length of the read data(0x01-0xFB)	Start reading data from the specified register.
	Answer: Register page (0x00-0x08) + register address (0x00-0xFF) + data length + data	The data is answered.
<b>Instruction example: 5A A5 04 81 00 0A 04 Read 04 bytes of data from os registers R10~R13 in register page 00.</b> <b>80 81 Instructions are generally not used by users, and are usually used for debugging access to OS functions. You can refer to the register table in the OS application guide. OS Registers Register Page IDs (0x00-0x07) and Interface register page ID (0x08).</b>		
0x82	Send: Variable space first address (0x0000-0xFFFF) + write data	Write data string ( word data) to variable space starting from the specified address. Do not write the space reserved by the system.
	Answer: 0x4F 0x4B.	Write instruction answer.
0x83	Send: Variable space first address (0x0000- 0xFFFF) + byte length of the read data(0x01-0x7D)	Read word data of the specified length from the specified address of the variable space.

	<p>Answer: Variable space first address + byte length of the variable data + the read variable data</p>	The data is answered.
0x84	<p>Send: CH_Mode (Byte) +DATA0 (Word) + ...+DATAn</p> <p>Answer: 0x4F 0x4B</p>	<p>Write curve buffer data. CH_Mode defines the order in which the channels of subsequent data are arranged.</p> <p>Each bit ( bit) of CH_Mode corresponds to 1 channel. CH_Mode.0 corresponds to channel 0, .7 to channel 7. The corresponding position 1 indicates the presence of the corresponding channel data. The corresponding position 0 indicates that the corresponding channel data does not exist.</p> <p>The low channel data comes first. For example, CH_Mode=0x83 (10000011B) means that the subsequent data (channel 0 + channel 1 + channel 7) + ... + ( channel 0+channel 1+ channel 7). ( channel 0 + channel 1 + channel 7 ) . The curve buffer is defined in the 0x1000 - 0x4FFF variable storage space, 2K Words per curve.</p>
0x86	<p>Send: Variable space double word first address (0x000000-0x00FFFF) + data written</p> <p>Answer: 0x4F 0x4B</p>	<p>Write data to the variable space from the specified double word address. The accessible variable space is 256 Kbytes . Do not write the system reserved space.</p>
0x87	<p>Send: Variable space double word first address (0x000000-0x00FFFF)+read data double word length</p> <p>Answer: Variable space double word first address+ variable data double- word length+ the read variable data</p>	<p>Read specified length double- word data from the variable space specified double word address. The accessible variable space is 256 Kbytes.</p> <p>The data is answered.</p>

**Note: DGUS II has replaced common hardware-related operating registers with system variable address interface access instructions. The space reserved by the system does not need to be accessed.**

The register pages are defined as follows.

Register Page ID	Definition	Description
0x00-0x07	Data register	256 per group, R0-R255
0x08	Interface register	DR0 -DR255. For details, please refer to <b>"DWIN OS Development Guide based on T5 " 3.4 Interface register definition description.</b>

T5L supports ED4 USB downloader to communicate with DGUS screen through SD card interface. The virtual serial port mode of the downloader to communicate on the PC side is 8N1, and the baud rate is fixed at 8Mbps. When the PC-side software is processing, it must receive the ED4 response before sending a new data frame. Each data frame can read and write up to 128KB of data.

#### 4.2.1 Write variable memory instruction instruction (0x82)

Here, take writing the value 2 to the variable address of 1000 as an example:

**5A A5 05 82 1000 0002**

**5A A5** means: frame header

**05** means: data length

**82** means: write variable memory instruction

**1000** means: variable address (two bytes)

**0002** means: data 2 (two bytes)

Explanation: assign a value of 2 to address 0000 through the command, and the display on the screen shows that the data variable is of integer type 2.

Note: The address of the DGUS screen **reading and writing** variables can be regarded as the starting address: for example, the effect of the following a and b commands is equal to c.

a: 5AA5 05 82 1001 000A

b: 5AA5 05 82 1002 000B

c: 5AA5 07 82 1001 000A 000B

#### 4.2.2 Read variable memory command command (0x83)

Here is an example of reading the value in the variable address of 1000 (assuming the current value is 2):

**5A A5 04 83 1000 01**

**5A A5** means: frame header

**04** means: data length

**83** means: read data storage area command

**1000** means: variable address (two bytes)

**01** means: read 1 word length from address 1000, the maximum allowable length of data instruction is 0x7C

After reading, the screen will return a read response to the serial port:

**5A A5 06 83 1000 01 0002**

**5A A5** means: frame header

**06** means: data length

**83** means: read variable memory instruction instruction

**1000** means: variable address (two bytes)

**01** means: read 1 word length data from address 1000

**00 02** means: the data value in address 1000 is 2

#### 4.2.3 Touch the key to return to the serial port data (0x83)

Here, take the return variable address 0x1001 and key value 0x0002 as an example:

**5A A5 06 83 1001 01 0002**

**5A A5** means: frame header

**06** means: data length

**83** means: read variable memory instruction instruction

**1001** means: variable address (two bytes)

**01** means: 1 word length data

**00 02** means: key value 0002

Button return (non-basic touch) can be sent through the serial port after the system configuration CFG file configures data upload.

Upload protocol format: (key return address 1001 key value 000A) 5A A5 06 83 1001 01 000A

After pressing the return button, the value screen in this address will not be automatically cleared.

For RS485 half-duplex communication, you can use the 5A A5 04 83 10 01 01 read command to read the key value, and the response format of the read command is consistent with the touch upload format.

RS485 adopts half-duplex communication mode, so do not receive data and send data at the same time.

#### 4.2.4 Virtual UART

(ED4 USB downloader, communicating with DGUS screen via SD card interface)

The PC side ED4 USB downloader communication mode is 8N1, with a fixed baud rate of 8 Mbps, and each data frame consists of 4 data blocks.

Interface table:

Data block	1	2	3	4
Definition	Frame Header	Length	instruction	Data
Length	2	3	1	N
Description	0x5AA5	Including instruction and, data	0x82/0x83	
Sample(no parity)	5A A5	00 00 05	83	00100004

Instruction	Data	Description
0x82	Send: Variable space first address (0x0000- 0xFFFF) + written data	Write data string (word data) to variable space starting from the specified address. Do not write the space reserved by the system.
	Answer: 0x4F 0x4B.	Write instruction answer.
0x83	Send: Variable space first address (0x0000-0xFFFF) + byte length of the read data(0x01-0x7D)	Read word data of the specified length from the specified address of the variable space.
	Answer: Variable space first address + byte length of the variable data + the read variable data	The data is answered.

The PC software must receive an ED4 response before sending a new data frame, and each data frame can read and write up to 128 KB of data.



## Chapter 5 System Variable Interface

### 5.1 System Variable Interface

System variable address range: 0x0000-0x0FFF.

VP	Definition	R/W	Length (word)	Description
0x00	Reserved		4	Undefined
0x04	System_Reset	W	2	<p>Write 0x55AA 5AA5 to reset the T5L CPU once.</p> <p>E.g . 5A A5 07 82 00 04 55 AA 5A A5</p> <p>Reset T5L, clear all data, that is equivalent to power off.</p>
0x06	OS_Update_CMD	W	2	<p>D3 : write 0x5A to enable DWIN OS program once (write into on-chip Nor Flash). clear after CPU operation.</p> <p>D2: File type</p> <p>0x10: must be DWIN OS program from 0x1000, update 28KB at every time.</p> <p>0xA5: 8051 code, update 64KB at every time.</p> <p>D1: 0 : Start address of SRAM to save/ update program to. It must be even.</p> <p>E.g. This instruction is used for downloading and updating the user OS program. " DWIN OS Builder" PC software has integrated the function of downloading the OS. bin file into the screen through UART 2 after compilation.</p>
0x08	NOR_FLASH_RW_CMD	W	4	<p>D7: Operating mode: 0x5A=read 0xA5=write. Clear after operation.</p> <p>D6:4: head address of Nor Flash. It must be even. 0x000000-0x03:FFFE, 256 KWords.</p> <p>D3:2: head address of data variable space. It must be even.</p> <p>D1:0: Data length to read/write. Must be even.</p> <p>E.g.</p> <p>( 1) Write the data 0x12345678 to the variable storage space 0x1002: 5A A5 07 82 10 02 12 34 56 78</p> <p>(2) Store 2-word data of variable storage space 0x1002 address into Nor Flash database header address 0x000002:</p> <p>5A A5 0B 82 0008 A500 0002 1002 0002</p> <p>(3) Read data from Nor Flash database 0x00 0002 to variable storage space address 0x2000:</p> <p>5A A5 0B 82 0008 5A00 0002 2000 0002.</p> <p>After reading and storing the database with OS, it is necessary to judge whether the D7 address has been automatically cleared. If the D7 address has not been cleared, no operation will be carried out until it is cleared for other operations. Otherwise, logic disorder will occur.</p> <p>If the serial port is used for instruction reading and storage operation, other instructions can be sent after appropriate delay.</p>

0x0C	UART2 configuration	W	2	<p>D3: Write 0x5A to configure the UART2 baud rate once; change it to 0xA5 after OS core processing.  D2: serial port mode, bit definition.  .7 CRC check, 1=on, 0=off.  .6-.0 Reserved, write 0.  D1:D0: Baud rate configuration value, D1:D0=CPU main frequency/(64*set baud rate).</p> <p>1. Application instructions  Baud rate and frame CRC switches for real-time modification of UART2.</p> <p>2. Instruction example  Configuration value:  206.4384MHz*1000000=206438400Hz  9600 baud rate configuration value: 206438400/(64*9600)=336=0x0150  115200 Baud rate configuration value: 206438400/(64*115200)=28=0x001C</p> <p>(1) The baud rate is modified, and the CRC is not modified (closed)  ①Change the baud rate from 115200 to 9600  Send: 5AA5 07 82 000C 5A00 0150  After the modification, you can send a command to read the version number. If the correct version number is returned, the modification is successful. After the baud rate is modified on the screen,  The baud rate of the sending end also needs to be modified.  Read version number: 5AA5 04 83 000F 01 (0x01 refers to reading the interface address of 0x000F, and returns the address in 0x000F  1 word length version number data stored on the face. )  Return: 5AA5 06 83 000F 01 63 22 (response to the command above, the high byte 0x63 is the GUI version number,  The low byte 0x22 is the DWIN OS software version number, and the program version ID will be updated. The data returned here is for reference only. )</p> <p>②Change the 9600 baud rate above to 115200  Send: 5AA5 07 82 000C 5A00 001C (the above has been modified, the baud rate of the sending end needs to be 9600)  Read version number: 5AA5 04 83 000F 01 (the baud rate of the sending end must be 115200)  Return: 5AA5 06 83 000F 01 63 22</p> <p>(2) The baud rate is not modified, but the CRC is modified  ①Enable CRC: 5AA5 05 82 000C 5A80  Read version number: 5AA5 06 83 000F 01 ED90 (0xED90 is CRC16 check, see section 4.2.4)  Return: 5AA5 08 83 000F 01 63 22 E5D5  ② Close CRC: 5AA5 07 82 000C 5A00 A6BD  Read version number: 5AA5 04 83 000F 01  Return: 5AA5 06 83 000F 01 63 22</p> <p>(3) Baud rate modification + CRC modification  ①Change the baud rate from 115200 to 9600, and enable CRC:  Send: 5AA5 07 82 000C 5A80 0150  Read version number: 5AA5 06 83 000F 01 ED90 (the baud rate of the sending end must be 9600)  Return: 5AA5 08 83 000F 01 63 22 E5D5  ② Change the 9600 baud rate above to 115200, close CRC  Send: 5AA5 09 82 000C 5A00 001C BA18 (the above has been modified, the baud rate of the sending end needs to be 9600)  Read version number: 5AA5 04 83 000F 01 (the baud rate of the sending end must be 115200)  Return: 5AA5 06 83 000F 01 63 22</p> <p>3. Function setting  (1) CRC check  Set the factory baud rate to 115200, CRC is off, and the return value of the above version number is tested under the V63 GUI version and V22 DWIN OS version. After the program is updated, the return version number data is modified, and the check value will also be modified.  (2) Touch settings  It can be set through the pop-up menu, data entry, and key value return. After setting the value, you need to write 0x5A to the high byte of 0x000C to write the address.  When using the key value return to check the high byte, the low byte of the return key value is stored in the high byte address (VP_H) of the VP address.  (3) The set value will not be saved when power off.</p>
------	---------------------	---	---	---

0x0F	Ver	R	1	<p>Application software version. D3=0x00, D2=CTP driver software version, D1 means GUI software version, D0 means DWIN OS software version.</p>
				<p>E.g.</p> <p>Send: 5A A5 04 83 000F 01</p> <p>Return: 5A A5 06 83 000F 01 61 21 (61 is GUI software version, 21 is DWIN OS software version)</p> <p>Send: 5A A5 04 43 000E 02</p> <p>Return: 5A A5 08 83 000E 02 00 41 61 21</p> <p>Application :</p> <p>(1) When using a display terminal, due to the control system, display terminal start time inconsistent (depending on the user' s power supply capacity and electricity rate) , to ensure that the control system of a start sending data display terminal received correctly and carry out the corresponding functions and instructions, so need to confirm whether the display terminal has the normal operation, the user can be identified by this directive;</p> <p>(2) In the process of debugging need to know whether the system version, configuration and so on is correct, you can also send this instruction to read.</p> <p>(3) The transmission and response of this instruction is often used to verify that the communication between the computer serial port and the serial screen is normal.</p>
0x10	RTC	R/W	4	<p>D7=Year (0-0x63) D6=Month(0-0x0C), D5=Day(0-0x1F), D4=Week(0-0x6), D3 =Hour(0-0x17), D2=Minute(0-0x3B), D1=Second(0-0x3B), D0 Undefined. Data format is HEX.</p> <p>Without RTC on hardware, user can write RTC data.</p>
				<p>E.g.</p> <p>Write: 5A A5 0B 82 0010 13 0A 01 00 0B 0C 0D 00</p> <p>Text RTC display 2019-10-01 11:12:13 SUN,</p> <p>The first two digits of the year are automatically identified;</p> <p>The week is displayed in English, and the system will convert automatically.</p> <p>Read: 5A A5 04 83 00 1004</p> <p>Answer: 5A A5 0C 83 00 10 04 13 0A 01 00 0B 0C 0D 00</p>
0x14	PIC_Now	R	1	<p>Display current page ID. Read only.</p>
				<p>E.g.</p> <p>Read: 5A A5 04 83 0014 01</p> <p>Answer: 5A A5 06 83 00 14 01 0007 (0007 is page 07)</p>
0x15	GUI_Status	R	1	<p>GUI status feedback: 0x0000=free, 0x0001=processing 13.bin and 14.bin.</p>
				<p>The operation state feedback is in millisecond unit level, which is generally applied in special cases. The user can judge whether the GUI kernel is occupied by the DWIN - OS program.</p>
0x16	TP_Status		4	<p>D7: 0x5A= touch panel data is updated. Others= touch panel coordinates not updated</p> <p>After reading the data, the user can write ≠ 0x5A as a mark. As long as the user does not touch, the mark will not be updated</p>

				<p><b>D6:</b> touch panel status. 0x00=release, 0x01=first press, 0x02=lift, 0x03=pressing</p> <p><b>D5:</b> D4= X coordinate</p> <p><b>D3:</b> D2= Y coordinate</p> <p><b>D1:</b> D0=0x0000.</p> <p>E.g.</p> <p>Read: 5A A5 04 83 001603</p> <p>Answer: 5A A5 0A 83 00 16 03 5A 02 02 55 00 E5</p> <p>Read the coordinates of the touch</p> <p>Write: 5A A5 05 82 0016 0000 reset touch panel data update mark.</p> <p>Usually, DWIN OS program can be used to deal with the judgment of touch, long press, short press and other operations.</p>
<b>0x1A-0x30</b>	Reserved		23	Undefined
<b>0x31</b>	LED_Now	R	1	<p><b>D1:</b> 0x5A: backlight brightness value, AD0-AD7 instant value is updated.</p> <p><b>D0:</b> current backlight brightness value, 0x00-0x64.</p> <p>E.g.</p> <p>Read: 5A A5 04 83 003101</p> <p>Answer: 5A A5 06 83 00 31 01 5A 64</p>
<b>0x32</b>	AD0-AD7 Instantaneous value	R	8	<p>Instantaneous value of AD0-AD7, 1 word per AD. The resolution is set by CFG file 0x06.2.</p> <p>12bit mode: voltage=AD value*3300/4095mV.</p> <p>16bit mode: voltage=AD value*3300/65520mV.</p>
<b>0x3A-0x79</b>	Reserved		64	Undefined
<b>0x7A</b>	LCD_HOR	R	1	<p>Horizontal resolution of the screen</p> <p>E.g.</p> <p>Read: 5AA5 04 83 007A 01</p> <p>Answer: 5A A5 06 83 00 7A 01 01 E0 (0x01E0 is horizontal resolution)</p>
<b>0x7B</b>	LCD_VER	R	1	<p>Vertical resolution of the screen</p> <p>E.g.</p> <p>Read: 5AA5 04 83 007B 01</p> <p>Answer: 5A A5 06 83 00 7B 01 01 10 (0x0110 is vertical resolution)</p>
<b>0x7C-0x7F</b>	Reserved		4	Undefined
<b>0x80</b>	System_Config	R/W	2	<p><b>D3:</b> 0x5A = enable the parameter configuration once, clear after operation.</p> <p><b>D2:</b> touch panel sensitivity configuration value, read only.</p> <p><b>D1:</b> touch panel mode configuration value, read only.</p> <p><b>D0:</b> system status setting.</p> <p>7: Serial port CRC check 0=off 1=on, read only.</p> <p>6: Reserved, write 0.</p> <p>5: Power on load 22 file to initialize variable space. 1=load 0=unload, read only.</p> <p>4: Variable automatic upload setting 1= on, 0= off, read and write.</p> <p>3: Touch panel audio control 1= on 0= off, read and write.</p> <p>2: Touch panel backlight standby control 1= on 0= off, read and write.</p>

				<p>1. 0: display direction 00 = 0 ° , 01 = 90 ° , 10 =180 ° ,11 = 270 ° , read and write.</p> <p>E.g.</p> <p>Read: 5A A5 04 83 0080 02</p> <p>Answer: 5A A5 08 83 00 80 02 00 14 1038</p> <p>Read instructions are typically used to view the screen .CFG configuration .</p> <p>D0 can change the configuration. CFG file 0 x05 address, for example, the next two instruction are on the corresponding .4 = 1 .5 =1, TP sound control off or on, can be applied to the touch button of the buzzer “ mute” function.</p> <p>Note: write instruction is not saved after power off.</p> <p>Write: 5A A5 07 82 0080 5A 00 00 30</p> <p>Write: 5A A5 07 82 0080 5A 00 00 38</p>
0x82	LED_ Config		2	<p>Set standby backlight.</p> <p>D3 = Turn on brightness, 0x00-0x64; When backlight standby control is off, D3 is the brightness adjustment interface.</p> <p>D2= Turn off brightness, 0x00-0x64; D1:0=open time /10 ms.</p> <p>E.g.</p> <p>1 . When CFG address 0x05 is configured to turn on backlight standby control of touch panel:</p> <p>5A A5 07 82 0082 6432 03E8, 10 seconds after the screen backlight automatically reduced to 0x32 brightness.</p> <p>5A A5 07 82 0082 2020 ****, direct instruction control backlight brightness 0x20 brightness, and backlight screen saver brightness is consistent with standby.</p> <p>Note: the first physical touch on the touch panel after a certain period of time is to wake up the backlight function of the screen saver. Even if the brightness is the same as the setting value of standby brightness, additional first awakening touch and click operation" is still needed after a certain period of time.</p> <p>2 . When CFG address 0x05 is configured with backlight standby control over touch panel:</p> <p>5A A5 05 82 0082 0A**, direct instruction control backlight brightness is 0x0A brightness.</p>
0x84	PIC_Set	R/W	2	<p>D3: 0x5A= enable page operation once, The CPU is cleared after processing.</p> <p>D2: Processing Mode.</p> <p>0x01=page switch ( Display the image specified in the image storage area to the current background page).</p> <p>0x02=This mode is reserved and not supported.</p> <p>Instruction example:</p> <p>5A A5 07 82 0084 5A01 0001, display the 01 serial number picture under the background picture ICL file (if the serial number picture ID of the sent instruction does not exist, the instruction operation judgment will not take effect.)</p>

0x86	PWM0_Set	R/W	2	<p>D3=write 0x5A to enable PWM0 setting once, The CPU is cleared after processing.</p> <p>D2= frequency division coefficient</p> <p>D1:D0= PWM0 precision</p> <p>PWM0 carrier frequency=825.7536 MHz/(frequency division coefficient PWM0 precision).</p>
				<p>E.g.</p> <p>1. Write 0x0086 variable configuration 100 KHz</p> <p>The division factor is set to 1, upper limit value=825.7536MHz/0. 1MHz=8258 (0x2042).</p> <p>Write data 5A 01 20 42 to the variable of 0x0088, output 13 bit resolution, 100 KHz carrier PWM.</p> <p>2. Write 0x0093 variable to control the output duty ratio of PWM0 Write value = high level ratio * upper limit value</p> <p>For example, 10%, write value is 10% * 8258= 826(0x033A)</p>
0x88	PWM1_Set	R/W	2	<p>D3= 0x5A starts a PWM1 setting, and the CPU clears it after processing. D2 = frequency division coefficient D1:D0 = PWM1 precision PWM1 carrier frequency= 825.7536 MHz/(frequency division coefficient* PWM1 precision).</p> <p>1. Write 0x0088 variable to configure 100 KHz.</p> <p>The frequency division coefficient is 1, the upper limit=825.7536MHz/0. 1MHz=8258 (0x2042)</p> <p>So, write data 5A 01 20 42 to 0x0088 variable, output PWM with 13bit resolution and 100 KHz carrier.</p> <p>2. Write the 0x0093 variable to control the output duty cycle of PWM1 as needed.</p> <p>Write value = high level ratio * upper limit value.</p> <p>For example, 10%, write 10%*8258=826 (0x033A).</p>
0x8A-0x91	Reserved		10	Undefined
0x92	PWM0_Out	R/W	1	D1: D0= PWM0 output high level width, 0x0000- PWM0 precision.
0x93	PWM1_Out	R/W	1	D1: D0= PWM1 output high level width, 0x0000- PWM1 precision.
0x94-0x9B	Reserved		9	Undefined



0x9C	RTC_Set	W	4	<p>D7:D6=write 0x5AA5 to enable RTC setting once; D5:D0=year, month, day, hour, minute, second, all in HEX format. Need hardware RTC support.</p> <p>0X9C T5 RTC entry: RTC rewriting occupies 4 addresses in total: 009C, 009D, 009E, and 009F. 009C write 5AA5</p> <p>Start the RTC setting, the high and low bytes of 009D correspond to the year and month, the high and low bytes of 009 E correspond to the date and time, and the high and low bytes of 009F are paired</p> <p>Should be seconds.</p> <p>① The key value is returned, the address is set to 009C, and the key value is set to 5AA5. Press the "Save Settings" button.</p> <p>② Data variable entry, address 009D, variable type set the high byte of variable pointer, make a quantity variable display, Address 009D, variable type set VP high byte; high byte changes year. Data variable entry, address 009D, variable type set variable pointer low byte, make a quantity variable display, ground Address 009D, variable type VP low byte; low byte changes month. The day, hour, minute, second, and repeat are divided into high and low bytes and are copied and arranged in sequence, with a total of 6 input keys and 6 display controls.</p> <p>After a single input operation, click the ① button "Save Settings" 009C button value to change the time.</p>
0xA0	WAE Music_Play_Set	R/W	2	<p>The on-chip Flash saves WAE music playback settings:</p> <p>D7: indicates the segment ID of this playback, 0x00 - 0xFF. The WAE file location is specified by the CFG configuration file or D2:D1.</p> <p>D6: Number of playing segments, fixed at 0x01, cleared after DGUS processing; In buzzer mode, the unit is 8ms.</p> <p>D5: Playback volume, unit:1/64;The initial power-on value is 0x40 ( 100%).</p> <p>D4: Playback status feedback, 0x00=stop, 0x01=pause, 0x02=playback.</p> <p>D3 : Segment ID of this playback, 0x00-0xFF. WAE file location is specified by CFG configuration file.</p> <p>D2: Number of segments, fixed 0x01. Clear after DGUS operation. Under buzzer mode, it is buzz time, unit: 8ms.</p> <p>D1: Volume, unit: 1/64; Initial value is 0x40( 100%).</p> <p>D0: Feedback, 0x00=stop, 0x01=pause, 0x02=playing.</p> <p>Example buzzer control instructions: 5 A A5 05 82 00A0 007D The buzzer beeps for 1 second. WAE music playback setting: 1. WAE file save location setting</p> <p>① Set the save location of the .wae file by modifying the parameters of the 0x07 address of the CFG file.</p> <p>For example: 26.wae corresponds to the 0x07 position of the CFG file, write 0x1A.</p>

				<p>② Configure the parameter modification of the 0x05 address of the CFG file. For example: write 0x7C to the 0x05 position, and the .6 bit enables music playback. (.6: Buzzer/ music play selection, 0= buzzer 1= music play.)</p> <p>③ Instruction format: 5A A5 07 82 00A0 03 01 40 00 Play music with ID 03 in wae file, play segment 1 segment, volume is 100%, D0: feedback is read only, write instruction can write 00 without definition.</p>
0xA4-0xA9	Reserved		8	Undefined
0xAA	External 16 Mbytes FLASH write operation	R/W	6	<p>Update 16Mbytes of external memory content based on 32Kbytes blocks. D11: 0x5A= enable external memory operation, clear after operation. D10: Operation mode D10=0x10, read 16 MB SPI NOR FLASH data D9: font library ID, 0x10-0x1F, 256Kbytes per font library, maximum 4Mbytes D8:D6: the starting address of data in the font library is defined according to the Word, 0x0000-0x0FFFF D5: D4: The first address of the read data variable space, which must be even. D3: D2: The length of the data read, defined according to the Word, must be even. D1:D0: undefined, write 0x00. <b>For D10=0x02 write 32 Kbytes data block into 16 MB SPI NOR FLASH.</b> D9: D8: 32Kbytes memory block address, 0x0000-0x01FF, correspond to 16 Mbytes memory. D7: D6: The first address of the update data stored in the data variable space must be even. D5: D4: After the completion of this operation, the time of delay waiting for the next write operation, unit: 1 ms. DGUS refresh will stop during the delay wait to prevent errors caused by incomplete updates. D3:D0: Undefined, write 0x00. <b>D10=0x03, font copy</b> D9:D8: Source font ID, 0x0000-0x001F, 256Kbytes per font library, max 4 Mbytes. D7:D6: Target font ID, 0x0000-0x003F. D5-D4: Number of font to copy, 0x0000-0x0010. D3:D0: Undefined, write 0x00. <b>D10=0x04, D10=0x04, write multiple 4KB data blocks to NAND FLASH ( NAND Flash must be externally expanded).</b> D9: D6: The starting address of the NAND Flash to be written, the lower 12 bits are 0 (4KB alignment). If the lower 18 bits of the starting address are all 0s, the T5L will first erase the 256 KB block before writing. D5: D4: The write data is stored in the first address of the data variable space, which must be an even number. D3: Number of 4KB blocks written, 0x01-0x10. D2: D0: undefined, write 0x00.</p>

D10=0x05, 32-bit CRC check of NAND Flash data ( NAND Flash must be externally expanded) .

D9: D6: NAND source address, 0x0000:0000-0x1FFF:F000, the lower 12 bits are 0 (4 KB alignment).

D5: D4: The number of 4KB data blocks to be checked, 0x0001-0x8000 , the maximum is 128 Mbytes.

D3: D0: 32- bit CRC check return value, the CRC check polynomial is the same as the SD download CRC check.

D10=0x06 , NAND Flash Copy ( NAND Flash must be externally expanded).

D9:D6: NAND source address, 0x0000:0000-0x1FFF:F000, the lower 12 bits are 0 (4KB alignment).

D5:D4: Target font ID, 0x0000-0x00FF.

0x00-0xBF is SPI NOR Flash, the size of a single font is 256 Kbytes;

0x0C0-0xFF are SPI NAND Flash, and the size of a single font is 8Mbytes.

D3: D2: the number of fonts to be copied.


D1:D0: undefined, write 0x00.

If the copy is accidentally interrupted by power failure, it will automatically continue until it is completed when the power is restarted.

#### Example 1: 0xAA 02 mode serial port update 32.ICL file

Based on the standard 16MB Flash, update 32.ICL with a size of 4.17KB and the first address of the data variable space (RAM) 0x8000

1. Based on the 32Kbytes data block, calculate the start position of the ICL data packet.



The 16MB memory can be divided into 64 256KB memories, that is, the range of 0-63 (32.ICL is divided according to this); it can also be divided into 512 32KB memories.

One 16MB Flash block:  $16 \times 1024 / 32 = 512$  (unit conversion, 1MB=1024KB), that is, the range is: 0x0000-0x01FF (0-511);

Four 16MB Flash blocks:  $16 \times 4 \times 1024 / 32 = 2048$ , that is, the range is: 0x0000-0x07FF (0-2047).

Update 32.ICL to calculate the start ID according to the 32KB data block sent:  $32 \times 256 / 32 = 256 = 0x0100$ , that is, the first data packet of 32.ICL is placed at 0x0100.

2. Write the 32.ICL data into the first address of the variable space (RAM) 0x8000 for temporary storage.

One 32KB occupied RAM address calculation:  $32 \times 1024 / 2 = 16384$  (word)=0x4000 (word); (1kB=1024bytes, 2bytes=1 word, conversion between decimal and hexadecimal).

$0x8000 + 0x4000 = 0xC000$ ; (RAM range is 0x0000-0xFFFF)

The above is a 32KB data block occupying the address range of 0x8000-0xC000 (the temporary storage address should not be used for other purposes, otherwise the data will be modified).

Since an instruction does not exceed 255 bytes at most, and the data part does not exceed 249 bytes, 240 bytes is used as the length of the data part (easy to calculate).

The 32KB data packet is divided into N instructions:  $32 \times 1024 / 240 = 136.5$  (32KB data conversion, a total of 137 instructions)

The 4.17KB data packet is divided into N instructions:  $4.17 \times 1024 / 240 = 17.8$  (4.17KB data conversion, a total of 18 instructions)

Interval address calculation for each instruction:  $240 / 2 = 120 = 0x78$

(1 variable address=2 bytes, add 0x78 to the start address of each instruction)

3. The starting address of 18 instructions in a 17KB packet is as follows:

0x8000 0x8078

0x80F0 0x8168

0x81E0 0x8258

0x82D0 0x8348

0x83C0 0x8438


0x84B0 0x8528

0x85A0 0x8618

0x8690 0x8708

0x8780 0x87F8

Attached picture 32. The ICL command is as follows (choose a solid color image, the amount of data will be small, and the same part of the data can be copied):



#### Article 1

0000h-00efh (240 bytes, 240=00f0h, next address starts at 00f0h, 15 lines of data in UE):

```
5A A5 F3 82 80 00 44 47 55 53 5F 33 FB 29 00 00 10 A8 04 00 00 00 00 00
00 14 01 E0 01 E0 02 72 00 00 0E 20 FF D8 FF E0 00 10 4A 46 49 46 00
01 01 01 00 60 00 60 00 00 FF DB 00 43 00 03 02 02 03 02 02 03 03 03
04 03 03 04 05 08 05 05 04 04 05 0A 07 07 06 08 0C 0A 0C 0C 0B 0A 0B
0B 0D 0E 12 10 0D 0E 11 0E 0B 0B 10 16 10 11 13 14 15 15 15 0C 0F 17
18 16 14 18 12 14 15 14 FF DB 00 43 01 03 04 04 05 04 05 09 05 05 09 14
0D 0B 0D 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14
14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14 14
14 14 14 14 14 FF C0 00 11 08 01 E0 01 E0 03 01 22 00 02 11 01 03 11 01
FF C4 00 1F 00 00 01 05 01 01 01 01 01 01 00 00 00 00 00 00 00 00 01 02
03 04 05 06 07 08 09 0A 0B
```

#### Article 2

00f0h-01dfh (240\*2=480 bytes, 480=01e0h, the next address starts from 01e0h):

5A A5 F3 82 80 78 FF C4 00 B5 10 00 02 01 03 03 02 04 03 05 05 04 04 00  
00 01 7D 01 02 03 00 04 11 05 12 21 31 41 06 13 51 61 07 22 71 14 32 81  
91 A1 08 23 42 B1 C1 15 52 D1 F0 24 33 62 72 82 09 0A 16 17 18 19 1A  
25 26 27 28 29 2A 34 35 36 37 38 39 3A 43 44 45 46 47 48 49 4A 53 54 55  
56 57 58 59 5A 63 64 65 66 67 68 69 6A 73 74 75 76 77 78 79 7A 83 84 85  
86 87 88 89 8A 92 93 94 95 96 97 98 99 9A A2 A3 A4 A5 A6 A7 A8 A9 AA  
B2 B3 B4 B5 B6 B7 B8 B9 BA C2 C3 C4 C5 C6 C7 C8 C9 CA D2 D3 D4 D5  
D6 D7 D8 D9 DA E1 E2 E3 E4 E5 E6 E7 E8 E9 EA F1 F2 F3 F4 F5 F6 F7  
F8 F9 FA FF C4 00 1F 01 00 03 01 01 01 01 01 01 01 01 00 00 00 00 00  
00 01 02 03 04 05 06 07 08 09 0A 0B FF C4 00 B5 11 00 02 01 02 04 04 03  
04 07 05 04 04 00 01 02 77 00 01 02

#### Article 3

01e0h-02cfh (240\*3=720 bytes, 720=02d0h, next address starts at 02d0h):

5A A5 F3 82 80 F0 03 11 04 05 21 31 06 12 41 51 07 61 71 13 22 32 81 08  
14 42 91 A1 B1 C1 09 23 33 52 F0 15 62 72 D1 0A 16 24 34 E1 25 F1 17  
18 19 1A 26 27 28 29 2A 35 36 37 38 39 3A 43 44 45 46 47 48 49 4A 53 54  
55 56 57 58 59 5A 63 64 65 66 67 68 69 6A 73 74 75 76 77 78 79 7A 82 83  
84 85 86 87 88 89 8A 92 93 94 95 96 97 98 99 9A A2 A3 A4 A5 A6 A7 A8  
A9 AA B2 B3 B4 B5 B6 B7 B8 B9 BA C2 C3 C4 C5 C6 C7 C8 C9 CA D2 D3  
D4 D5 D6 D7 D8 D9 DA E2 E3 E4 E5 E6 E7 E8 E9 EA F2 F3 F4 F5 F6 F7  
F8 F9 FA FF DA 00 0F 03 01 00 02 11 03 11 00 3F 00 00 00 00 B1 45 14  
57 F5 D9 F8 50 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14  
00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14  
00 51 45 14 00 51 45 14 00 51 45 14 00

#### Article 4

02d0h-03bfh (240\*4=960 bytes, 960=03c0h, next address starts at 03c0h):

5A A5 F3 82 81 68 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00

#### Article 5

03c0h-04afh (240\*5=1200 bytes, 1200=04b0h, next address starts at 04b0h):

5A A5 F3 82 81 E0 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00

#### Article 6

04b0h-059fh (240\*6=1440 bytes, 1440=05a0h, next address starts at 05a0h):

5A A5 F3 82 82 58 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45 14 00 51 45  
14 00 51 45 14 00







[illegible]

Off0h-10dfh (18\*240=4320 bytes, 4320=10e0h, the next address starts from 10e0h) The last one is only 182 Bytes, the data length must be correct.

[illegible]

According to the 0xAA instruction definition and the first packet start 0x0100 address calculated in the first part, write the temporary data of the upper data variable space (RAM) 0x8000-0x8853 to Flash. According to the 0xAA instruction definition and the first packet start 0x0100 address calculated in the first part, write the temporary data of the upper data variable space (RAM) 0x8000-0x8853 address to Flash.

D11: 0x5A=Start one external memory operation, clear zero after CPU operation.

D10: Operation mode. 0x02, write 32Kbytes data block to external SPI NOR FLASH.

D9: D8: 32Kbytes memory block address, 0x0000-0x07FF, corresponding to the whole SPI NOR memory.

D7: D6: The first address of the data variable space where the update data is stored, must be even.

D5: D0: undefined, write 0x00.

5A A5 0F 82 00AA 5A 02 01 00 80 00 00 14 00 00 00 00

Read the write status (make a judgment whether the write is finished):

Read write status: 5A A5 04 83 00 AA 01

Return 5A02 means still writing: 5A A5 06 83 00 AA 01 5A 02

Read write status: 5A A5 04 83 00 AA 01

Return 0002 Description of write completion: 5A A5 06 83 00 AA 01 00 02

Write completion, reset command (equivalent to power down and power up once, write completion can be reset once)

5A A5 07 82 00 04 55 AA 5A A5

				<p>5. Caution</p> <p>1. Update the black screen:</p> <p>(1) Data sub-package error.</p> <p>(2) Data update location is not correct, such as the 14.bin file updated to 32.icl, it will empty the image data resulting in a black screen: 5A A5 0F 82 00 AA 5A 02 01 00 80 00 00 14 00 00 00 00 (e.g. RAM writes all 14 file data and writes to 32. (e.g. RAM writes all 14 files, and writing to position 32 will clear the picture data in Flash). 5A A5 0F 82 00 AA 5A 02 00 70 80 00 0014 00 00 00 00 00</p> <p>2. Update the splash screen:</p> <p>(1) A part of the image display screen: the last instruction data length check is 0xF3, if the data is less than 240 bytes, then the data length needs to be modified;</p> <p>(2) The data content part needs to be correct.</p>
0xB0	Touch instruction access interface	W	36	<p>0xB0: 0 x5 AA5 = enable accessing touch control interface once. <b>Clear after CPU operation.</b></p> <p>0xB1: Page ID of touch control.</p> <p>0xB2: <b>High byte</b>: touch control ID (set in DGUS II development software), 0x01-0xFF;</p> <p><b>Low byte</b>: touch control code, 0x00-0x7F.</p> <p>0xB3: Access mode</p> <p>0xB4-0xD3: data to modify of mode 0x02, 0x03.</p> <p>Mode 0x0000: <b>turn off</b> this touch control.</p> <p>Mode 0x0001: <b>turn on</b> this touch control.</p> <p>Mode 0x0002 : Read this touch control and write it to SRAM that 0xB4 pointing to.</p> <p>Mode 0 x0003 : update current touch control with data that 0 xB4 pointing to, the format and data length must be the same.</p> <p>Example command:</p> <p>Closes the 4 popup menu touch control in the routine, closing only part of the page. See 0xFC address for closing all touches.</p> <p>(1) Close command</p> <p>Close the popup menu on page 0, sequence 2: 5A A5 0B 82 00B0 5AA5 0000 02 01 0000</p> <p>Close the pop-up menu on page 0, sequence 3: 5A A5 0B 82 00B0 5AA5 0000 03 01 0000</p> <p>Close the pop-up menu on page 0, sequence 4: 5A A5 0B 82 00B0 5AA5 0000 04 01 0000</p> <p>Close the pop-up menu on page 0, sequence 5: 5A A5 0B 82 00B0 5AA5 0000 05 01 0000</p> <p>(2) Open after the above is closed</p> <p>Open the pop-up menu on page 0, sequence 2: 5A A5 0B 82 00B0 5AA5 0000 02 01 0001</p> <p>Open the pop-up menu on page 0, sequence 3: 5A A5 0B 82 00B0 5AA5 0000 03 01 0001</p> <p>Open the pop-up menu on page 0, sequence 4: 5A A5 0B 82 00B0 5AA5 0000 04 01 0001</p>

Open the pop-up menu on page 0, sequence 5: 5A A5 0B 82 00B0 5AA5  
0000 05 01 0001

(3)Note on "Clear after CPU operation"

The T5L refresh cycle is 20ms. When multiple instructions need to be closed, it takes one cycle for the CPU to clear and refresh before executing the next close instruction. That is, after the first instruction is sent, you can read the 0xB0 address to judge whether it is 0, if it is 0, execute the next instruction, and if it is not 0, do not execute the next instruction. You can use the 20ms cycle as the standard, delay 20ms before sending the next shutdown command, otherwise there will be a situation where only one shutdown is disabled, and other commands are invalid, for example, only a 5ms delay is required. At this time, one cycle is not refreshed, and the 0xB0 address is not cleared. If it is zero, if you continue to refresh the closing command in this cycle, other commands cannot be closed.

An example of the "clear after CPU operation" instruction is as follows:

Close popup menu for page 0 order number 2: 5A A5 0B 82 00B0 5AA5  
0000 02 01 0000

Read 0xB0 address: 5A A5 04 83 00B0 01;

Return: 5A A5 06 83 00B0 01 00 00; it has been cleared, and the next closing command can be executed at this time;

Read 0xB0 address: 5A A5 04 83 00B0 01;

Return: 5A A5 06 83 00B0 01 5A A5; not cleared, at this time, wait for the next close instruction;

(4)Command meaning

Close popup menu for page 0 order number 2: 5A A5 0B 82 00B0 5AA5  
0000 02 01 0000

0x5AA5: start command access;

0x0000: Turn off the touch on page 0;

0x02 : Turn off the No. 2 sorting touch on page 0;

0x01: No. 2 sorting touch on page 0 is a pop-up menu, the function key code is 0x01, and the key code value is shown in the list of touch functions;

0x0000: Disable command.

Precautions:

The basic touch cannot be controlled to turn on/off. If there is a ranking number in the PC software, it does not need to be counted in the number of valid touches, that is, the sorting ID needs to be subtracted from the number occupied by the front basic touch, such as 0000 page touch sequence 06 is the basic touch, 07 is the pop-up menu, then the command to close the pop-up menu is:

Correct: 5A A5 0B 82 00B0 0000 06 01 0000; touch sequence ID minus 1 invalid base touch.

Error: 5A A5 0B 82 00B0 0000 07 01 0000

If you need to change the specific attributes of the touch, you need to use mode 03 to replace the pre-written touch file starting with 0xb4 in the attribute configuration of the 13bin file.

#### (5) Touch ID + touch key code search

Touch ID:

Control view in the lower left corner - pull down and select touch control - sequence ID

#### Bottom left control view - drop down to select touch control - order ID

##### 6.1 List of Touch Variables

Number	Touch control code	Variable name	User variable length (Word)	Description
01	00	Variable Data Input	1/2/4	Input integer, fixed decimal and other data into the specified variable storage space. Pop-up keyboard transparency can be set. Support configuration touch control.
02	01	Popup Menu	1	Click to trigger a pop-up menu that returns the key code of the menu item. Popup menu transparency can be set.
03	02	Incremental Adjustment	1	Click the button to perform +/- operation on the specified variable, and set the step size and upper and lower limits. Setting the 0- 1 range loop enables the column check box function.
04	03	Drag Adjustment	1	Drag the slider to achieve variable data entry. The range can be set.
05	05	Return Key Code	1	Click the button to directly return the key value to the variable. Support bit variable return. Support press time threshold setting.

#### Touch key code:

##### 6.1 List of Touch Variables


Number	Touch control code	Variable name	User variable length (Word)	Description
01	00	Variable Data Input	1/2/4	Input integer, fixed decimal and other data into the specified variable storage space. Pop-up keyboard transparency can be set. Support configuration touch control.
02	01	Popup Menu	1	Click to trigger a pop-up menu that returns the key code of the menu item. Popup menu transparency can be set.
03	02	Incremental Adjustment	1	Click the button to perform +/- operation on the specified variable, and set the step size and upper and lower limits. Setting the 0- 1 range loop enables the column check box function.
04	03	Drag Adjustment	1	Drag the slider to achieve variable data entry. The range can be set.
05	05	Return Key Code	1	Click the button to directly return the key value to the variable. Support bit variable return. Support press time threshold setting.

0xD4	TP operation simulation	W	5	<p>0xD4: 0x5AA5= enable the operation once, clear after operation.</p> <p>0xD5: press mode. 0x0001=press, 0x0002=release, 0x0003=keep pressing, 0x0004=touch (press + release)</p> <p>0xD6: X coordinate of press position.</p> <p>0xD7: Y coordinate of press position.</p> <p>After simulating mode 0x0001 and 0x0003, must simulate 0x0002.</p> <p>When the assembly touch function is running, x= 0xAA:KH y=0xA5: KL will directly return the key values KH and KL to the assembly touch.</p> <p>For example, when variables are input in assembly mode, the coordinates (0xAAF0, 0xA5F0) will cause the input to end immediately.</p> <p>When the 13 touch file is designed with keying function, X coordinate = 0xFF: key code y coordinate = 0x0001 will trigger the corresponding keying function.</p> <p>E.g.</p> <p>5AA5 0B 82 00D4 5AA5 0004 00EE 008F</p> <p>0004 is click, press + lift, 00EE 008F (283,143) coordinates,</p> <p>Press mode 0x0001=press; 0x0002=release; 0x0003=continue pressing</p> <p>0x0004=click</p> <p>After applying the simulated lift modes 0x0001 and 0x0003, there must be a simulated lift mode of 0x0002.</p> <p>( after “ touch panel sound control" is enabled, touch panel operation simulation will also trigger the touch panel buzzer)</p> <p>(after “ touch panel backlight standby control" is enabled, touch panel operation simulation will also wake up backlight)</p>
0xD8	Pointer icon overlay display		4	<p>0xD8_ H: 0x5A = enable the overlay display.</p> <p>0xD8_ L: the position of ICL file which the pointer icon is saved at.</p> <p>0xD9: the pointer icon ID.</p> <p>0xDA: the X coordinates of pointer icon.</p> <p>0xDB: the Y coordinates of pointer icon.</p> <p>The pointer icon is always displayed in the background filtering mode, and the background filtering intensity is fixed at 0x08.</p> <p>E.g.</p> <p>5A A5 0B 82 00D8 5A 2D 0001 0064 0064 call the 1 Icon of 45.ICL icon to display directly on the screen page position (100100).</p> <p>Note: After switching page, icon overlay will not disappear.</p> <p>write 00 to 0xD8_ H or call the blank position icon to make the icon disappear.</p> <p>The ID of the icon can be selected by the user to achieve the image display effect of “click” and “wait” effect.</p>
0xDC	Music WAE file switch	W	2	<p>D3: 0x5A indicates that the music WAE file switching function is turned on, and it is initialized to 0x00 (off) after power-on.</p> <p>D2: Undefined, write 0x00.</p> <p>D1:D0: music WAE file ID.</p>



66

0xDE	Background ICL Switch	W	2	<p><b>0xDE multi-language background picture ICL file switching:</b></p> <p>1. Application instructions</p> <p>By switching the ICL background pictures of different IDs, one-click switching of multiple languages can be realized. For example, to make 4 sets of pictures in different languages, the remaining 3 sets only need to generate ICL background images, called through the pop-up menu, 13/14 files share one project.</p> <p>2. Function setting</p> <p>(1) Write 0x5A into the high byte of address 0x00DE to enable the function.</p> <p>CFG file 0x08 address power-on specified background picture ICL position 0x20, 0x00DE power-on initialization no longer supports specification.</p> <p>①Touch on: You can use the key value to return, the address is set to 0x00DE, the key value is written to 0x5A, and the high byte is checked. When the high byte is selected, the low byte of the return key value is stored in the high byte address (VP_H) of the VP word address.</p> <p>②Command opening: 5A A5 05 82 00DE 5A00.</p> <p>(2) 0x00DF address is written to the background picture ICL file ID.</p> <p>Use the pop-up menu to select the switch, the address is set to 0x00DF, the basic touch key value on the menu corresponds to the ICL file ID of the picture in different languages, and the key value is a hexadecimal parameter.</p> <p>3. Background image</p> <p>(1) Name the picture material</p> <p>For example: Chinese image naming IDs are 0, 1, 2, 3; other language naming IDs also need to be 0, 1, 2, 3 for parallel replacement and calling.</p> <p>(2) ICL background image naming</p> <p>①The ICL file is stored in 16MB NORFLASH, and is called according to the ID, and the ID position is calculated as follows.</p> <p>Font position calculation: "x" file size*1024/256=N (occupies several 256KB subspaces), such as "x" file 1.28MB, <math>1.28 \times 1024 / 256 = 5.12</math>, rounded up, 0.12 also occupies a part of 256KB, one needs to be counted, that is, the "x" file occupies 6 spaces, and 16, 32, and 48 custom files are calculated according to this.</p> <p>For example, the number 16 music file is 1.28MB, that is, the file occupies 6 spaces of 16, 17, 18, 19, 20, and 21. At this time, if you put a Chinese character font and name it 17, the name is wrong, and you need to put it in another location according to the above calculation.</p> <p>②ID+Chinese remarks, such as 61_English.ICL, add remarks for easy identification and setting.</p>
------	-----------------------	---	---	--

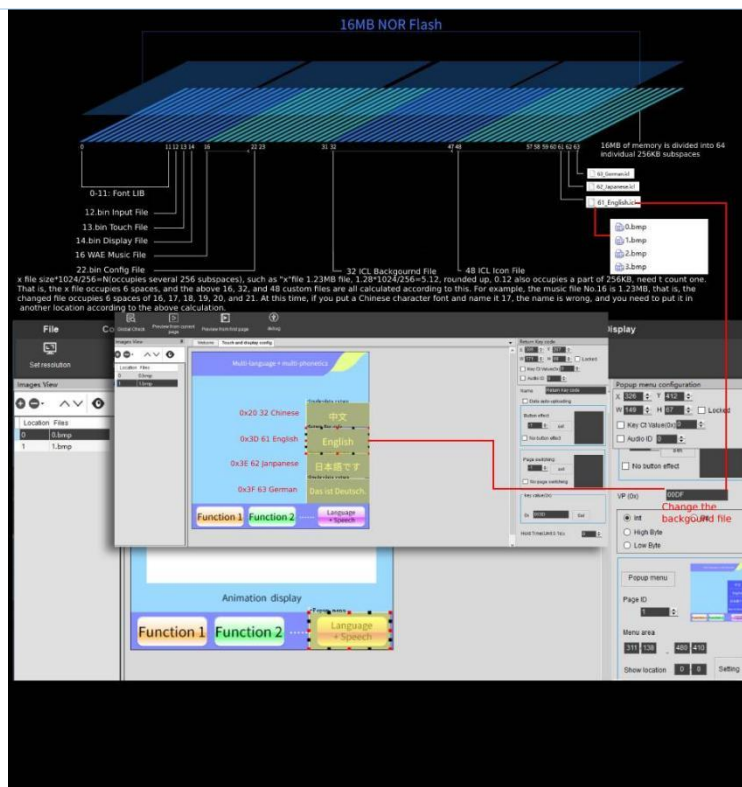

### 0xDE multi-language background image + ICL file switching of different language icons

DEMO production is the same as above.

#### 1. Application instructions

When DEMO is in multiple languages, it is used to switch control icons with language characters.

#### 2. Function setting

DEMO production is the same as above. Different language folders have added control icons with language characters.

#### 3. Control icons with language characters

##### (1) Icon distinction

This refers specifically to control icons with language characters, such as Chinese "on, off" 2 icons, English "on, off" 2 icons, Japanese "on, off" 2 icons, German "on, off" 2 icons, 4 groups of 8 are required, and they are respectively placed in the background picture folder of the same language.

The general icon is the same as the standard DEMO setting, just put it in the 48.ICL position.

##### (2) Icon naming

Control icons with language characters can be named starting from 100, IDs 0-99 are reserved for background pictures, so that background pictures can be added when making DEMO.

##### (3) Icon call

For the "Variable Icon Display" control, select icon library No. 0 as the icon file, which means to call N small icons (small pictures) with different IDs contained in the background icon library. At this time, it points to the 32.ICL background image library. Icon file "0" is just a trigger flag, not an icon library number 0

0xDE	Background ICL Switch	W	2	<p>DEMO production is the same as above.</p> <p>1. Application instructions</p> <p>When DEMO is in multiple languages, it is used to switch control icons with language characters.</p> <p>2. Function setting</p> <p>DEMO production is the same as above. Different language folders have added control icons with language characters.</p> <p>3. Control icons with language characters</p> <p>(1) Icon distinction</p> <p>This refers specifically to control icons with language characters, such as Chinese "on, off" 2 icons, English "on, off" 2 icons, Japanese "on, off" 2 icons, German "on, off" 2 icons, 4 groups of 8 are required, and they are respectively placed in the background picture folder of the same language.</p> <p>The general icon is the same as the standard DEMO setting, just put it in the 48.ICL position.</p> <p>(2) Icon naming</p> <p>Control icons with language characters can be named starting from 100, IDs 0-99 are reserved for background pictures, so that background pictures can be added when making DEMO.</p> <p>(3) Icon call</p> <p>For the "Variable Icon Display" control, select icon library No. 0 as the icon file, which means to call N small icons (small pictures) with different IDs contained in the background icon library. At this time, it points to the 32.ICL background image library. Icon file "0" is just a trigger flag, not an icon library number 0</p>
0xDC	Reserved		4	Undefined.

<b>0xE0</b>	Memory CRC check	R/W	2	<p>D3: write 0x5A to enable the CRC checking once, clear after operation.</p> <p>D2: memory type selection</p> <p>0x00= font space ( 16Mbytes memory)</p> <p>0x02= DWIN OS code</p> <p>0x03= Nor flash database (LIB file).</p> <p>D1:D0: data interface.</p> <p>► Enable the CRC</p> <p>Font check mode: D1= start font ID (256 KB for each font); D0= the number of 4KB blocks checked, 0x00-0xFF.</p> <p>OS code check mode: D1:D0 = starting at 0x1000 , the byte length of OS code to be checked is 0x0001-0x7000.</p> <p>Nor flash database mode: D1:D0 = Nor flash database ID, fixed validation of 4 KB data each time.</p> <p>► After the check</p> <p>Returned CRC value.</p>
<b>0xE2</b>	Export the monochrome bitmap of the specified area on the screen	R	6	<p>0xE2_H: 0x5A A monochrome bitmap export is started and the CPU is cleared.</p> <p>0xE2_L: Brightness threshold when exporting bitmaps, 0x20-0xDF (0x3F recommended)</p> <p>0xE3: X coordinates of the upper left corner of the screen area;</p> <p>0xE4: Y coordinate of the upper left corner of the screen area;</p> <p>0xE5: X coordinates in the lower right corner of the screen area;</p> <p>0xE6: Y coordinate in the lower right corner of the screen area;</p> <p>0xE7: The start address of variable storage stored in the output bitmap must be an even number.</p> <p>Bitmap data stored in variable storage, aligned to lines according to MSB, double word pattern.</p>
<b>0xE8</b>	Page stacking switch	W	2	<p>0xE8_H: 0x5A Enable page overlay function, set other value to disable the function;</p> <p>0xE8_L: Enable page overlay post-touch mode; 0x00=does not respond to overlay page touches; 0x01 = only respond to the touch of the overlay page;</p> <p>0xE9: the ID of the page to be overlayed.</p>
<b>0xA0-0xEF</b>	Reserved		12	Undefined
<b>0xF0</b>	Interface of playing music flow data	W	4	<p>D7: 0x5A= enable the music playback operation, clear after operation.</p> <p>D6: mode, 0x00=stop(clear the buffer), 0x01=suspend(reserve the buffer), 0x02=start.</p> <p>D5:D4: undefined, write 0x00.</p> <p>D3:D2: Variable memory address for storing music data, even.</p> <p>D1:D0: Music data word length, maximum 8KWords, even; data is 16bit integer format.</p>



				<p>This instruction is used to play online music files. First, send the music flow data to a variable address between 0x1000 and 0xFFFF.</p> <p>For example, the buffer address is 0x8000.</p> <p>1.WAV conversion</p> <p>Convert the stereo WAV file with the "To wav" tool to a single WAV file.</p> <p>Such as the three -dimensional WAV file format of the routine:</p> <p>Sampling rate: 44100Hz      Voice: stereo</p> <p>Bit depth: 16 bits</p> <p>Format: 16-bit integer of waveform audio.</p>
--	--	--	--	--

The conversion single -channel WAV file format:

Sampling rate: 32000Hz

Voice: Mono


Bit depth: 16 bits

Format: 16-bit integer of waveform audio.

Mono is a left channel or right channel voice, which can be used in the files required by the above format.

## 2. Copy WAV audio data to the initialization of file 22

Set the start address of the VP variable of DGUS screen to 0x8000, copy an empty 22 file to the DWIN\_SET folder, and copy the WAV data to the start address of the 22 file at 0x1000. The DGUS screen is in MSB mode, and the WAV and WAE files are in LSB mode, so when copying the data, the first byte of the data portion will not be copied, and the whole byte of the data will be shifted.

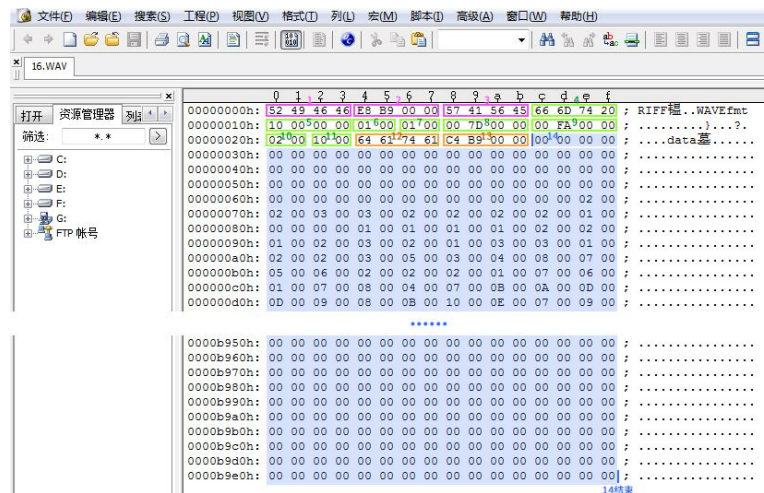

## 3. Download the 22 file to the DGUS screen

Download online or SD card.

## 4. Instruction playback

Each time you send 8KWords data, 8KWords is 8\*1024, that is, the variable address interval is 0x2000. 1 thousand bytes (KB) = 1024 bytes (bytes).

5A A5 0B 82 00F0 5A02 0000 8000 2000

5A A5 0B 82 00F0 5A02 0000 A000 2000

5A A5 0B 82 00F0 5A02 0000 C000 2000

5A A5 0B 82 00F0 5A02 0000 8000 2000

Meaning: 0x5A A5: Frame head;

0x0B: Data length, 0x82 starts, without 0x0B bytes;

0x82: Write instructions;

0x00F0: Music flow interface address;

0x5A02: Write 0x5a to start a music playback, and the CPU operation is cleared.

0xF0

Interface of playing  
music flow data

W

4



0xF0	Interface of playing music flow data	W	4	<p>0x02 = Play</p> <p>0x0000: Not defined, write 0x00.</p> <p>0x8000: Variable memory address to save music data, even.</p> <p>0x2000: The length of the music data that needs to be played, the maximum 8KWords, the even number; the audio data is 16bit integer format.</p> <p>5. Explanation</p> <p>(1) Effective voice data and all voice data</p> <p>0x2000, 10-proof is 8192, <math>47556/8192 \approx 5.81</math>, that is, 6 instructions are written with complete data. When playing, the first two instructions can be played with valid audio for 16kwords data. The latter part is noise and invalid data, which is related to voice pronunciation and ending time.</p> <p>(2) Playing is a click noise.</p> <p>DGUS MSB mode, WAV/WAE file is LSB mode, the first byte of the audio data is removed, and the data is staggered as a whole.</p>
0xF4	Painting interface(The function has been removed after the V45 update)	W	8	<p>D15: 0x5A= enable the drawing touch window.</p> <p>D14: operation mode, 0x00= normal mode, 0x01= initialization (clear after initialization).</p> <p>D13: parameter configuration.</p> <p>7-2 reserved, write 0.</p> <p>1-0 painting buff processing mode after page changing. 0x00 = close, 0x01= re- initialization, others = unchanged. D12: reserved, write 0x00.</p> <p>D11: line width, from 0x01 - 0x0F.</p> <p>D10:D8: painting color, D6=RED D5=GREEN D4=BLUE</p> <p>D7:D4: the coordinate position of the window upper left corner(x,y).</p> <p>D3:D2: the width of the pixel points window, must be divisible by 4</p> <p>D1:D0: the height of the pixel points window, must be divisible by 4</p> <p>The variable memory occupied by drawing touch window is 12 8 KB(Double word address range 0x00:8000-0x00:FFFF) which is corresponding to 208*208 pixel.</p>

				<p>This instruction is used after touching screen. Display the track of coordinates in the designated area of the screen, which is generally used in "handwriting drawing function".</p> <p>E.g.</p> <p>0x00 mode= normal mode</p> <p>1. Send drawing window instruction on a page:</p> <p>Tx: 5A A5 13 82 00 F4 5A 00 00 00 02 FF 00 00 00 2C 00 BC 00 D0 00 D0</p> <p>2. Hand touch panel drawing graphics</p> <p>3. Switch page</p> <p>4. Switch back to the previous page, send the drawing window instruction again, and the characters will be displayed again. In the upper left corner of the window (44, 188), the coordinate point corresponds to the largest 208*208 pixel drawing window.</p> <p>0x01 mode: initialization mode</p> <p>1. Send a drawing window instruction on a page,</p> <p>Tx: 5A A5 13 82 00 F4 5A 01 00 00 02 FF 00 00 00 2C 00 BC 00 D0 00 D0</p> <p>2. Hand touch screen to draw graphics,</p> <p>3. Switch pages</p> <p>4. Switch back to the previous page, and send the drawing window instruction again, the characters are no longer displayed, and the blank is convenient for redrawing the graphics.</p>
0xFC	DGUS_STOP_EN	W	2	<p>Writing 0x55 AA 5A A5 will stop the DGUS refresh, which is used to avoid the conflict of rewriting fonts when there is no backup area to upgrade.</p> <p>Write 0x55 AA 5A AA will stop DGUS refresh, stop OS core running, used for ED4 download fixed occupancy variable buffer</p> <p>The buffer area is 0x8000 - 0xFFFF, to prevent DGUS refresh or OS core operation from rewriting variables to cause upgrade data errors. Writing 0x55 AA 5A 5A will <b>stop the touch processing</b> and no longer respond to touch screen operation (0x0016 variable coordinates normal update).</p> <p>Instruction example:</p> <p>Close all touch: 5A A5 07 82 00FC <b>55AA 5A5A</b></p> <p>Open all touch: 5A A5 07 82 00FC <b>0000 0000</b></p> <p>Close part of the touch can refer to the 0xB0 instruction.</p>
0xFE	UART1 high speed download		2	0x5AA5= enable the high- speed download operation through UART1
0x100	FSK bus interface	R/W	512	FSK bus interface, supports up to 31 bus devices.

0x300-0x37F	Dynamic curve interface	R/W	128	<p>0x300- 0x30F: state feedback for 8 channel curve buffers (read only advised), 2 words per channel, high word is the storage pointer location (0x000-0x07FF) where curve data is stored, and low word is the effective data length of curve buffer (0x0000-0x0800). Writing 0x0000 to the effective data length of the curve buffer will cause the curve unable display.</p> <p>0x310-0x311: start writing curve buffer data</p> <p>D3: D2: 0x5AA5 enable the writing curve buffer data operation once, and clear after operation.</p> <p>D1: the number of data blocks, 0x01-0x08.</p> <p>D0: undefined, write 0x00.</p> <p>0x312-0x37F: data block written to the curve buffer, which is 16 bits unsigned. Single data block: data channel ID (0x00-0x07) + data word length (0x01-0x6E) + data.</p> <p>With dynamic curve display enabled, start at 0x1000 and create a data buffer for each curve according to 2K words per channel.</p> <p>The CH0 buffer is 0x1000-0x17FF, the CH1 buffer is 0x1800-0x1FFF, and so on, the unused curve buffer zones can be used as user variables. Also users can directly overwrite the curve buffer data and then modify 0x300 - 0x30F corresponding storage pointer position and data length to ensure the correct display of the curve.</p> <p>Instruction example: See 7.4.1 Real-time Curve (Trend) display.</p>
0x380	The first channel curve data automatic reading configuration	W	2	<p><b>D3:</b> 0x5A enables the curve data of the first channel to be automatically read from the variable space;</p> <p><b>D2:</b> The time interval of automatic reading, the unit is 10ms;</p> <p><b>D1:D0:</b> variable space address.</p> <p>(1) Function description: The data displayed by the curve can be configured to be read from the specified variable address when the OS is approved, which is convenient for the display of the curve of the variable (such as temperature) with a low refresh rate. It is necessary to upgrade the OS kernel program to V21 and above.</p> <p>The latest kernel link is in the compressed package of DGUS V60 software: <a href="https://forums.dwin-global.com/index.php/forums/topic/notes-on-dwin-dgus-t5l-kernel-firmwarev60-upgrade/">https://forums.dwin-global.com/index.php/forums/topic/notes-on-dwin-dgus-t5l-kernel-firmwarev60-upgrade/</a></p> <p>(2) For details on the setting, negative number setting and curve address range on the curve DGUS software, see section 7.4.1 Real-time curve trend graph.</p> <p>(3) Correspondence between the 8 channels and the starting address of the system variable interface:</p> <p>Channel 0: 0x0380</p> <p>Channel 1: 0x0382</p> <p>Channel 2: 0x0384</p> <p>Channel 3: 0x0386</p> <p>Channel 4: 0x0388</p> <p>Channel 5: 0x038A</p> <p>Channel 6: 0x038C</p> <p>Channel 7: 0x038E</p>

#### (4) Command example:

① Use channel 0 of the curve, the data range is 0 to 100, the variable address is 0x6000, and it is read once every 100ms.

The command is as follows:

Variable address write data 50: 5A A5 05 82 6000 0032

Read to channel 0 of curve: 5A A5 07 82 0380 5A0A 6000

There is only one data, and the curve will be displayed in a straight line.

Variable address write data 00: 5AA5 05 82 6000 0000

Variable address write data 50: 5AA5 05 82 6000 0032

Variable address write data 100: 5AA5 05 82 6000 0064

Read to channel 0 of curve: 5A A5 07 82 0380 5A0A 6000

The more data, the larger the range of the curve display.

② Use channel 1 of the curve, the data range is 0 to 100, the variable address is 0x6001, and it is read once every 100ms.

The command is as follows:

Variable address write data 50: 5AA5 05 82 6001 0032

Read curve to channel 1: 5AA 07 82 0382 5A0A 6001

③ Use the curve 7 channels, the data range is 0 to 100, the variable address is 0x6007, and it is read once every 100ms.

The command is as follows:

Variable address write data 50: 5AA5 05 82 6007 0032

Read curve to channel 7: 5AA 07 82 038C 5A0A 6007

④ Use channel 0 and channel 1 to read data of address 0x6000 and 0x6001 at the same time. The data range is 0 to 100, and the data is read once every 100ms. The default variable address has the correct value. The command is as follows:

5AA5 0B 82 0380 5A0A 6000 5A0A 6001 (separate from the start channel address, continuous write operation can be completed by one instruction)

⑤ Use channel 0, channel 1, channel 2, channel 3, channel 4, channel 5, channel 6, channel 7, and read data of address 0x6000, 0x6001, 0x6002, 0x6003, 0x6004, 0x6005, 0x6006, 0x6007 at the same time, the data range is 0 To 100, read once every 100ms, the default variable address has the correct value, the instruction is as follows: 5AA5 23 82 0380 5A0A 6000 5A0A 6001 5A0A 6002 5A0A 6003 5A0A 6004 5A0A 6005 5A0A 6006 5A0A 6007

Write multiple consecutive addresses to change data from the initial variable address, and rewrite addresses 0x6000, 0x6001, 0x6002, 0x6003, 0x6004, 0x6005, 0x6006, and 0x6007 at the same time.


Write data 0, the instruction is as follows: 5AA5 13 82 6000 0000 0000 0000 0000 0000 0000 0000

Write data 50, the instruction is as follows: 5AA5 13 82 6000 0032 0032 0032 0032 0032 0032 0032

Write data 100, the instruction is as follows: 5AA5 13 82 6000 0064 0064 0064 0064 0064 0064 0064

#### (5) Effect diagram

The above command is 8 horizontal lines when the data is not refreshed.

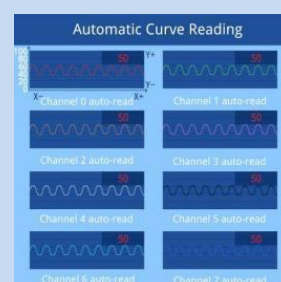



<b>0x382</b>	Channel 2-8 configuration	W	14	The definition is the same as channel 1.
<b>0x390</b>	Reserved	-	112	Undefined, not available for user.
<b>0x400-0x4FF</b>	Network communication interface	R/W	256	WiFi and other Internet communication equipment application control interface.
<b>0x500 - 0x5BF</b>	Multi- Media interface	R/W	192	Multi-Media application interface, 0x500-0x57F digital Multi-Media interface, 0x580-0x5BF analog Multi-Media interface.
<b>0x5C0-0x5FF</b>	External memory interface	R/W	64	External memory interface ( such as U disk) read or write interface.
<b>0x600-0xEFF</b>	Reserved		2404	Undefined. Not available for users.
<b>0x0F00</b>	Variable change indication	R	2	<p>After setting variables to change the automatic upload function, this function is enabled.</p> <p>D3 =5A means variable change, D2:D1= variable memory pointer, D0 = variable length ( word).</p>
				<p>E.g.</p> <p>It is used to judge whether the touch data is uploaded to the serial port, or whether there is a touch control operation change for uploading.</p> <p>Because the time of this state is very short, it can't be read with the serial port 0x83 instruction. It is recommended to read the value of D3 with DWIN OS and then judge.</p> <p>LDWR R0,0 F00H IJNE R10, 5 AH, TEXT; Judge the value of 0x5 A and execute it down, if not jump to TEXT</p> <p>Application example 2: It is used to judge whether the data of different addresses is changed, and OS can also be used for judgment processing.</p> <p>Send: 5A A5 04 83 0F 00 02 Response: 5A A5 08 83 0F 00 02 00 11 00 01 means that the variable address 0x1100 has uploaded 1 word of data.</p> <p>Send: 5A A5 04 83 0F 00 02 Response: 5A A5 08 83 0F 00 02 0010 00 02 means that the variable address 0x1000 has uploaded 2 words of data.</p> <p>Application example 3: 0x0F00 variable space. After writing 0x5a + VP + Len, the bottom layer will directly send the VP address. The data of the length of the Len word is sent from UART2 to the serial port in the format of the 0x83 instruction.</p> <p>Instruction format:</p> <p>Send: 5A A5 07 82 0F00 5A 10 02 03 Answer: 5A A5 03 82 4F 4B</p> <p>5A A5 0A 83 1002 03 0000 0000</p>
<b>0xF02-0xFFF</b>	Reserved		254	Undefined, User cannot use.

0x 1000-0xFFFF are available for users.

## 5.2 FSK bus interface

(0x0100-0x02FF variable address space)

Definition	Address	Length	Description
FSK interface control	0x100	2	<p>D3: FSK bus control; 0x00 = bus off, 0x5A= bus on, 0xA5 = reconfigure the bus once ( it will be changed to 0x5A automatically after the configuration is finished).</p> <p>D2: Bus configuration; .7 Broadcast instruction send1 = Start broadcast instruction transmit once and clear automatically after the transmit. .6-.4 Double word length of broadcast instruction data, 0x01-0x07 . .3 - .0 Bus speed configuration, the lower the speed the longer the communication distance. 0x00=100Kbytes/S; 0x01=200Kbytes/S; 0x02=400Kbytes/S; 0x03=600Kbytes/S. 0x04=1 Mbytes/S; 0x05-0x0F: undefined. D1: Bus answer wait time, 0x01-0xFF,unit of 0.125mS. The DGUS screen acts as the master and polls the bus devices according to the configuration of the device interface. If no device answer data is received within the answer wait time, the next device will be polled. D0: Reserved, write 0x00.</p>
Broadcast instruction data	0x101	14	D27- D0: Broadcast instruction data, the broadcast instruction transmit has the highest priority and is delayed by a maximum of 1 DGUS cycle.
Device interface 1	0x110	16	<p>The 1st FSK device control interface, each device takes up fixed 16 words(32 bytes). Device interfaces can be dynamically assigned to different devices. D31, device switch. .7=1 device on, .7=0 device off. .6-.5 Reserved, write 0. .4-.0 indicates device ID, 0x00-0x1E. D30-D29 : DGUS screen reads the double word address of the bus device data stored into the variable space, 0x0800-0xBFFF, 184 KB in size. The format of the data stored to the variable space is 0x5AA5 + data word length + data. D28: Double word length of the data sent to the device, 0x01-0x07. D27-D0: Data sent to the device.</p>
Device interface 2	0x120	16	The 2rd FSK device control interface,
.....	.....	.....	.....
Device interface 63	0x2F0	16	The 31th FSK device control interface,

### 5.2.1 FSK bus camera application

#### ● Display

The camera video display is implemented by using the 0x5A08 variable data JPEG icon overlay display control, which matches the control's VP address ( word address) with the corresponding camera's device interface storage address and reserves enough space.

For example, the video of bus camera 0# (ID=0x00) is displayed at (16,16), the display window size is 640\*480 pixels. The variable space used starts from 0x01:0000 and 40 KB of storage space is reserved.

```

0 1 2 3 4 5 6 7 8 9 a b c d e f
00004080h: 5A 08 FF FF 00 07 00 00 00 10 00 02 80 01 E0 ; 2. ....€.?
00004090h: FF 01 00 81 00 00 00 00 00 00 00 00 00 00 00 ; ..?.....

```

Corresponding display control configuration data



Use device interface 2 for 0# camera, storage location from address 0x010000, corresponding configuration instruction. **5A**

**A5 06 82 0120** (device interface 2) **80**(0# device on) **8000**(double word address for data storage)

The storage space is calculated according to 1bit per pixel, e.g., 640\*480 resolution = 640\*480/8192= 37.5KB, which can be reserved as 40 KB.

### ● Configuration

This is achieved by defining instructions at locations D27-D0 in the device interface ( or broadcast instruction data), with D27 being the instruction and D26-D0 being the data. The instruction set is as follows .

Instruction	Data	Description
0x51	D26: Camera configuration value. .7 Left and right mirroring control, 0= normal 1=mirroring. .6 IR illumination switch, 0=off 1=on. .5-.0 Reserved, write 0. D25:D24: Camera horizontal resolution, must be a multiple of 4. D23: D22: Camera portrait resolution, must be a multiple of 4.	Camera configuration value, not saved after power down. Resolution cannot exceed 64 KB memory space (800*600 is slightly larger).
0x52	D26: Camera configuration value, same as 0x51 instruction. D25 : D24: Camera horizontal resolution, same as 0x51 instruction. D2 3: D22: Camera portrait resolution, same as 0x51 instruction. D21: FSK bus interface speed (0x00-0x04)	Camera power on parameters configuration, saved after power down. The camera will reboot once after configuration. The factory initial configuration is 00 02 80 01 E0 04.
0x5D	D26 : The number of register data groups to be modified, 0x01-0x0D. D25 : D0: Register data, two bytes per group ( address:data), up to 13 groups.	Camera debug instruction ( user should not use).
0x5F	D26: Configured camera bus address, 0x00-0x1E. Default 0x00.	Camera bus address configuration, the camera will reboot once after configuration.

The data not used in the configuration is not written or not sent.

Configure the 0# camera resolution of device interface 2 to 640\*480, left and right mirroring.

The corresponding configuration instruction is as follow.

**5AA5 0D 82 0120 80 8000 02** (transmit only 2 double words) **51**(camera configuration instruction) **80**(left and right mirroring) **02 80 01 E0**

### 5.3 Network Interface

DWIN has developed a WiFi module "WiFi-10" and a cloud platform "DWIN Cloud" for AIOT applications.

WiFi- 10 is specially designed for the DGUS development platform, and the data interfaces have been defined, which greatly reduces the development difficulty and shortens the development time for users.


DWIN DGUS II platform ( including T5 series and T5L series) has open network interface with WiFi module. Through simple DGUS development, you can access DWIN cloud. Based on DWIN's cloud platform, customers can realize remote APP control, data analysis, equipment operation and other functions.

Note: The green filled part of the table indicates that the user can choose to modify it according to the actual situation.

For other parts, it is generally recommended to keep the default value and configure the 22.bin file corresponding to the double byte address.

Definition	Address	Length (Word)	Recommended value(hex)	Instructions
Network Switch Interface	0x400	1	5AA5	0x5AA5 indicates that the network communication interface is enabled
				Recommended value description: Generally 0x5AA5 is written as a fixed value to 22 file. It is also possible to use the configuration button to return or incremental adjustment and other touch controls to write the trigger key value 0x5AA5 to address 0x400 to achieve the opening of the network interface.
RAM ALARM	0x401	3	0000 0000 0000	D5-D4: 0x5AA5 enable the RMA spatial data uploading to the server, clear after operation. D3 - D2: RMA variable memory address to be uploaded. D1-D0: the word length of the RMA variable memory to be uploaded. (Currently up to 4KByte)
				Recommended value description: It is used to transmit the data of the variable address on the screen to the Cloud server, which is usually applied to the Cloud call view of the alarm history information and other parameters. If you do not need to use this function, you can fill in 0000 by default in 22 file.
Reserve	0x404	12	All 00	Reserved.
Device Description	0x410	1	5A45	High byte: 0x5A indicates that the device description is valid. Low byte: the encoding method and length of the device description text. 7-.6: encoding 0x00= UNICODE 0x01=GBK, GBK is recommended. 5-.0: describes the text length 0x00-0x34.
	0x411	2		Recommended value description: Write the configuration at a fixed value of the 22 file corresponding address, the encoding method GBK written here, the text length is 05. Device manufacturer ID, assigned by DWIN factory, 0xFFFF: 0000-0xFFFF: FFFF segment is reserved. After the device is added to the DWIN cloud platform, it is automatically generated by the platform.

	0x413	1		The classification of each manufacturer's equipment is according to the DWIN classification standard equipment classification. After the device is added to the DWIN cloud platform, it is automatically generated by the platform.
	0x414	2		The individual device number of each type of device. After the device is added to the DWIN cloud platform, it is automatically generated by the platform.
	0x416	26	44475553325F5 43555494431 (behind all 00)	Device description text, up to 52 Bytes. Recommended value description: 44475553325 F543555494431, corresponding to the ASCII code character DGUSII_T5UID1, has been written as a fixed value written in 22 file. The user can also make a text variable address association for display.

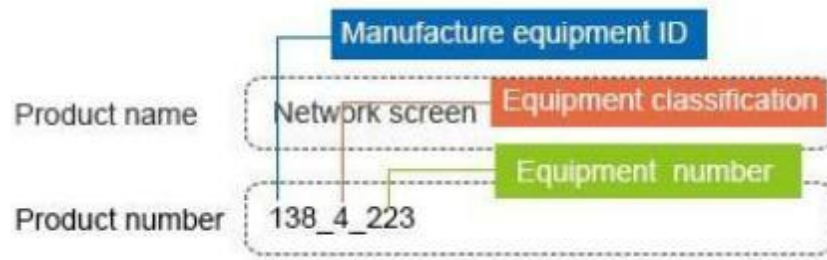

Device Description ( RMA Mapping)	0x430	1	012C	RMA automatically refreshes the server interval 0x0000-0xFFFF in 0.1 seconds. Recommended value description: 0x0000 indicates that automatic refresh is not required. 0x012C indicates that the automatic refresh interval is 30 seconds.
	0x431	1	1000	RMA (mapped to the server's variable memory) read space start address, word address, out of bounds can not be read. Recommended value description: 0x1000 indicates that start reading space from 0x1000 address.
	0x432	1	0004	RMA read space size in 128 Words with a maximum size of 2KBytes and 0 x0000 indicates forbidden reading. Recommended value description: 0x0004 indicates that the read space size is 512 Words, which can be set to 0x01F4 at most.
	0x433	1	2000	RMA write space start address, can overlap with the read space, can not write out of bounds. Recommended value description: 0x2000 indicates that the space is read from the address of 0x2000.
	0x434	1	0004	RMA write space size in 128Words with a maximum size of 2KWords, 0x0000 indicates write forbidden. Recommended value description: 0x0004 indicates that the read space size is 512 Words, which can be set to 0x01 F4 at most.
	0x435	3	All 00	Reserved

Device Description (Remote Upgrade)	0x438	1	5AA5	<p>The remote upgrade interface is enabled. 0x5AA5 indicates that the device is enabled with the remote upgrade interface. The system will automatically detect the Buffer.</p> <p>Recommended value description: Generally 0x5AA5 is written as a fixed value to 22 file. It is also possible to use the configuration button return or incremental regulation and other touch controls to write the trigger key value 0x5AA5 to address 0x438 to achieve the switch.</p>
	0x439	1	0064	Remote upgrade packet timeout timer configuration in 0.1 second.
	0x43A	4	5A 00010 00000 0F00	<p>The first remote upgrade space for the device ( aligned to 4 KB) is defined:</p> <p>D7: 0x5A indicates that the remote upgrade space is enabled.</p> <p>D6 - D3: 32 - bit start address of the upgradeable space ( lower 12 bits is 0), up to 4 GB.</p>
	0x43E	4	5A00 0000 0000 0000	The second remote upgradeable space definition for the device
	0x442	4	All 00	The third remote upgradeable space definition for the device
	0x446	4	All 00	The fourth remote upgrade space definition for the device.
	0x44A	2	5A 00 08 B0 00	<p>Remote upgrade Buffer interface definition:</p> <p>D3: 0x5A indicates that the remote upgrade Buffer is valid.</p> <p>D2: upgrade mode 0x00=the communication side is responsible for verifying the data CRC, and the error frame informs the host to resend.</p> <p>D1: the number of buffers available for remote upgrades, 0x01-0x10, up to 16.</p> <p>D0: the starting address of Buffer0 is high byte ( word address) and low address is 8bit 0x00.</p> <p>Each Buffer is fixed in 2304 words (0x900) space, which is arranged in the back row.</p> <p>A single Buffer definition ( the first 512 bytes is the control interface, the next 4KB is the data):</p> <p>D0:0x5A means to start the remote upgrade of this buffer once, and clear it after CPU processing.</p> <p>D1: Remote upgrade space selection, 0x00-0x03 , one of 4 remote upgrade spaces.</p> <p>D2-D5 : Write the destination address of the remote upgrade space. The lower 12 bits are 0 (aligned to 4KB).</p> <p>D6-D7: Data byte length, 0x0001-0x0FFF. D8-D9: Data CRC checksum.</p> <p>D10-D511: Reserved.</p> <p>D512: Data starts, up to 4096 bytes.</p>
	0x44C	4	All 00	Reserved

Device Description QR Code	0x450	48		<p>Device QR code.</p> <p>The QR code is automatically generated according to the device description data of 0x411, 0x413, and 0x414, and the function of downloading the APP, binding the device, and paying attention to the public number can be implemented with the mobile phone.</p>
Communication Device Description	0x480	16	User- defined	<p>D31: 0x5A indicates that the communication device description data is valid.</p> <p>D30: The encoding method and length of the device description text.</p> <p>7-.6 Encode mode 0x00= UNICODE 0x01= GBK, GBK is recommended.</p> <p>5-.0 Description: The length of the text is 0x00-0x14.</p> <p>D29: Communication device category 0x01= WiFi</p> <p>6-D28 : Communication device status, bit definition</p> <p>7 Equipment working status 0 = Configuration 1 = Normal;</p> <p>6-.3 undefined, write 0;</p> <p>2-.0 signal quality, 0x00-0x07 a total of 8 levels, 0x00 means the worst, 0x07 means the best.</p> <p>D27-D20: 8 Bytes communication device MAC address, low (D20) alignment.</p> <p>D19-D0: Description of the communication device in text format, up to 20 Bytes. Use hexadecimal to describe the information as the corresponding ASCII character.</p> <p>The user can refer to the DWIN example' s configuration at 22 to set 0x480 to write 0x5A 47 01 00</p> <p>0x0482 can display the 8 Bytes communication device MAC address value through the HEX variable display control</p>
Communication Device	0x490	8	User- defined	<p>Restart WiFi module is valid</p> <p>D15-D14 : The baud rate setting is reserved. Currently fixed at 921600 bps, it cannot be set.</p> <p>D13-D9: Reserved.</p> <p>D8: WiFi module switching Debug firmware 5A means valid.</p> <p>D7: D0: WiFi module type identification information</p> <p>Default "DWD100".</p>

WiFi_ Config	0x498	4		<p>D7: Writing 5A means starting the WiFi configure network, and the configure network is completed. The value is cleared to 0.</p> <p>D6: 0x5A means to start the network name and password to connect to the router (the network name and password are saved at 0x4B0)</p> <p>D7-D6, as long as it is started once, D7-D6 will be cleared at the same time after completion. The two Internet access modes cannot be started at the same time. If they are all 5A, the one-click configure network takes precedence.</p> <p>D5: Network time 5A means the screen comes with RTC (0x9C); 5B means RTC library RTC (0xF430)</p> <p>D4- D2: Reserved.</p> <p>D1: The WiFi module is automatically upgraded. 5A means enable.</p> <p>D0: Soft reset. 5A initiates reset and reset is cleared to 0.</p> <p>The user can design the configure button in the UI. Start manual configure network touch button (press to return 0x498 address write 0x005A) Start one-key configure network touch button (press to return 0x498 address write 0x5A00)</p>
Reserved	0x49C	4	All are 00	Reserved
Network Status	0x4A0	8		<p>D15-D14: WiFi version number.</p> <p>D13-D12: configure network status feedback</p> <p>00: unmatched network</p> <p>01: start configure network</p> <p>02: in the configure network</p> <p>03: configure network success</p> <p>04: configure network failure</p> <p>D11-D10: network connection status</p> <p>00: user name and password not obtained</p> <p>01: WiFi router connection is successful</p> <p>02: WiFi module self-upgrade</p> <p>03: connect to the server</p> <p>04: logged in to the server</p> <p>05: connected to the Cloud</p> <p>The user can directly display the interface variable, use the 0x4A0 address to display the WiFi version number with the data variable display control, and the 0x4A1 address uses the icon variable to make 5 small icons for displaying the communication status. The 0x4A2 address uses 6 small icons to display the network connection status.</p>
State Machine	0x4A8	4		<p>D7: state machine.</p> <p>D6: UART state machine.</p> <p>D3-D0: remain stacking space.</p>
RTC	0x4AC	4		<p>D7: 5A means the time is valid.</p> <p>D6-D0:yy:mm:dd:ww (0-6) hh:mm:ss</p>
Network information	0x4B0	32		<p>0x4B0: SSID, the end must be 0xFF.</p> <p>0x4C0: SN, the end must be 0xFF.</p> <p>Text ASCII input and display controls can be used for input and display.</p>





WiFi-10 actively reads 0x490 and other registers every 0.1s- 0.2s ( the register that DGUS issues instructions to WiFi-10).

WiFi-10 will write its status to the DGUS register every 3-5 seconds (the status of the WiFi module:0x480, 0x4A0, etc.).

After completing the configure operation on the DGUS screen or mobile app, WiFi-10 will automatically access the Internet and start running data synchronization.

The device description information is configured in the 22 initialization file 0x0800-0x09FF byte addresses corresponding contents. (The underlying program will automatically handle regardless of the 22 file initialization variable buffer function enabled or not).

Cloud platform website: <http://merchant.dwinhmi.com.cn/>

Server mapped memory debug interface website: <http://tools.dwinhmi.com.cn/>

## Chapter 6 Touch Variable Configuration (13.BIN)

The touch variable configuration is stored in the 13.BIN, which consists of touch instructions according to the control configurations.

Each touch instruction occupies a fixed storage space of 16, 32 or 48 bytes and consists of 6 parts, as shown below.

Number	Definition	Length	Definition
1	Pic_ID	2	Page ID, the high 4 bit is the audio ID selection of this button, 0 x00 means without touch voice.
2	TP_Area	8	The touch button area coordinates the upper left corner (Xs, Ys) and the lower right corner (Xe, Ye). Setting the button region outside the screen resolution simulates triggering touch-screen buttons in the system variable interface with specific key values.
3	Pic_Next	2	Target page ID after button pressing, 0xFF** indicates without page switching.
4	Pic_On	2	ID of the page where the effect picture is when the button is pressed, 0xFF* * indicates without pressing effect.
5	TP_Code	2	Touch control code: 0xFF** indicates an invalid key code. 0xFE** or 0xFD** indicates a touch button. For example, 0 xFE00 indicates the touch screen digital input is enabled.  00 is the touch control code value, which can be named by referring to the touch control code number in the 6.1 List of Touch Variables. 0xFE** function key can be set by CFG file 0x05.4 to upload or not. The function button of 0xFD** always prevents automatic uploading after variable changes. Other touch control codes are represented by ASCII. For example, 0x0031 indicates key 1.
6	TP_FUN	0/16/32	Touch control code: When TP_Code= 0xFE**, this parameter is used to describe the touch button.

## 6.1 List of Touch Variables

Number	Touch control code	Variable name	User variable length (Word)	Description
01	00	Variable Data Input	1/2/4	Input integer, fixed decimal and other data into the specified variable storage space. Pop-up keyboard transparency can be set. Support configuration touch control.
02	01	Popup Menu	1	Click to trigger a pop-up menu that returns the key code of the menu item. Popup menu transparency can be set.
03	02	Incremental Adjustment	1	Click the button to perform +/- operation on the specified variable, and set the step size and upper and lower limits. Setting the 0-1 range loop enables the column check box function.
04	03	Drag Adjustment	1	Drag the slider to achieve variable data entry. The range can be set.
05	05	Return Key Code	1	Click the button to directly return the key value to the variable. Support bit variable return. Support press time threshold setting.
06	06	ASCII Text Input	Max 127	Input text characters in ASCII or GBK Chinese characters. Cursor movement and editing are supported. You can set the (VP-1) position to store the input status and input length. ASCII input mode pop-up keyboard transparency can be set. The pop-up keyboard can be dynamically switched.
07	08	Synchrodata Return	User defined	Click the screen to return the data to the variable as specified.
08	09	Rotation Adjustment	1	Arc type drag adjustment.
09	0A	Sliding Adjustment	2	Slide the touch screen along the X or Y axis of the specified area to return the relative adjustment value in real time. With the data window indicating the display of variables, you can achieve dynamic roll-character adjustment. VP is reserved and returns data at (VP+1) position.
10	0B	Page Sliding	None	Slide the touch screen in the X-axis direction of the specified area to achieve dynamic page dragging. You can set the page switch target, area, the current page variable display will follow the drag. If there are other touch controls on the page at the same time, and the whole page (including drag and drop touch buttons) needs to be switched by gesture, you must set the touch priority of the page sliding to the highest.
11	0C	Slide Icon Sel	4	Realize icon page sliding selection with 0x07 display variable (JPEG icon panning display).
12	0D	Bit Button	1	Click button to specify bit adjustment for specified variable.

The touch configuration file (13\*.bin) cannot exceed 256Kbytes.

You can dynamically turn on, off, or modify the specified touch instruction by UART or DWIN OS access to the touch instruction access interface defined in 0x00B0 variable space to achieve complex touch functions.

## 6.2 Variable Data Input

The variable data input control can change and adjust data by pressing the control area and popping up an input keyboard.

You can achieve touch screen simulation operation by this control with 0xD4 instruction. That means when the operation is not completed and the pop-up keyboard is in non-operation state, you can use 0xD4 instruction to exit the pop-up keyboard state after a specified time.

You can also use it to input integers, fixed decimals and other data into the specified variable storage space on the current page or the pop-up keyboard. And the pop-up keyboard transparency can be set.

### 6.2.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the Control: upper left corner ( Xs, Ys), lower right corner( Xe, Ye).
0x0A	Pic_Next	2	Target switch page, 0xFF** means no page switch
0x0C	Pic_On	2	Button press effect page, 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE00 , variable data input key code.
0x10	0x FE	1	0xFE
0x11	VP	2	Variable pointer
0x13	V_Type	1	Return variable type : 0x00=2bytes: Integer: -32768 to 32767; Unsigned integer: 0 to 65535 0x01=4bytes: Long integer: -2147483648 to 2147483647 Unsigned long integer: 0 to 4294967295 0x02=* VP high byte, unsigned number: 0 to255 0x03=* VP low byte, unsigned number: 0 to255 0x04=8bytes, extra long integer: -9223372036854775808 to 9223372036854775807 0x05=Single-precision floating-point number (4 bytes)
0x14	N_Int	1	Integer digits. For example, input 1234.56, and N_ Int=0x04
0x15	N_Dot	1	Decimal digits. For example, input 1234.56, and N_ Int=0x02
0x16	(x, y)	4	Display location: right alignment, (x, y) is the upper right coordinate of the string input cursor. Undefined when using configurationkeyboard (KB_Source=0x0F)
0x1A	Color	2	Display color Undefinedwhen using configurationkeyboard (KB_Source=0x0F)
0x1C	Lib_ID	1	ASCII Font position, default 0x00 Undefinedwhen using configuration keyboard (KB_Source=0x0 F)
0x1D	Font_Hor	1	Font size 0x00 means black, otherwise it is white Undefinedwhen sing configuration keyboard (KB_Source=0x0F)
0x1E	Cusor_Color	1	Cursor color. Undefinedwhen using configuration keyboard (KB_Source=0x0 F)

0x1F	Hide_En	1	0x00: The entered text is displayed as *; other values are displayed according to the entered content.
0x20	0x FE	1	0xFE
0x21	KB_Source	1	0x00=Current page; 0x01=Other page; 0x0F= Assembly keyboard
0x22	PIC_KB	2	The page ID where the keyboard is located is valid only if KB_Source is not equal to 0x00. Assembly keyboard (KB_Source=0x0F) =assembly function file
0x24	AREA_KB	8	Only the pop-up keyboard (KB_Source=0x01) mode is valid; Keyboard area: upper left coordinate ( Xs, Ys), lower right coordinate (Xe, Ye).
0x2C	AREA_KB_Position	4	Valid for pop- up keyboard or number entry configuration keyboard. The upper- left coordinate of the keyboard display position on the current page.
0x30	0xFE	1	Fixed value 0xFE.
0x31	Limite_En	1	0xFF: Indicates that the input range limit is enabled, and the input out- of- bounds is invalid ( equivalent to cancellation);
0x32	V_min	4	Input lower limit, 4 bytes ( long or unsigned long).
0x36	V_max	4	Input upper limit, 4 bytes ( long or unsigned long).
0x3A	Return_Set	1	0x5 A: During input, load Return_ Data to the Return_ VP address to end the automatic recovery. 0x00: No data is loaded during input. Load data function: mainly used for multi- parameter entry with display variable SP (description pointer) The process is automatically marked, such as changing font color, size, enable a (bit) variable icon or invert an area. It can also be used as a marker bit of the input process to meet special requirements with DWIN_ OS development.
0x3B	Return_VP	2	The VP address where the data is loaded during entry.
0x3D	Return_Data	2	Data loaded into Return_ VP during entry.
0x3F	Layer_Gama	1	When the keyboard or the numeric input configuration keyboard pops up, the background transparency can be set with in 0x00~0xFF. 0x00 means 100% opaque.

**Note:** The valid key codes for digital input are 0x0030-0x0039, 0x002E(.), 0x002D(+/-), 0x00F0(Cancel), 0x00F1(OK), 0x00F2( Backspace).



## 6.2.2 Software Settings

**Coordinates of the upper left corner of the touch area**

**Touch area width and height**

**Can be set by default**

**Voice ID number**

Checking means that the input is completed and the data is uploaded. At the same time, the 0x05.4 bit of the CFG file needs to be written to enable the data upload, and the 0x05 bit can be written to 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on.

The display effect of processing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see sunken dark blue effect.

Can be set by default

Variable storage space user can use address range arbitrarily: 0x1000-0xFFFF  
Variable data entry and data type occupies 1/2/4 addresses. That is, non-associated control keys need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF

The number of integer digits displayed during entry.  
The number of decimal places displayed during entry.

The coordinates of the data display during entry.  
Enter the position of the upper right corner of the display area.

The size of font 0 is 4\*8-64\*128, dot matrix in X direction, the size is appropriate, and the color can be customized.

Direct display is more intuitive, and \*\*\* can be used for password input.

To call the keyboard of the current page, you need to select the current page, and to call other keyboard, you need to select other pages.

The type of touch control and display control should be the same as the type of data variable.

Variable Type	Occupies
Int (word)	1 address
Long int (double word)	2 addresses
High Byte	1 byte
Low Byte	1 byte
Extra long int(8 bytes)	4 addresses
float	2 addresses

When setting up the touch and display controls, the type of the control should be the same, otherwise the entered parameters will not be displayed correctly.

The coordinates of the upper left corner of the selected keyboard area.

It is recommended to enter the position of the upper right corner of the display area for the coordinates of the data display during the entry process.

The corresponding data keyboard page needs to be defined by the basic touch setting key value, and the key value is set under the touch attribute. Only basic touch controls can be placed on the pop-up area, and touch keys such as key value return and sliding page turning cannot be placed.

The coordinates of the lower right control of the selected keyboard area.

The coordinates of the upper right corner of the pop-up keyboard on the current page. Too far to the right or incomplete display of the keyboard in the lower right corner.  
The pop-up keyboard is similar to the transparency of frosted glass, with 0 being opaque.

For example, after checking here, the data can only be entered in the range of -100 to 100.

It is mainly used to combine with the SP (description pointer) modification to the variable display to realize the automatic labeling for the multi-parameter input process.  
For example, modify the font color, size, start a (bit) variable icon or area inversion.  
0x8003 is the data variable display SP 0x8000 address offset by 3 bits, used to change the data color.  
2047 is the color value 0x07FF (Fluorescent green). It needs to be converted into decimal system, if there is no requirement, it can be unchecked by default.  
For example, the data value loaded with the data address determines whether the keyboard is to the input state.



## 6.3 Popup Menu

### 6.3.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic-Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE01 , popup window key code.
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	VP_Mode	1	0x00 : the returned key code is saved to VP ( integer) 0x01: the returned key code is saved to high byte of the VP(VP_H) 0x02: the returned key code is saved to low byte of the VP(VP_L) 0x10-0 x1F: Write the lowest bit of the returned key code ( 1bit) to specific bit of VP(0x10 corresponds to VP.0; 0X1F corresponds to VP.F)
0x14	Pic_Menu	2	Page ID of the menu
0x16	Area_Menu	8	Menu area: upper left coordinate (Xs, Ys), lower right coordinate (Xe, Ye).
0x1E	Menu_Position_x	2	Upper left corner x- coordinate of the current page
0x20	0xFE	1	0xFE
0x21	Menu_Position_Y	2	Upper left corner y- coordinate of the current page
0x23	Translucent	1	The transparency setting. The background transparency can be set within 0x00~ 0xFF. 0x00 means 100% opaque.
0x24	NULL	12	Write 0x00

### 6.3.2 Software Settings

Open DGUS, and click touch control-popup menu. Set the control touch area, and configure functions in the menu on the right.

**Coordinates of the upper left corner of the touch area**

**Touch area width and height**

**Can be set by default**

**Voice ID number**

Checking means that the input is completed and the data is uploaded. At the same time, the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. The 0x05 bit can be written 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on

The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.

Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF  
The pop-up menu occupies 1 space address. That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF

Write by word length: write the entire variable address. Write bit control: use bit variable; write high and low words;  
Section: write system variables such as backlight will be used.

The corresponding pop-up menu page needs to be defined by the basic touch setting key code, the key code range is 0x0000-0x00FF, among which 0x00FF is the cancel key code. On the pop-up area, you can only use basic touch controls, and you can't press the button to return, and you can't slide to turn pages, otherwise the keys will be invalid.

The coordinates of the upper left corner of the pop-up menu area.

The coordinates of the lower right corner of the pop-up menu area.

The coordinates of the upper-left corner of the pop-up menu's display position on the current page.

The pop-up area is similar to the transparency of the glass texture, and 0 is opaque.

As shown in the figure, the basic touch control (0x0000-0x00FE) on "China", "USA" and "Russia" will return to the address of the variable pointed to by the pop-up menu control when clicked, and the key code of the "x" cancel button is set to 0x00FF, which will not return the value when clicked and will exit the menu selection.



Menu\_Position\_X: The X coordinate of the upper-left corner of the current page display position of the menu.

Menu\_Position\_Y: The Y coordinate of the upper-left corner of the current page display position of the menu.



Area\_Menu: Coordinate of the upper-left corner of the popup menu  
Boxes the area inside the dotted line.

Area\_Menu: The coordinates of the lower-right corner of the popup menu.

## 6.4 Incremental Adjustment

### 6.4.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner ( Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect
0x0E	TP_Code	2	0xFE02, incremental adjustment key code
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer, returned data is defined by VP_Mode
0x13	VP_Mode	1	0x00: Adjust the VP (integer) 0x01: Adjust high byte of the VP (1-byte unsigned integer, VP_H) 0x02: Adjust low byte of the VP (1-byte unsigned integer, VP_L) 0x10-0x1F: Adjust the specific bit of VP (0x10 corresponds to VP.0, 0x1F corresponds to VP.F), range:0- 1.
0x14	Adj_Mode	1	0x00= - - others=+
0x15	Return_Mode	1	0x00: Disabled. The value stops changing when max. or min. values are reached. Other Values: Enabled. The value loops around the range when it reaches max.
0x16	Adj_Step	2	0x0000-0x7FFF
0x18	V_Min	2	Min value accepted by the control: 2 -bytes integer(When VP_Mode is 0x01 or 0x02, only low byte is effective)
0x1A	V_Max	2	Max value accepted by the control: 2 -bytes integer(When VP_Mode is 0x01 or 0x02, only low byte is effective)
0x1C	Key_Mode	1	0x00: Continuous. The value is changed while the user hold sit. 0x01: The value is changed once per touch.
0x1D	NULL	3	Write 0x00

## 6.4.2 Software Settings

Open DGUS, click touch control - incremental adjustment. Then set the control touch area, and configure the functions in the menu on the right.

Incremental adjustment	
X 272 Y 25	Coordinates of the upper left corner of the touch area
W 76 H 18	Touch area width and height
<input type="checkbox"/> Key Ct Value(0x) 0	Can be set by default
<input type="checkbox"/> Audio ID 0	Voice ID number
Name Incremental Adjustment	
<input type="checkbox"/> Data auto-uploading	Checking means that the input is completed and the data is uploaded. At the same time, the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. The 0x05 bit can be written 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on.
Button effect: -1 set	The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.
<input type="checkbox"/> No button effect	
VP (0x) 5012	Variable storage space users an use address range arbitrarily: 0x1000-0xFFFF. The pop-up menu occupies 1 space address. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.
<input checked="" type="radio"/> Int <input type="radio"/> Bit	
<input type="radio"/> High Byte <input type="radio"/> Low Byte	Write by word length: write the entire variable address. Write bit control: use bit variable; write high and low words. Section: Write system variables such as backlight will be used.
Adjust method ++	When pressed, it is "+" to increase, Or "-" to decrease.
Over limit Operation Cycle	Cycle adjustment: After the data reaches the Max. or Min. value, you can continue to adjust. Stop adjustment: The adjustment will stop when the data reaches the Max. or Min. value.
Adjusting step length 1	For example, if the step size is set to 2, the blue will increase by 2 if you click it once, such as 2/4/6/8 change. The upper and lower limits are the Max. and Min. data ranges. The upper and lower limits are set to 0/1 and can be multiple-selected, 0 is off and 1 is on.
Lower limit 0	
Upper limit 1	
Touch effect	Adjust once: Press and hold the touch data to change only once. Continuous adjustment: Press and hold the touch data to continuously change.
Constant Setting	



## 6.5 Drag Adjustment

Drag adjustment is to change and adjust the data pattern by dragging the slider.

The advantage is that it is intuitive, fast, and the parameters do not cross the boundary.


In combination with the "Data Variables" control, the data can be dragged for precise display and the scale range can be set.

### 6.5.1 Instruction Storage Format

Address	Definition	Length	Description
0x00	Pic_ID	2	Page ID.
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect
0x0E	TP_Code	2	0xFE03
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer.
0x13	Adj_Mode	1	<p>The high 4 bit defines the data return format:</p> <p>0x0*= Adjust VP word address ( integer number);</p> <p>0x1*= Adjust the high byte address of the VP word address (1byte unsigned number, VP_H);</p> <p>0x2* = Adjust the low byte address of the VP word address (1byte unsigned number, VP_L).</p> <p>The low 4 bit defines the drag mode:</p> <p>0x*0=horizontal drag; 0x*1=longitudinal drag.</p>
0x14	Area_Adj	8	Effective adjustment area: ( Xs, Ys) (Xe, Ye), which must be the same as the touch area.
0x1C	V_Begin	2	The return value corresponding to the starting position, an integer.
0x1E	V_End	2	The return value corresponding to the end position, an integer.



## 6.5.2 Software Settings

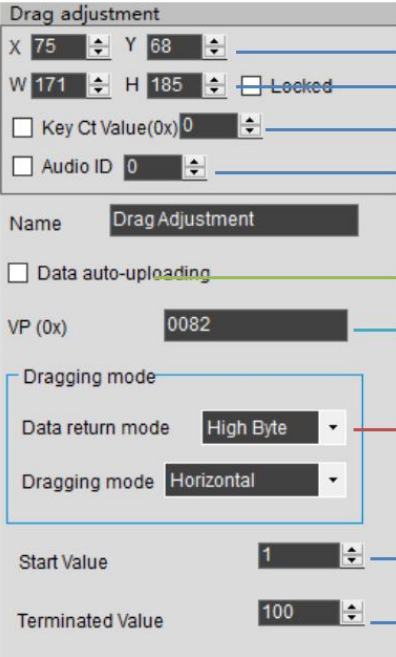

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

Checking means that the input is completed to upload the data, and the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. Bit 0x05 can be write as 0x38, which means loading 22 initial value files, uploading data, and turning on touch audio.

Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF  
The pop-up menu occupies 1 space address. That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF.

Write by word length: write the entire variable address.  
Write bit control: use of bit variables.  
Write high and low bytes: it will be used for writing system variables such as writing backlight.  
Pointing to the high of 0x0082 address here is used to drag to adjust the height of brightness.

The min. and max. values of the adjusted data are both 0 and cannot be dragged.

## 6.6 Return Key Code

### 6.6.1 Instruction Storage Format

The return key code control is to return the key value to the variable by pressing the control area, and supports the return of bit variables. Users can perform corresponding logical operations based on the returned key values.

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner (Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE05
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	TP_Mode	1	0x00: the returned key code is saved to VP (integer) 0x01: the returned key code is saved to high byte of the VP(VP_H) 0x02: the returned key code is saved to low byte of the VP(VP_L) 0x10-0x1F: Write the lowest bit of the returned key code (1bit) to specific bit of VP(0x10 corresponds to VP.0; 0X1F corresponds to VP.F)
0x14	Key_Code	2	Returned key code
0x16	Hold_Time	1	Unit of 0.1s. There will be a response when the press time exceed the Hold_Time.
0x17	NULL	10	Write 0x00

## 6.6.2 Software Settings

Open DGUS, and click touch control – return key code. Then set the control area, and configure the button effect, page switching, key value, variable address, etc.

X 108 Y 69	Coordinates of the upper left corner of the touch area
W 175 H 198 Locked	Touch area width and height
<input type="checkbox"/> Key Ct Value(0x) 0	Can be set by default
<input type="checkbox"/> Audio ID 0	Voice ID number
Name Return Key code	
<input type="checkbox"/> Data auto-uploading	Checking means that the input is completed and the data is uploaded. At the same time, the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. The 0x05 bit can be written 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on
Button effect: -1 set	The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.
<input type="checkbox"/> No button effect	
Page switching: 2 set	The ID of the page that needs to be switched, and the key value can also be uploaded when the page is switched.
<input type="checkbox"/> No page switching	
key value(0x) 0x 0001 Set	The key value data to be returned. the key value range: 0x0000-0xFFFF, the master executes the corresponding operation according to the returned key value.
Hold Time(Unit:0.1s): 50	For example, the pressing time is set to 50*0.1=5 seconds, that is, the control needs to keep pressing for 5 seconds before returning to the 0x0001 key value, 5A A5 06 83 5436 01 0001. Switching the page to lift and execute.
VP (0x) 5436	Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF Press the key to return to occupy 1 space address. That is, non-associated key addresses need to be spaced apart. The same address can be set with different key values, such as 0x5436 address key value can be set 0001, 0002, 0003 system variable interface address range: 0x0000-0x0FFF (such as page switching address 0x0084)
<input checked="" type="radio"/> Int <input type="radio"/> Bit	Write by word length: write the entire variable address.
<input type="radio"/> High Byte <input type="radio"/> Low byte	Write bit control: use of bit variables. Write high and low bytes: it will be used for writing system variables such as writing backlight.

Return data format:

5AA5 06 83 5436 01 0001

0x5A: 5A Frame header;

0x06: Data length;

0x83: Read instruction;

0x5436: VP;

0x01: word length of the returned data;

0x0001: returned key value of 0001.

## 6.7 Text Input

Text Input includes ASCII and GBK Chinese characters. You can move the cursor and edit during input. The input status and input length saved at (VP-1) address can be set.

The transparency of ASCII input keyboard is adjustable.

The keyboard key code is as the table below.

Key codes are the key values defined for basic keyboard operations. The lower byte of the two-byte key code indicates the normal key code, and the higher byte indicates the uppercase key code.

For example, 0x61 corresponds to a, 0x41 to A, and 0x31 to 1.

Besides, the key code must be smaller than 0x80 (ASCII code). 0x0D key code input will be automatically converted to 0x0D 0x0A; 0x00 and 0xFF key codes are disabled.

Key Code	Normal	Capital	Key Code	Normal	Capital	Key Code	Normal	Capital	Key Code	Normal	Capital
0x7E60	`	~	0x5171	q	Q	0x4161	a	A	0x5A7A	z	Z
0x2131	1	!	0x5777	w	W	0x5373	s	S	0x5878	s	S
0x4032	2	@	0x4565	e	E	0x4464	d	D	0x4363	c	C
0x2333	3	#	0x5272	r	R	0x4666	f	F	0x5676	v	V
0x2434	4	\$	0x5474	t	T	0x4767	g	G	0x4262	b	B
0x2535	5	%	0x5979	y	Y	0x4868	h	H	0x4E6E	n	N
0x5E36	6	^	0x5575	u	U	0x4A6A	j	J	0x4D6D	m	M
0x2637	7	&	0x4969	i	I	0x4B6B	k	K	0x3C2C	,	<
0x2A38	8	*	0x4F6F	o	O	0x4C6C	l	L	0x3E2E	.	>
0x2839	9	(	0x5070	p	P	0x3A3B	;	:	0x3F2F	/	?
0x2930	0	)	0x7B5B	[	{	0x2227	,	“	0x2020	SP	SP
0x5F2D	-	_	0x7D5D	]	}	0x0D0D	Enter	Enter			
0x2B30	=	+	0x7C5C	\							

Table 6.7 Keyboard function key code definition

Key Code	Function	Description
0x00F0	Cancel	Cancel input code return, not affecting the variable data.
0x00F1	Return	Confirm input code return, and the input text is saved to the specified VP.
0x00F2	Backspace	Delete one character(backspace) .
0x00F3	Delete	Delete one character backwards.
0x00F4	CapsLock	Caps lock. If enabled, the corresponding button must define the effect of the button press, i. e. there must be a press effect page in the project .
0x00F7	Left	Move the cursor forward by one character; it is used to turn pages in GBK Chinese character input.
0x00F8	Right	Move the cursor back by one character; it is used to turn pages in GBK Chinese character input.
0x00F9	Picture_KB_Change	Used to switch between different keyboard backgrounds in order when they are not on the current page.
0x00FA		0x00F9: 2 background pages, PIC_KB and PIC_KB+ 1. 0x00FA: 3 background pages, PIC_KB, PIC_KB+ 1, PIC_KB+2.

In case of using the keyboard (keycode in the 0x4F register) for text input, if you use the CapsLock key, please define the button animation in the area where you want to indicate "CapsLock"; after this, when you press the CapsLock key, the area icon of " CapsLock" will be displayed on the screen automatically.

## 6.7.1 ASCII Text Input

### 6.7.1.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Control area: upper left corner ( Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE06
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	VP_Len_Max	1	Max text length, in words (two characters for each word). Range: [0x01,0x7B]. When the text is saved in the specific VP, 0xFFFF will be added as terminator at the ending of the text. Thus the max variable space is actually VP_Len_Max+1.
0x14	Scan_Mode	1	Input mode. 0x00: re-input; 0x01: modify existing text.
0x15	Lib_ID	1	Index in the FLASH memory of the ASCII Font to use. 0x00=default.
0x16	Font_Hor	1	Font width, in pixels.
0x17	Font_Ver	1	Font height, in pixels. When "Lib_ID" = 0x00 , it must be twice the width.
0x18	Cursor_Color	1	Color of the input cursor. 0x00: Black Other Values: White.
0x19	Color	2	Text color.
0x1B	Scan_Area_Start	4	Upper-left coordinates of the area where the text will be displayed: (Xs, Ys).
0x1F	Scan_Return_Mode	1	0x55= save the input end tag and valid data length at the * (vp-1) position. * (vp-1) high byte, input end mark: 0x5A means input end, 0x00 means idle or input state. * (vp-1) low byte, effective input data length, in byte. 0x00= does not return the input end tag and data length.
0x20	0xFE	1	0x FE
0x21	Scan_Area_End	4	Lower-right coordinates of the area where the text will be displayed: (Xe, Ye).
0x25	KB_Source	1	Keyboard image page settings. 0x00: Keyboard on current page. Other Values: Keyboard on another page.



<b>0x26</b>	PIC_KB	2	The page where the keyboard is located ( valid when the keyboard is not on the current page)
<b>0x28</b>	Area_KB	8	Keyboard area coordinates: upper left corner ( Xs, Ys), lower right corner( Xe, Ye).
<b>0x30</b>	0xFE	1	0xFE
<b>0x31</b>	AREA_KB_Position	4	Upper- left coordinates of the keyboard. ( valid when the keyboard is not on the current page)
<b>0x35</b>	Display_EN	1	0x00= Normal display; 0x01=Characters displayed as asterisks(*)
<b>0x36</b>	Layer_Gama	1	The background transparency can be set within 0x00 ~ 0xFF. 0 x00 means 100% opaque.
<b>0x37</b>	NULL	9	Write 0x00



### 6.7.1.2 Software Setting

ASCII Text Input

X 140 Y 64

W 201 H 169 ☐ Locked

☐ Key Ct Value(0x) 0

☐ Audio ID 0

Name ASCII Text Input

☐ Data auto-uploading

Button effect: -1 set

☐ No button effect

Page switching: -1 set

☐ No page switching

VP (0x) 5240

Text Length 2

Input Mode Re-input

Font Lib\_ID 50

Font Width 24 4-255

Font Height 48 4-255

Cursor color Black

Font Color 0000

☐ Upload Value as typing

Input display area 56 191 669 294 Set

Display Mode Direct display

Keyboard location Other pages

Keyboard setting

Page ID 1

Keyboard area 15 98 470 401

Show location 15 98 Set

Background transparency 0

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

Checking means that the input is completed and the data is uploaded. At this same time, the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. The 0x05 bit can be written 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on.

The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.

The ID of the switched page can be set by default.

Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF. According to the input character length occupies the corresponding length address, the max. is 127 words(word). The VP\_Len\_Max+1 address is occupied as the 0xFFFF terminator, therefore, one more address needs to be reserved. For example, 5 addresses are actually needed, and because the 0xFFFF terminator occupies one more address, 6 addresses need to be reserved. System variable interface address range: 0x0000-0x0FFF (if the page switching address is 0x0084). For example, 5 addresses are actually needed, and because the 0xFFFF terminator occupies one more address, 6 addresses need to be reserved.

Max. length of the text variable, number of words(not bytes), range 0x01-0x7F

Re-enter: When entering again, the previously entered characters will be cleared. Modify the text: When entering again, the previously entered characters still exist, and the previously entered characters needed to be deleted manually.

ASCII characters use font size 0 by default and the X,Y dot matrix double relationship.

Cursor black or white

The display color of the text during the input process.

Coordinates of the upper left corner of the called keyboard area: (Xs,Ys).

Enter the coordinates of the upper left corner of the display area(Xs, Ys)  
Enter the coordinates for the lower right corner of the display area(Xs,Ys).

Coordinates of the lower right corner of the called keyboard area "Xs,Ys".

The called keyboard displays the coordinates in the upper left corner of the current page.

Keycode

Keycode	Description
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
0	0
-	-
=	=
~	~
!	!
@	@
#	#
\$	\$
%	%
&	&
*	*
(	(
)	)
_	_
+	+
Backspace	Backspace
Space	Space
Enter	Enter
Cancel	Cancel
Return	Return
CapsLock	CapsLock
Delete	Delete
Left	Left
Right	Right
Backspace	Backspace

Def Keycode 0000 Add

Description

Save Select Cancel

键值(0x) 完全按键定义 0x 5070 Set

The called keyboard page uses basic touch control to define the key value. Note that the key value of data such as 1 should be set to 0x2131. You can check the keyboard, refer to the routine, or refer to the ASCII key code table setting.

## 6.7.2 GBK Input

GBK input is used to input Chinese character text.

Open DGUS, and click touch control - GBK input. Then set the control area, and configure functions in the menu on the right.

GBK input can be combined with the text display control to display entered characters.

### 6.7.2.1 Instruction Storage Format

Address	Definition	Length (byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner ( Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect
0x0E	TP_Code	2	0xFE06 , GBK input key code.
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	VP_Len_Max	1	Max text length, in words (two characters for each word). Range: [0x01,0x7B]. When the text is saved in the specific VP, it will add the 0xFFFF as terminator automatically at the ending of the text. Thus the variable space is actually VP_Len_Max+1.
0x14	Scan_Mode	1	Input mode. 0x00: re-input, 0x01: modify existing text.
0x15	Lib_GBK1	1	Index in the FLASH memory of the GBK Font to use after entry. 0x00= default.
0x16	Lib_GBK2	1	Index in the FLASH memory of the GBK Font to use before entry.
0x17	Font_Scale1	1	Lib_GBK1 font size, lattice number
0x18	Font_Scale2	1	Lib_GBK2 font size, lattice number
0x19	Cursor_Color	1	Color of the input cursor. 0x00: Black Other Values: White
0x1A	Color0	2	Text color after entry
0x1C	Color1	2	Text color during entry
0x1E	PY_Display_Mode	1	The display of pinyin hints and corresponding Chinese characters during entry. * 0x00 = pinyin hints are displayed on the top and the corresponding Chinese characters are displayed on a separate line at the bottom. Pinyin hints and Chinese characters are displayed left- aligned, with Scan_Dis line spacing. * 0x01 = Pinyin hints are displayed on the left, and the corresponding Chinese characters are displayed on the right. The starting display x position of the Chinese character is: Scan1_Area_Start+ 3x Font_Scale2+ Scan_Dis.

0x1F	Scan_Return_Mode	1	0xAA=Save the input end mark and valid data length at *( VP-1). *(VP-1) high byte, end of input mark: 0x5A means end of input, 0x00 means input is still in progress. * (VP-1) low byte, valid input data length in byte. * 0xFF= Not return the input end mark and data length.
0x20	0xFE	1	0xFE
0x21	Scan0_Area_Start	4	Upper- left coordinates of the area where the text will be displayed: ( Xs, Ys).
0x25	Scan0_Area_End	4	Lower- right coordinates of the area where the text will be displayed: ( Xe, Ye).
0x29	Scan1_Area_Start	4	Coordinates of the upper left corner of the text display area of the pinyin prompt during entry.
0x2D	Scan_Dis	1	The spacing of each character displayed during entry. A maximum of 8 characters per line can be displayed.
0x2E	0x00	1	0x00
0x2F	KB_Source	1	Keyboard image page settings. 0x00: Keyboard on current page. Other Values: Keyboard on another page.
0x30	0xFE	1	0xFE
0x31	PIC_KB	2	The page where the keyboard is located ( valid when the keyboard is not on the current page) .
0x33	Area_KB	8	Keyboard area coordinates: upper left corner ( Xs, Ys), lower right corner( Xe, Ye).
0x3B	Area_KB_Position	4	Upper- left coordinates of the keyboard. ( valid when the keyboard is not on the current page)
0x3F	Scan_Mode	1	0x02=pinyin input method 0x03=phonetic input method.

#### Note

Pinyin " bd" corresponds to all GBK- coded full- width punctuation entry;

DWIN' s pre-installed 0# font library contains all ASCII characters of 4\*8--64\*128dot matrix.

The key code (low byte) of the phonetic input method is defined as below (the phonetic input method is mainly used in Taiwan).



### 6.7.2.2 Software Setting

**GBK Input**

X: 160 Y: 48  
W: 145 H: 190 ☐ Locked  
☐ Key Ct Value(0x) 0  
☐ Audio ID 0

Name: GBK Input  
☐ Auto upload

Button Effect: -1 ☐ No Button Effect

Page Switching: -1 ☐ No Page Switching

VP: 5020

Text Length: 100

Entry Mode: Re-entry

Display Font: 23

Dot Matrix Size: 24 See: 4-25

Text Color: [Color Picker]

Display Font During Entry: 23

Dot Matrix Size: 24 4-255

Text Color: [Color Picker]

Display Method: Pinyin hints are shown ab

Cursor Color: White

☒ Input Status Return

Input Display Area: 27, 116, 445, 145

Pinyin Display Position: 285, 116

Spacing: 1

Keyboard Position: Other Page

**Keyboard**

On the Page: 1

Keyboard Area: 14, 100, 471, 402

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

Checking means that the input is completed and the data is uploaded. At the same time, the 0x05.4 bit of the CFG file is required to write 1 to start the data upload. The 0x05 bit can be written 0x38, which means that the 22 initial value file is loaded, the data is uploaded, and the touch sound is turned on.

The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.

Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF. According to the input character length occupies the corresponding length address, the max. is 127 words(word). The VP\_Len\_Max+1 address is occupied as the 0xFFFF terminator; therefore, one more address needs to be reserved.

For example, 5 addresses are actually needed, and because the 0xFFFF terminator occupies one more address, 6 addresses need to be reserved. The VP\_1 address is used to save the input page and effective data length, so the VP\_1 address needs to be reserved.

System variable interface address range: 0x1111-0xFFFF

Max. length of text variable, number of words(not bytes), range 0x01-0x7B

Re-enter: When entering again, the previously entered characters will be cleared. Modify the text: When entering again, the previously entered characters still exist, and the previously entered characters need to be deleted manually.

Chinese character library ID, set according to the dot matrix size at the time of generation. For example, here is the 23rd font, 24\*24 dot matrix is fixed size, other dot matrix cannot be set, otherwise the code is garbled.

Chinese character library ID, set according to the dot matrix size at the time of generation. For example, here is the 23rd font, 24\*24 dot matrix is fixed size, other dot matrix cannot be set, otherwise the code is garbled.

Area\_KB Upper left corner

Area\_KB Lower right

Scan0  
Scan1\_Area\_Start  
Upper left corner

Scan0\_Area\_End

The coordinates of the upper left corner can be 14, 100



**Keycode**

Keycode	Description
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
0	0
-	-
=	=
~	~
!	!
@	@
#	#
\$	\$
%	%
^	^
&	&
*	*
(	(
)	)
_	_
+	+
Backspace	Backspace
Tab	Tab
Q	Q
W	W
E	E
R	R
T	T
Y	Y
U	U
I	I
O	O
P	P
[	[
]	]
\	\
/	/
Space	Space
Enter	Enter
Cancel	Cancel
Return	Return
CapsLock	CapsLock
Delete	Delete
Left	Left
Right	Right
Backspace	Backspace

Def Keycode: 0000

Description:

Save

键值(00): 完全按键定义  
0x: 5070

The basic touch of the called keyboard page is to define the key value, Note that the key value of the data such as 1 should be set to 0x2131. You can check the keyboard, refer to the routine, or refer to the ASCII key code table setting.

The coordinates of the upper left corner of the called keyboard displayed on the current page.

## 6.8 Synchrodata Return

There are three states of synchrodata return control: first pressing, continuous pressing, and releasing. Click the touch screen to return the data to the variable according to the regulations.

### 6.8.1 Instruction Storage Format

The synchrodata return control is to click the screen and return data to the variable or UART. The T5L\_DGUS II screen has only 01 mode, which can replace the 02 mode of DGUS screen . New functions: frame header + data length + 83 and VP address + length + DATA.


You can set VP1 S and VP1 T in DGUS.

VP1 S can be set as the 22 file address, and VP1T refers to the VP address after the 83 instruction.

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner ( Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect
0x0E	TP_Code	2	0xFE08 , synchrodata return key code.
0x10	0xFE	1	0xFE
0x11	TP_On_Mode	1	Data return mode for the first touch. 0x00= no data is returned 0x01= read *VP2S pointing to LEN2 length data sent in DGUS serial protocol format to serial 2.
0x12	VP1 S	2	Read the data in the address when first pressing.
0x14	VP1 T	2	Write the data to the address when first pressing.
0x16	0x00	1	0x00
0x17	LEN1	1	Return data length in bytes. When TP_On_Mode=0x01, LEN1 must be even.
0x18	0xFE	1	0xFE
0x19	TP_On_Continue_Mode	1	When the screen is continuously pressed, data return mode: 0x00= no data return 0x01 = read the LEN2 length data pointed to by * VP2 S and send it to UART 2 in DGUS serial port protocol format.
0x1A	VP2 S	2	Read the data in the address when continuous pressing.
0x1C	VP2 T	2	Write the data in the address when continuous pressing.
0x1E	0x00	1	0x00
0x1F	LEN2	1	Return data length in bytes. When TP_On_Continuous_Mode=0 x01, LEN2 must be even.
0x20	0xFE	1	0xFE
0x21	TP_OFF_Mode	1	When the screen is released, data return mode: 0x00= no data return 0x01= read the LEN2 length data pointed to by *VP2S and send it to UART2 in DGUS serial port protocol format.
0x22	VP3 S	2	Read the data in the address when the screen is released.
0x24	VP3 T	2	Write the data in the address when the screen is released.

<b>0x26</b>	0x00	1	0x00
<b>0x27</b>	LEN3	1	Returned data length in bytes. When TP_OFF_Mode= 0x01 , LEN3 must be even.
<b>0x28</b>	0x00	8	Reserved. Write 0x00

The three states of touch screen pressing are as below.

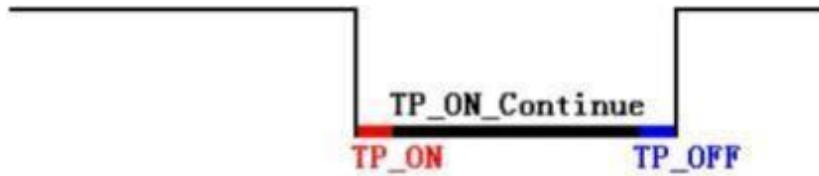

## 6.8.2 Software Setting

**Synchrodata return**

X 184 Y 195  
W 134 H 154 ☐ Locked  
☐ Key Ct Value(0x) 0  
☐ Audio ID 0

Name **Synchrodata return**

Button effect:  
-1 set  
☐ No button effect

Page switching:  
-1 set  
☐ No page switching

First press  
Mode 0x01  
VP1S(0x) 5610  
VP1T(0x) 5600  
Data length 2  
**Unit: byte**

Continuous pressing  
Mode 0x01  
VP2S(0x) 5620  
VP2T(0x) 5600  
Data length 2  
**Unit: byte**

Loosen pressing  
Mode 0x01  
VP3S(0x) 5630  
VP3T(0x) 5600  
Data length 2  
**Unit: byte**

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

The display effect of pressing the pressing area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.

Page switching ID, can be set by default.

0x00: No data is returned

0x01: Read the LEN1 byte length data pointed to by the \*VP1S address to \*VP1T. At the same time, the data is returned to the serial port.

0x02,0x03 mode T5/T5L setting is invalid.

For example, the first time pressing/continuous pressing/releasing the pressing returns to 0x0001/0x0002/0x0003 different data settings; the configuration file needs to be enabled for automatic data upload.  
The first time the button is pressed, the 2-byte data of the 0x5610 address is given to the 0x5600 address.  
Finally, write 0x0001 in the starting address of the 22 file 0xAC20 (addressing 0x5610 double address, because the 22 file is in bytes and the variable address is in the unit of word length). In this way, the first press can return to 5A A5 06 83 0001 0001

Press the button continuously to give the 2-byte data of the 0x5620 address to the 0x5600 address.  
Finally, write 0x0002 in the starting address of the 22 file 0xAC40 (addressing 0x5620 double address, because the 22 file is in bytes, and the variable is in the unit of word length). In this way, the first press can return to 5A A5 06 83 5601 0002.

Release the button to give the 2-byte data of the 0x5630 address to the 0x5600 address.  
Finally, write 0x0003 in the starting address of the 22 file 0xAC60 (addressing 0x5630 double address, because the 22 file is in bytes, and the variable address is in the unit of word length). In this way, the first press can return to 5A A5 06 83 5601 0003.



## 6.9 Rotation Adjustment

The rotation adjustment realizes variable data input by turning the knob, and can realize arc type drag adjustment.

### 6.9.1 Instruction Storage Format

Address	Definition	Length (byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner ( Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE09 , rotation adjustment key code.
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	Data_Format	1	0x00: Adjust the VP(integer) 0x01: Adjust high byte of the VP( 1-byte unsigned integer, VP_H) 0x02: Adjust low byte of the VP( 1-byte unsigned integer, VP_L)
0x14	(X, Y)	4	Center coordinate
0x18	R0	2	Inner diameter
0x1A	R1	2	Outer diameter
0x1C	A0	2	Start angle, range from 0 to 719, unit 0.5° .
0x1E	V_Begin	2	Value for start angle, integer.
0x20	0xFE	1	0xFE
0x21	A1	2	End angle, range from 0 to 719,unit 0.5°
0x23	V_End	2	Value for end angle, integer.

[ Note] The rotation adjustment needs to be used with the icon rotation control", and it is always assumed to be clockwise.

## 6.10.2 Software Setting Instructions

**Rotation adjustment**

X 250 Y 34

W 93 H 20 ☐ Locked

☐ Key Ct Value(0x) 0

☐ Audio ID 0

Name **Rotation adjustment**

Button effect:  
-1 set

☐ No button effect

Page switching:  
-1 set

☐ No page switching

VP (0x) 543A

Data format 0x00 (integer)

Center coordinate 361 350

Set

R0(inner diameter) 100

R1(outer diameter) 200

A0(start angle) 0

Return value 0

A1(end angle) 720

Return value 720

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

The display effect of pressing the touch area. For example, the current button is blue, and the button on the button effect page is dark blue. Press the button to see the sunken dark blue effect.


Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF. The pop-up menu occupies 1 space address. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFFF.

Integer: Write entire variable address. Write high and low bytes: it will be used for writing system variables such as writing backlight.

Click to set the coordinates of the center of the circle. The touch area can be drawn to be tangent to the circle.

The rotating icon is made as shown in the figure. After the black background is filtered, only the white pointer area will be displayed.

As shown:  
R0 inner diameter=453-353  
R1 outer diameter=553-353  
A0: The starting angle of the adjustment area, 0-719, the unit is 0.5. A1: The end angle of the adjustment area, 1-720, the unit is 0.5.

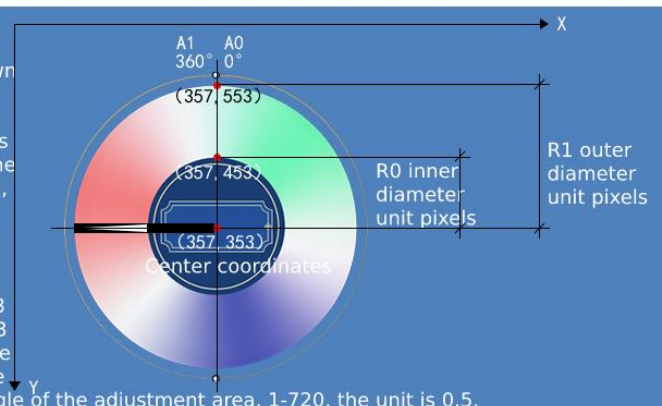

## 6.10 Sliding Adjustment

### 6.10.1 Instruction Storage Format

Address	Definition	Length (byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE0A, sliding adjustment.
0x10	0xFE	1	0xFE
0x11	*VP	2	Variable pointer, return adjustment data. * VP reserved: *VP+1 return data: High byte: adjustment direction. 0x00= increase; 0xFF=decrease Low byte: adjustment size.
0x13	Adj_Mode	1	0x00 horizontal; 0x01 vertical.
0x14	Step_Dis	1	Sensitivity; range: 0x01-0xFF.

### 6.10.2 Software Setting

Sliding adjustment

X 146 Y 107  
W 194 H 212 ☐ Locked  
☐ Key Ct Value(0x) 0  
☐ Audio ID 0

Name Sliding adjustment

☒ Data automatic upload

VP (0x) 5652

Slide mode Lateral sliding

Sensitivity ( 1 is the highest) 10

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF. Swipe gesture adjustment occupies 2 addresses, the VP address is reserved, and the returned data is in (VP+1) position. System variable interface address range: 0x1000-0x0FFF.

Sliding vertically or horizontally, vertical is recommended

The speed when the data is sliding, 1 is the highest sensitivity.

-1

1

-2

2

-3

3

-4

4

-5

5

## 6.11 Page Sliding

Slide the touch screen on the X- axis direction of the specified area to realize the dynamic dragging of the page. You can set the target and area of page sliding, and the variable display of the current page will follow and drag.

If there are other touch buttons on the page at the same time, and the whole page (including the touch buttons) needs to be switched by gesture, the touch priority of the page sliding must be set to the highest.

### 6.11.1 Instruction Storage Format

Address	Definition	Length (byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the control: upper left corner ( Xs, Ys), lower right corner (Xe, Ye).
0x0A	Pic_Next	2	Switch target page. 0xFF** means no page switch.
0x0C	Pic_On	2	Button press effect page. 0xFF** means no button press effect.
0x0E	TP_Code	2	0xFE0B, page sliding key code.
0x10	0xFE	1	0xFE
0x11	Pic_Front	2	Last page, 0xFF**= none.
0x13	Pic_Next	2	Next page, 0xFF**=none.
0x15	Pic_Area	4	( Ys, Ye) defines the area valid for page sliding in the Y- axis direction.
0x19	Push_Speed_Set	1	Response time, range :0x01-0xFF in 40 ms.
0x1A	Push_Dis_Set	2	Response sliding minimum space in X coordinates.
0x1C	FB_En	1	0x00=no upload ; Others= upload page ID.
0x1D	End_Carton_Speed	1	0x00=end without animation ; Animation speed at the end of the slide, in pixels/DGUS cycle. Recommended value is 1/20 of the horizontal resolution.

## 6.11.2 Software Setting Instructions

**Page sliding**

X  Y

W  H  ☐ Locked

☐ Key Ct Value(0x)

☐ Audio ID

Name

**Previous page:**

☐ No previous page

**Next page:**

☐ No next page

**Page sensitivity**

Time

Distance

Sliding mode

**End animation settings**

End animation speed

Description:  
0x00: End no animation;  
other values: unit of pixels divided by  
DGUS period, recommended value is  
horizontal resolution divided by 20

Coordinates of the upper left corner of the touch area

Touch area width and height

Can be set by default

Voice ID number

When swiping to the right, a new page appears on the left, for example, the middle page is page 0, and the previous page is page 1.

When swiping to the right, a new page appears on the left, for example, the middle page is page 0, and the next page is page 2.

It is judged that the page is turned after pressing the finger for a certain period of time. Setting value\*40ms, the highest sensitivity is 100ms.

When the lateral sliding distance of the finger exceeds a certain value, it is judged to be a page turning. The max. sensitivity is 50 pixels.

When you slide to turn the page, there will be on and ease-out effect, and the animation speed is controllable.  
The unit is pixel/DGUS period, and the recommended value is horizontal resolution /20.  
The setting value 00 means that no animation ends, compatible with the previous mode.

## 6.12 Slide Icon Selection

Sliding icon selection cooperates with icon page trans (JPEG icon panning display) to realize icon page sliding selection.

Steps:

- (1) Arrange the icons (program or menu index) to be used on the JPEG images with a resolution less than 4079\*4079 (no more than 256KB after T5L1 compression, 768KB for T5L2).
- (2) Define a touch of a virtual page for this image (similar to the pop- up keyboard).
- (3) Place a window on the page to be used, and then you can (or write the VP+2 position integer value to UART to achieve movement) to slide the screen and choose icon.

### 6.12.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the Control: upper left corner (Xs, Ys), lower right corner (Xe,Ye), only for triggering. It must be consistent with icon display area of the 0x07 display variable.
0x0A	Pic_Next	2	Undefined, write FFFF.
0x0C	Pic_On	2	Undefined, write FFFF.
0x0E	TP_Code	2	0xFE0C, sliding icon selection key code.
0x10	0xFE	1	0xFE
0x11	VP	2	Variable pointer
0x13	Adj_Mode	1	0x00 horizontal sliding; 0x01 vertical sliding.
0x14	TP_Page_ID_ICON	2	Icon ID 0x0000=undefined
0x16	reserved	10	Write 0x00



## 6.12.2 Software Setting

Sliding icon sel

X 262 Y 129

W 239 H 192 Locked

☐ Key Ct Value(0x) 0

☐ Audio ID 0

Name ICONDragManager

☒ Data auto-uploading

VP (0x) 5830

Move Mode

Move Mode Lateral mover

Page ID 1000

Note: The size of this control should be the same as the corresponding icon page translation control.

End Value 5

Coordinates of the upper left corner of the touch area

Touch area width and height

Use the system variable interface 0xD4 command to simulate touch operations. You can leave this option unchecked.

The WAV voice ID in the WAE voice package ranges from 1-63. You can leave this option unchecked.

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. Slide icon selection to occupy 4 address spaces. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x1000-0x0FFF

Horizontal or vertical movement needs to be consistent with the direction of the panning display control on the icon page.

Horizontal effect:



Vertical effect:



The page ID of the large icon that needs to be dragged, naming range 1000-1023



Sliding speed, 0x00-0x01F, 0x00 is the slowest.

Setting around 05 is already faster, 0 requires a few slides, and 31 (0x1F) slides to the top once.



## 6.13 Bit button

Click the button to specify the bit adjustment for the specified variable. It can be used in combination with the bit variable icon display control, for example, 1 group of 16 devices corresponding to 16 bit addresses, you can set the variable address for each bit to start and stop the device operation.

### 6.13.1 Instruction Storage Format

Address	Definition	Length(byte)	Description
0x00	Pic_ID	2	Page ID
0x02	TP_Area	8	Area of the Control: (Xs, Ys), (Xe, Ye)
0x0A	Pic_Next	2	The target page to switch to, 0xFF** means no page switch. <b>Must be 0xFF**.</b>
0x0C	Pic_On	2	The page where the button press effect image is located, 0xFF** means there is no button press effect.
0x0E	TP_Code	2	0xFE0D
0x10	0xFE	1	0xFE
0x11	*VP	2	Variable pointer
0x13	Bit_Pos	1	Adjusted bit variable position, 0x00-0x0F.
0x14	Adj_Mode	1	Adjustment mode. 0x00=returns 0. 0x01=returns 1. 0x02= inversion. 0x03=1 when the button is pressed, 0 when the button is released.
0x15	NULL	11	Write 0x00

### 6.13.2 Software Setting

Display the upper left corner of the display area

Display area width and height

The variable storage space user arbitrarily uses the address range: 0x1000-0xFFFF. Bit button occupies 1 address. That is, the address of non-associated control need to be sapced by 1. System variable interface address range: 0x0000-0x0FFF.

1 word = 2 bytes = 16 bit. This refers to a specific bit out of the 16 bit from 0 to 15.

Adjust bit variable positions, 0x00-0x0F. Each bit combined with the variable display can be controlled individually. The sequence of high to low bits is from bit 15 to bit 0. Each bit has two states. 0 and 1, and the corresponding ID icon display state prompt is invoked by writing 0 or 1 to the specific bit position.

Bit icon instruction format

Mode	Bit value	Bit value
0	0	1
0x00	ICON05	ICON 15
0x01	ICON05	None
0x02	ICON05	Animation: ICON15-ICON 1E
0x03	None	ICON 15
0x04	None	Animation: ICON15-ICON 1E
0x05	Animation: ICON05-ICON0E	ICON 15
0x06	Animation: ICON05-ICON0E	None
0x07	Animation: ICON05-ICON0E	Animation: ICON15-ICON 1E

Bit icon control interface:

Bit Control setting: 1000000000000000

Bit Icon ON (1)/OFF (0):

Display mode: 0x00

Moving mode: 0x00

Interval: 0

① Set 0 0000 0000 0000 → 0x0000 → 5AA5 06 83 5000 01 0000  
Set 1 1000 0000 0000 → 0x8000 → 5AA5 06 83 5000 01 8000

② Single bit inversion  
1 inverts to 0 0000 0000 0000 → 0x0000 → 5AA5 06 83 5000 01 0000  
0 inverts to 1 1000 0000 0000 → 0x8000 → 5AA5 06 83 5000 01 8000

③ Press to write 1 once 1000 0000 0000 → 0x8000 → 5AA5 06 83 5000 01 8000  
Lift to write 0 once 0000 0000 0000 → 0x0000 → 5AA5 06 83 5000 01 0000

### 6.13.3 Examples of Instructions

Take enabling the highest bit" **bit15**" of bit15 to bit0 **as an example**, 1000 0000 0000 0000 upload instructions in set 0, set 1, INV, and Inching as follows.

(1) **Set 0**. Write 0 to bit15 of the 16 bits.

Rx: 5AA5 06 83 5000 01 **0000**; 0x0000 is obtained by converting the binary data **0**000 0000 0000 0000 into hexadecimal data.

(2) **Set 1**. Write 1 to bit15 of the 16 bits.

Rx: 5AA5 06 83 5000 01 **8000**; 0x8000 is obtained by converting the binary data **8**000 0000 0000 0000 into hexadecimal data.

(3) **Inversion**, single bit inversion, 1 inversion for 0; 0 inversion for 1.

Set the current state of bit15 to 1, take the inverse 0 and upload it.

Rx: 5AA5 06 83 5000 01 **0000**; 0x0000 is obtained by converting binary data **0**000 0000 0000 0000 into hexadecimal data.

Set the current state of bit15 to 0, take the inverse 1 and upload it: Rx: 5AA5 06 83 83

Rx: 5AA5 06 83 5000 01 **8000**; 0x8000 is obtained by converting binary data **1**000 0000 0000 0000 into hexadecimal data.

(4) **Inching**, press once to write 1, release once to write 0.

Rx1: 5AA5 06 83 5000 01 **8000**; 0x8000 is obtained by converting binary data **1**000 0000 0000 0000 into hexadecimal data.

Rx2: 5AA5 06 83 5000 01 **0000**; 0x0000 is obtained by converting binary data **0**000 0000 0000 0000 into hexadecimal data.

(5) Write instruction, **bit0** on (write 1)

Tx: 5AA5 05 82 5000 **0001**; 0x0001 obtained by converting the binary data 0000 0000 0000 000**1** to hexadecimal data.

(6) Write instruction, **bit15** on (write 1)

Tx: 5AA5 05 82 5000 **8000**; 0x8000 is obtained by converting binary data **1**000 0000 0000 0000 into hexadecimal data.

(7) Write instruction, **high 8 bits** on (write 1)

Tx: 5AA5 05 82 5000 **FF00**; 0xFF00 is obtained by converting binary data **1111 1111** 0000 0000 to hexadecimal data.

(8) Write instruction, **low 8 bits** on (write 1)

Tx: 5AA5 05 82 5000 **00FF**; 0x00FF is obtained by converting the binary data 0000 0000 **1111 1111** to hexadecimal data.

(9) Write instruction, bit0, bit2, bit4, bit6, bit8, bit10, bit12, bit14 on

Tx: 5AA5 05 82 5000 **5555**; 0x5555 is obtained by converting binary data 0 **10 1 010 1 0 101 010 1 0 10 1** into hexadecimal data.

(10) Write instruction, bit1, bit3, bit5, bit7, bit9, bit11, bit13, bit15 on

Tx: 5AA5 05 82 5000 **AAAA**; 0xAAAA is obtained by converting the binary data **1010 1010 10 10 10 10** into hexadecimal data.


(11) Write instruction, **all 16 bits** on (all write 1)

Tx: 5AA5 05 82 5000 **FFFF**; 0xFFFF is obtained by converting binary data **11 11 11 11 11 11 11 11** to hexadecimal data.

(12) Write instruction, **all 16 bits** off (all write 0)

Tx: 5AA5 05 82 5000 **0000**; 0x0000 is obtained by converting the binary data 0000 0000 0000 0000 into hexadecimal data.

#### 6.13.4Effect

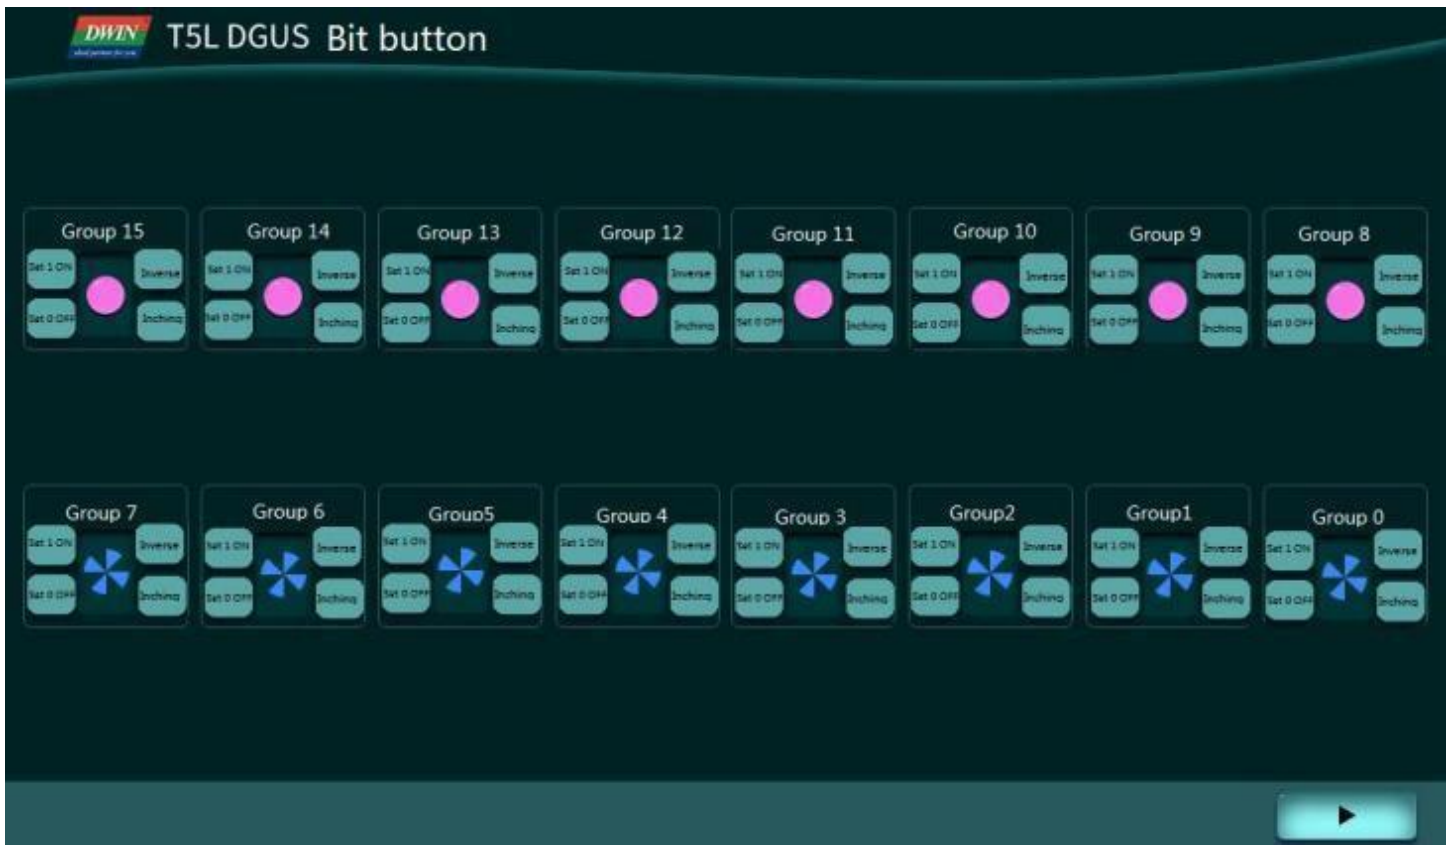

## Chapter 7 Display Variable Configuration

The display variable configuration is stored in the 14. BIN, which consists of display instructions according to the control configurations.

Each display instruction occupies a fixed storage space of 32 bytes. Each page has a fixed allocation of 2KB, 4KB or 8KB (0x0800, 0x1000 or 0x2000) of variable storage space, i.e. up to 64, 128 or 255 variables per page. The maximum size of the 14. BIN file is 2 MB, which means up to 1024 pages can be configured (512 pages in 128-variable mode and 255 pages in 255-variable mode).

For 16 MBFLASH products, one 256 KB subspace in FLASH is fixed as 14. BIN configuration file space, that is, under the fixed allocation of 2KB, 4KB or 8KB (64, 128 or 255 variables) variable storage space per page, up to 128 pages (64 pages in 128-variable mode, 32 pages in 255-variable mode).

The data variable display space is 128 Kbytes.

For the same type of variables, the higher the storage location, the higher the display priority.

14. BIN can be generated by DGUS and used in applications with touch variables, associated VP, modification of 22 file, SP, access via UART or DWIN OS to achieve complex functions.

A display variable configuration instruction consists of the following six parts.

Number	Definition	Length	Definition
1	0x5A	1	Fixed
2	Type	1	Variable type
3	*SP	2	The variable description file is loaded from Flash and stored to the address pointer of the data storage area. 0xFFFF means not dumped to the data storage area.
4	Len_Dsc	2	The word length of the variable description content.
5	*VP	2	The variable address is 0x0000 - 0xFFFF. For some variables that do not need to specify VP, write 0x0000. When the high byte of VP is 0xFF, this instruction will be canceled.
6	Description	N	The variable description content.

## 7.1 List of Display Variables

Number	Code	Variable name	Data Length (Character)	Description
01	0x00	Variable Icon	1	The change range of a data variable linearly corresponds to a group of icon display; when the variable changes, the icon automatically switches accordingly. It is mostly used for detailed dashboard and progress bar display. Support background overlay and transparency settings. Background filter intensity can be set.
02	0x01	Animation Icon	2	A fixed value data variable corresponds to 3 different icon indication states: not display, display fixed icon, and display animation icon. It is mostly used for variable alarm prompts. The variable occupies 2 word positions, and the (VP+1) position is reserved; the icon ID cannot exceed 255 (0xFF). Support background overlay, transparency settings. And animation speed settings. Support single play mode. Background filter intensity can be set.
03	0x02	Slider Display	1	The change range of a data variable corresponds to the change of the display position of an icon (slider). It is mostly used for the indication of liquid level, dial and progress meter. Support background overlay and transparency settings. Background filter intensity can be set.
04	0x03	Artistic Variables	1/2/4	Use icon to replace font library to display variable data. Support background overlay and transparency settings. Background filter intensity can be set.
05	0x04	Image Animation	Without	Play a group of full- screen pictures at the specified speed. It is mostly used for boot interface or screen saver
06	0x05	Icon Rotation	1	The range of change of a data variable linearly corresponds to the angle data, and then an icon is rotated according to the corresponding angle data. Background filtering intensity can be set. Mostly used for pointer dashboard display.
07	0x06	Bit Icon	3	The 0/1 state of each bit of a data variable corresponds to two of the 8 different display schemes, and a icon (or icon animation) is used for corresponding display. Background filter intensity can be set. Mostly used to display the switch status, such as the operation (animation) and stop (stationary icon) of the fan.
08	0x07	Icon Page Tran	4	The JPEG icon page that exceeds the screen resolution is displayed by panning up and down or left and right on the screen window. Icon sliding selection can be achieved by combining this control with 0x0C touch variables. Background filter intensity can be set.
09	0x08	Icon Overlay	Max 120KB	The JPEG icon of the variable buffer is superimposed and displayed in the specified area of the current page, and the display brightness and transparency can be set. VP= 5AA5: turns on the display; VP+1=JPEG data buffer length; VP+2=JPEG data start. Background filter intensity can be set.
10	0x09	Batch Va Icon	Max 64KB	According to the definition of the variable buffer, the icon is quickly copied from the background or video memory and displayed to the specified location.





11	0x10	Data Variables	1/2/4	Display a data variable according to the specified format (integer, decimal with unit or not) with the specified font and size of Arabic numerals. Support character spacing adjustment/ non- adjustment selection; support integer bit invalid zero display/ non- display. Supports jagged optimized 8 bit encoding font library.
12	0x11	Text Display	Max 2K	Display the character string in the specified text box display area in the specified format (decided by the selected font library). Supports jagged optimized 8 bit encoding font library.
13	0x12_00	RTC Display(Text)	None	Display RTC in text according to user edit format. Supports jagged optimized 8 bit encoding font library.
14	0x12_01	RTC Display(Watch)	None	The calendar RTC is displayed with a pointer dial using the icon rotation.
15	0x13	HEX Data	Max 8	The variable data is displayed at intervals of ASCII characters specified by the user in byte HEX mode. It is mostly used for timing display, such as displaying 0x1234 as 12:34. Supports jagged optimized 8 bit encoding font library. Support the conversion of HEX data into BCD code display, for example, 0x0C is converted to 0x12 and displayed as 12.
16	0x14	Text Scroll	User- defined	Scroll the text stored in VP in the designated area of the screen.
17	0x15	Data Window	2	Display the data variable in a designated display window, and highlight the selected value. Combined with the touch screen sliding or incremental adjustment, the data can be scrolled and displayed. It can also be controlled by DWIN OS to adjust the speed. Supports saw tooth optimized 8 bit encoding font library. The variable occupies 2 word positions, and the (VP+1) position is reserved.
18	0x16	DGUSII Text	Max 2K	Based on DGUS II font, display the string in the specified text box display area, and scaling is not supported. Compared to 0x11 text display, 0x16 mainly displays text without jaggies in multiple language from direct font libraries.
19	0x17	Roll Character	Max 2	The basic functions are the same as the data window instructions. Increase the process animation display, increase the input method keyboard and text scrolling selection.
20	0x18	GTF Icon	Max 128	Display icons with high efficiency.
21	0x20	Real- Time Curves	2K/channel	Based on the curve buffer data to automatically match and display the real- time curve (trend graph). You can specify the display area, center axis coordinates, display scale (enlarge/ reduce), and set the direction of the curve.
22	0x21_01	Graphic_ Placement	User- defined	Set point (x, y, color).
23	0x21_02	Graphic_ End Connection		End point connection (color, (x0, y0), ... (xn, yn).
24	0x21_03	Graphic_ Rectangle		Display rectangle, color, position and size are controllable.
25	0x21_04	Graphic_ Rectangle Fill		Fill the specified rectangular area with controllable fill color, position and size.
26	0x21_05	Graphic_ Circle Display		Displays the circle as center and radius. The color and thickness of the circle can be set.
27	0x21_06	Graphic_ Picture Copy paste		Copy an area from the specified image and paste it on the currently displayed page.
28	0x21_07	Graphic_ ICON Display		The ICON is displayed, and the icon library can be selected.
29	0x21_08	Graphic_ Enclosed Area Fill		Select the seed position and fill the enclosed solid color area with the specified color.

30	0x21_09	Plot_ Spectrum Display		Display spectrum (vertical lines) according to variable data, with controllable line color and position.
31	0x21_11	Drawing_Ellipse arc display		Display the arc of the ellipse according to the center of the ellipse, the major axis, the minor axis, and the display color.
32	0x21_0D	Adjust the Area Display Brightness		Adjust the display brightness of the designated display area to highlight or dilute the background display.
33	0x21_0E	Graphic_ Dual Color Bitmap Display		Select the seed position and fill the enclosed solid color area with the specified color.
34	0x21_12	Drawing_ four-color bitmap display		Every 2 bits represents 1 point, and the four- color bitmap display is performed quickly in the specified area. Multiple four- color bitmap display areas can be defined, and multiple layers can be used for more color display.
35	0x23	Process Bar	1	Display a process bar at the specified position.
36	0x24	Area Scrolling	1	Move the content of the specified area in a circular manner, and the direction of movement can be set. Used to simply implement dynamic running effects such as flowcharts and progress bars. The variable address is occupied by the system and should not be used by users.
37	0x25	QR Code	Max 259	Display the QR code graphic on the screen according to the specified content.
38	0x26	Brightness		Adjusts the display brightness of the specified display area to highlight or fade the background display.
39	0x30	Data Transmit	Max 11	After the page is switched, the predefined data is transferred to the variable or serial port once.
40	0x31	Video	6	Simultaneous playback of ICL files and WAE files converted by MJPEG to form digital video. VP and VP+1 positions (user control interface, double word). D3: 0x5A means digital video playback is on, otherwise it's off. D2: Playback status control, DGUS will clear it after processing. 0x01= Stop, the screen stays at the first frame. 0x02 = Pause/resume playback. 0x03 = Playback from the specified position (position is determined by D1:D0). D1: D0: Playback start position in seconds, valid only when D2=0x03. VP+ 2 to VP+ 5 positions (status feedback interface, two double words, user can only read). D7: Current playback status feedback, 0x00= Stop, 0x01= Playing. D6:D4: Undefined. D3:D2 Total video length, 0x0000-0xFFFF, in seconds. D1:D0 Current playback video position, 0x0000-0xFFFF in seconds.

Note: VP refers to the storage location (pointer) of the user variable storage space.

Set the variable SP during the development by DGUS, and store the display variable configuration information in the user variable space pointed to by the variable SP.

In the application, it can be accessed through UART or DWIN OS, dynamically open, close or modify the variable configuration information to realize the complex display variable combination function.

## 7.2 Variables Icon

The function of variable icon is to display the variation range of a data variable linearly corresponding to a group of icons. When the variable changes, the icons are automatically switched accordingly.


It is mostly used for fine dashboard and progress bar display.

This display function is usually used with incremental adjustment and text input.

### 7.2.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A00	2	
0x02		*SP	2	Variable description pointer, 0xFFFF means loaded by the configuration file.
0x04		0x000A	2	
0x06	0x00	VP	2	Variable pointer, integer.
0x08	0x01	(x, y)	4	Upper- left coordinates of the icons to display
0x0C	0x03	V_Min	2	Min value. Values smaller than " V_Min" will show no Icons.
0x0E	0x04	V_Max	2	Max value. Values greater than " V_Max" will show no Icons.
0x10	0x05	Icon_Min	2	Icon associated to the V_Min.
0x12	0x06	Icon_Max	2	Icon associated to the V_Max.
0x14	0x07:H	Icon_Lib	1	Index in the FLASH memory of the icon library to use.
0x15	0x07:L	Mode	1	Display mode: 0x00 = transparency mode Others= background display
0x16	0x08:H	Layer_Mode	1	0x00: overlay 0x01: overlay mode 1 0x02: overlay mode 2
0x17	0x08:L	ICON_Gamma	1	Icon brightness in overlay mode 2, range 0x00-0xFF, unit 1/256.
0x18	0x09:H	PIC_Gamma	1	Background brightness in overlay mode 2, range 0x00- 0xFF, unit 1/256.
0x19	0x09:L	Filter_Set	1	The intensity of the background color filtering in transparency mode, range 0x01-0x3F.

## 7.2.2 Software Setting

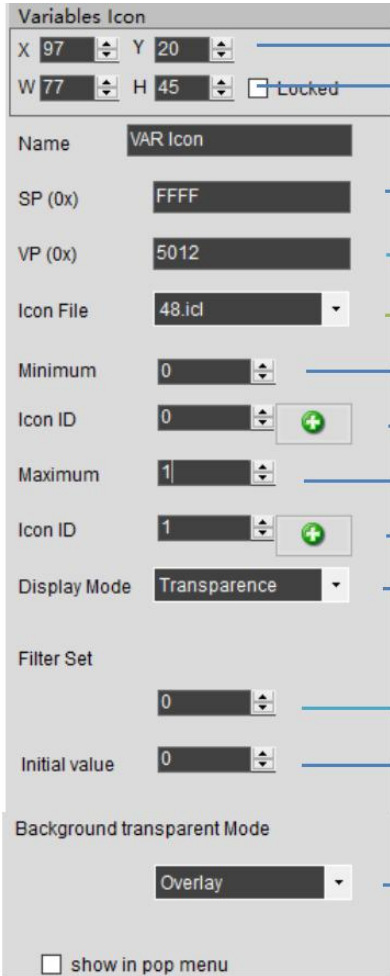

**Coordinates of the upper left corner of the display area**

**Display area width and height**

**Set by default or actual needs**

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The data window indicates that it occupies 2 space addresses. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.

It is recommended to start naming at position 48, summarize it into an ICL file for easy recall. For location naming, please refer to FLASH division, which is generated in advance and placed in the DWIN\_SET folder.

In the example, the lower limit 0 corresponds to icon 0, 5A A5 05 82 5012 0000 (display icon 0).

In the example, the upper limit 1 corresponds to icon 1, 5A A5 05 82 5012 0000 (display icon 1).

Transparent is filter background color, that is, the background is not displayed. Otherwise, the background is displayed.

The filter intensity refers to the range of the filter background color value. When there is black around the ICL icon, file, the filter intensity can be increased. The range is 00-63. The Icon background color is recommended to be set to black for filtering. If the icon or the background picture file looks a little fuzzy, please check whether the selected picture quality for generating the ICL file is low, and whether you have clicked all settings.

The initial icon displayed on power-on also requires CFG file 0x05, 5 digits write 1 to load 22 files, 0x05 digits can write 0x38, which means that 22 initial value files are loaded, data upload is enabled, and touch audio is enabled.

**Can be set by default.**

### 7.2.3 Example of Instruction

① Display the icon corresponding to the lower limit 0

5A A5 05 82 5012 0000

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5012: VP;

0x0000: Display the icon corresponding to the lower limit of 0.

② Display the icon corresponding to the upper limit 1

5A A5 05 82 5012 0001

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5012: VP;

0x0001: display the icon corresponding to the upper limit 1.

③ The upper limit and lower limit are not displayed

5A A5 05 82 5010 0002

This instruction can call the icon ID that does not exist, it will not be displayed, and 0x0002 is the limit value.

④ Describe pointer hiding and moving icons

Hide and move the position need to use the description pointer. For the detailed explanation of the description pointer, see the data variable display description pointer instruction section.



## 7.3 Animation Icon

### 7.3.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A01	2	
0x02		SP	2	Parameter pointer. 0xFFFF: Disables SP ( no run- time modification).
0x04		0x000D	2	
0x06	0x00	VP	2	Variable pointer. High word: Unsigned Integer(0x0000- 0xFFFF). stores animation status. Low word: Reserved
0x08	0x01	(x, y)	4	Upper- left coordinates of the icons to display
0x0C	0x03	Reset_ ICON_ En	2	Indicates whether the animation should always start from the first frame when restarting. 0x0000: Animation continues from the last shown frame when reset. 0x0001: Animation starts from the first frame ("Icon_Start" ) when reset.
0x0E	0x04	V_ Stop	2	Value that stops the animation.
0x10	0x05	V_ Start	2	Value that starts the animation.
0x12	0x06	ICON_ Stop	2	Icon displayed when the animation is stopped. Range : 0x0000-0x00FF
0x14	0x07	ICON_ Start	2	Icon displayed at the first frame of the animation.
0x16	0x08	ICON_ End	2	Icon displayed at the last frame of the animation.
0x18	0x09:H	ICON_ Lib	1	Index in the FLASH memory of the icon library to use.
0x19	0x09:L	Mode	1	ICON display mode: 0x00 : Transparent background. Other Values: Opaque
0x1A	0x0A:H	Layer_ Mode	1	0x00: overlay 0x01: overlay mode 1    0x02: overlay mode 2
0x1B	0x0A:L	ICON_ Gamma	1	ICON brightness in overlay mode 2, range 0x00-0xFF, unit 1/256.
0x1C	0x0B:H	PIC_ Gamma	1	Background brightness in overlay mode 2, range 0x00-0xFF, 1/256.
0x1D	0x0B:L	Time	1	Time of single ICON, unit DGUS cycle, range 0x01-0xFF.
0x1E	0x0C:H	Display mode	1	0x00: loop mode. 0x01: single mode. When the variable is VP_ Stop, it play an animation once from Icon_ End to Icon_ Start. When the variable is VP_ Start, it play an animation once from Icon_ Start to Icon_ End. When the variable are other values, it display stop icon.
0x1F	0x0C:L	Filter_ Set	1	Filter set value in transparency mode, range 0x00-0x3F.



## 7.3.2 Software Setting

Parameter	Value	Description
X	148	The coordinates for the upper left corner of the display area
Y	47	The coordinates for the upper left corner of the display area
W	233	Display area width and height
H	333	Display area width and height
Locked	<input type="checkbox"/>	Set by default or actual needs
Name	Animation icon	Set by default or actual needs
SP (0x)	FFFF	The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The icon variable occupies 1 space. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF
VP (0x)	5650	The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The icon variable occupies 1 space. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF
Stop value	1	Start value: 0 (5A A5 05 82 5650 0000) Stop value: 1 (5A A5 05 82 5650 0001)
Start value	0	Start value: 0 (5A A5 05 82 5650 0000) Stop value: 1 (5A A5 05 82 5650 0001)
Icon file	45.icl	It is recommended to start naming at position 48, and summarize it into an ICL file for easy recall. For location naming, please refer to FLASH division, which is generated in advance and placed in the DWIN_SET folder,
stop icon ID	10	Write 0001 to the variable address, the corresponding icon ID when the animation stops
Start icon ID	10	Write 0000 to the variable address to play a set of icon IDs corresponding to the start and end of the animation
End icon ID	20	Write 0000 to the variable address to play a set of icon IDs corresponding to the start and end of the animation
Stop Ico	Not Reset	
Display mode	Transparence	Transparent is the filter background color. Show background
Filter Set	0	
Initial value	0	The initial icon displayed on power-on also requires CFG file 0x05.5 digits write 1 to load 22 file, 0x05 figits can write 0x38, which means that 22 initial value files are loaded, data upload is enabled, and touch audio is enabled.
Time of Single ICON(unit DGUS cycle)	15	Display time: 10*20ms (T5L cycle) 200ms
Animation display Mode	Loop	For example: Loop playback: 10 pictures in total from 10-20. When the 20 batch is played, it will return to the 10 to repeat the playback. Single playback: write 0000 value to the variable address, only play icon 10-20 once. Write the value 0001 to the variable address, and icon No. 10-22 will be played only once.
Background transparent Mode	Overlay	Overlay background ( recommended), mode 1 effect, mode 2 effect

### 7.3.3 Example of Instruction

① Turn on animation, loop play mode

5A A5 05 82 5650 0001

0x5A A5 Frame header;

0x05 Data length;

0x82 Write instruction;

0x6550 VP;

0x0001 Write 1 to start animation value.

② Stop animation, loop play mode

5A A5 05 82 5650 0000

0x5A A5 Frame header;

0x05 Data length;

0x82 Write instruction;

0x6550 VP;

0x0000 Write 0 to stop animation value.

③ Sequential animation, single play mode, animation display mode needs to be set to single play.

5A A5 05 82 5650 0001

0x5A A5 Frame header;

0x05 Data length;

0x82 Write instruction;

0x6550 VP;

0x0001 Play once.

After playing in sequence, it needs to be played in reverse order, not in sequence all the time.

④ Reverse order animation, single play mode, animation display mode needs to be set to single play.

5A A5 05 82 5650 0000

0x5A A5 Frame header;

0x05 Data length;

0x82 Write instruction;

0x6550 VP;

0x0000 Play in reverse order.

⑤ Hide, move, change the animation icon frame number

Hide, move the position, etc. need to use the description pointer.

For the use of the sp, please refer to 7. 12 data variables.

### 7.3.4 Effect

A set of icons for animation icon.




## 7.4 Slider Display

The slider display control is to correspond the change range of a data variable to the change of the display position of an icon (slider). It is mostly used for the indication of liquid level, dial, and progress meter.

Background overlay and transparency settings are supported, and the background filtering strength can be set.

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A02	2	
0x02		*SP	2	Parameter pointer. 0xFFFF: Disables SP ( no run- time modification)
0x04		0x000C	2	
0x06	0x00	VP	2	Variable pointer.
0x08	0x01	V_ Begin	2	Min value accepted by the control.
0x0A	0x02	V_ End	2	Max value accepted by the control.
0x0C	0x03	x_ Begin	2	Min position of the slider, when its value equals "V_ Begin". X coordinate for horizontal sliders, Y coordinate for vertical sliders.
0x0E	0x04	x_ End	2	Max position of the slider, when its value equals "V_ Begin". X coordinate for horizontal sliders, Y coordinate for vertical sliders.
0x10	0x05	ICON_ ID	2	Index of the icon in the icon library that will be used as the Slider handle.
0x12	0x06	Y	2	Position of slider icon in the secondary axis. Y coordinate for horizontal sliders, X coordinate for vertical sliders.
0x14	0x07:H	x_ adj	1	Icon position offset adjustment on the primary axis, in pixels. Offset in the X axis for horizontal sliders, and in the Y axis for vertical sliders.
0x15	0x07:L	Mode	1	Slider mode. 0x00: Horizontal 0x01: Vertical.
0x16	0x08:H	ICON_ Lib	1	Index in the FLASH memory of the icon library to use.
0x17	0x08:L	ICON_ Mode	1	ICON display mode: 0x00: Transparent background. Other Values: Opaque background
0x18	0x09:H	VP_ Data_ Mode	1	Value Memory Size. 0x00: *VP points to the VP(integer). 0x01: * VP points to the High Byte of the VP( VP_ H). 0x02: * VP points to the Low Byte of the VP( VP_ L).
0x19	0x09:L	Layer_ Mode	1	0x00: overlay 0x01: overlay mode1 0x02: overlay mode 2
0x1A	0x0A:H	ICON_ Gamma	1	ICON brightness in overlay mode 2, range 0x00-0xFF, unit 1/256.
0x1B	0x0A:L	PIC_ Gamma	1	Background brightness in overlay mode 2, range 0x00-0xFF, 1/256 .
0x1C	0x0B:H	Filter_ Set	1	Filter set value in transparency mode, range 0x00-0x3F.

## 7.4.1 Software Setting
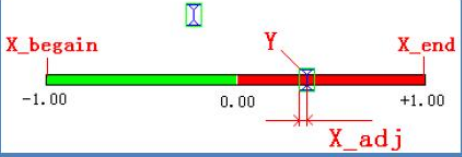
<p>Slider Display</p> <p>X 256 Y 60</p> <p>W 220 H 72 <input type="checkbox"/> Locked</p>	<p>The coordinates of the upper left corner of the display area</p> <p>Display area width and height</p>
<p>Name Slider Display</p>	
<p>SP (0x) FFFF</p>	<p>Set by default or actual needs</p>
<p>VP (0x) 00A1</p>	<p>The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF The icon variable occupies 1 space. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.</p>
<p>Initial Value 0</p>	
<p>Terminal Value 255</p>	<p>The data size range cannot be set to 0 at the same time, otherwise it cannot slide.</p>
<p>Slider mode Horizontal</p>	<p>Horizontal and vertical sliding mode</p>
<p>Icon file 45.icl</p>	<p>It is recommended to start at position 48 and summarise into an .icl file. Generate in advance to put into the DWIN_SET folder.</p>
<p>Slide icon 8 </p>	<p>Swipe to display the ICL icon </p>
<p>Display mode Transparence</p>	<p>Transparent is the filter background color. Show background</p>
<p>Filter Set 63</p>	
<p>Y Coordinate 60</p>	<p>Set by default or actual needs</p> 
<p>(X)Coordinate offset 0 (0-255)</p>	
<p>Variable type High byte</p>	<p>Here the system variable interface 0x00A1 address points to the high byte as drag adjustment to change the volume.</p>
<p>Initial value 0</p>	
<p>System will leave initial and terminated value as the default Operating area</p>	
<p>Background transparent Mode Overlay</p>	<p>Overlay background (recommended), mode 1 effect, mode 2 effect</p>

## 7.4.2 Example of Instructions

Use 0x82 instruction to write the data within the setting range to VP.

Display data 10

5A A5 05 82 00A1 000A

0x5A A5 Frame header;

0x05 Data length;

0x82 Write instruction;

0x00A1 VP;

0x000A Data value.

## 7.4.4 Effect



## 7.5 Artistic Variables

The artistic variables control is to use a icon to replace the font library for the variable data display . Its function is similar to the variables icon control.

It supports background overlay and transparency settings, and the background filtering strength can be set.

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A03	2	
0x02		*SP	2	Parameter pointer. 0xFFFF: disables SP ( no run- time modification).
0x04		0x0009	2	
0x06	0x00	VP	2	Variable pointer.
0x08	0x01	(X, Y)	4	Start display position: Upper- left coordinates of the icons to display in Left- alignment mode or Upper- right coordinates of the icons to display in Right- alignment mode.
0x0C	0x03	ICON0	2	Icon corresponding to digit 0. The Icon Library must follow this indexing order: [0123456789-].
0x0E	0x04:H	ICON Lib	1	Index in the FLASH memory of the icon library to use.
0x0F	0x04:L	ICON_ Mode	1	0x00 : Transparent background. Other Values: Opaque background
0x10	0x05:H	Integer_ Digits	1	Number of digits to the left of the decimal separator.
0x11	0x05:L	Decimal_ Digits	1	Number of digits to the right of the decimal separator.
0x12	0x06:H	VP_ Mode	1	Value Memory Size. 0x00: 16-bit Integer(2 bytes). Range: -32768 ~ 32767 0x01: 32-bit Integer(4 bytes). Range: -2147483648 ~ 2147483647  0x02: 8- bit Unsigned Integer in High Byte of the VP. Range: 0 ~ 255 0x03: 8-bit Unsigned Integer in Low Byte of the VP. Range: 0 ~ 255 0x04: 64-bit Integer(8 bytes). Range: -9223372036854775808 ~ 9223372036854775807 0x05: 16-bit Unsigned Integer(2 bytes). Range: 0 ~ 65535 0x06: 32-bit Unsigned Integer(4 bytes). Range: 0 ~ 4294967295 0x07: float point number(4 bytes) 0x08: double float point number(8 bytes)
0x13	0x06:L	Alignment	1	0x00: Left-alignment. 0x01: Right-alignment.
0x14	0x07:H	Layer_ Mode	1	0x00: overlay 0x01: overlay mode 1 0x02: overlay mode 2
0x15	0x07:L	ICON Gamma	1	Icon brightness in overlay mode 2, range 0x00-0xFF, unit 1/256 .
0x16	0x08:H	PIC_ Gamma	1	Background brightness in overlay mode 2, range 0x00 - 0xFF, unit 1/256.
0x17	0x08:L	Filter_ Set	1	Filter set value in transparency mode, range 0x00-0x3F.



## 7.5.1 Software Setting

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The word art variable occupies 1/2/4 address according to the variable type. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.

It is recommended to start naming the 48th position, and generate it and put it into DWIN\_SET folder.

0 corresponds to the icon ID of word art 0.

Transparent is the filter background color: 9. Displays the background: 9. When there are dots around the icon, you can set the filtering parameter, range 0-63, the larger the value, the stronger the filtering effect.

Set the variable type according to the data range.

For example, if the integer digit is set to 2, the decimal place is set to 1, it will display 2 integers and 1 decimal. Write command: 5A A5 05 82 05700 0064 will be displayed as 10.0

For example, set the number of integer digits to display 2, address write data 9, check the effect: 09; do not check: 9

Left: 19 Middle: 19 Right: 19

The initial value displayed on power-on, and at the same time, the 0x05.5 bit of the CFG file is required to write 1 to load 22 files. Write 0x38 to the 0x05 address, which means to load the 22 initial value file, upload the data, and turn on the touch sound.

Overlay background (recommended), mode 1 effect, mode 2 effect.

## 7.5.2 Examples of Instructions

5A A5 05 82 5700 0002

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5700: VP;

0x0002: Display data 2.

## 7.5.4 Effect



## 7.6 Image Animation

The image animation control is used to create an animation.  
It can achieve screen jumps via serial communication.

### 7.6.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A04	2	
0x02		*SP	2	
0x04		0x0005	2	
0x06	0x00	0x0000	2	Fixed value 0x0000
0x08	0x01	Pic_Begain	2	Start icon position
0x0A	0x02	Pic_End	2	Terminate icon position
0x0C	0x03:H	Frame_Time	1	The display time of one frame (one picture), the unit is 8ms.
0x0D	0x03:L	ICL_LIB_ID	1	Picture library file location, 0x00-0xFF, 0x00 indicates the use of the background icon library.
0x0E	0x04	Pic_End_Exp	2	When using NAND FLASH to extend the animation stored in it, the page position automatically returned after the play is over.
0x10	0x05	Reserved	16	Write 0x00

The starting picture position must be less than the terminal location.

If pictures animation variables are also set on the PIC\_END page, it can be continuously replayed.

Candidate instruction Switching pictures or touch instruction Switching pictures can end the replay.

### 7.6.2 Software Setting

Open DGUS, click display control - image animation, then set the control display area, and configure the functions. This function does not need to be triggered by a button, and the area can be arbitrarily selected to ensure that it is on the specified page.

**Image animation Display**

X 193 Y 17  
W 90 H 48 ☐ Locked

Name Image Animation

SP (0x) FFFF

Start pic ID 0  
End pic ID 9

RTC Setting 9 (x 8ms)

icl lib id(0x00:value of file of cfg)  
20

Pic End ID  
0 set

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The start and end pictures are played sequentially to form a set of animation effects.

Single picture display time

### 7.6.3 Example of Instructions

5A A5 07 82 0084 5A01 0000

0x5AA5: Frame header;

0x07: Data length; 0x82:

Write instruction;

0x0084 System variable interface address, which is a fixed switching page address . Refer to the section 7. 1 for more details.

0x5A01: Fixed. The high byte 0x5A means that page processing is started once, and the CPU is cleared after processing; the low byte 0x01 means that the page is switched, and the picture specified in the picture storage area is displayed to the current background page; see the system variable interface list for details.

0x0000: Page ID, the page number to be switched.

### 7.6.4 Effect





## 7.7 Icon Rotation

The icon rotation control linearly corresponds the change range of a data variable to the angle data, and then rotate an icon according to the corresponding angle data and display it.

It is mostly used for pointer instrument panel display.

### 7.7.1 Instruction Storage Format

The background filter intensity can be set

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A05		
0x02		SP	2	Parameter pointer. 0xFFFF: Disables SP (Non run- time modification).
0x04		0x000C	2	0x000C.
0x06	0x00	VP	2	Variable pointer.
0x08	0x01	ICON_ID	2	Index of the icon in the icon library that will be rotated (usually a dial pointer).
0x0A	0x02	ICON_xc	2	Center of rotation on the icon. X coordinate.
0x0C	0x03	ICON_Yc	2	Center of rotation on the icon. Y coordinate.
0x0E	0x04	Xc	2	The x coordinates of the icon rotation center on the current page.
0x10	0x05	Yc	2	The y coordinates of the icon rotation center on the current page.
0x12	0x06	V_Begin	2	Min value.
0x14	0x07	V_End	2	Max value.
0x16	0x08	AL_Begin	2	Starting rotation angle, 0-720 (0x000-0x2D0), unit 0.5° .
0x18	0x09	AL_End	2	End rotation angle, 0-720 (0x000-0x2D0), unit 0.5° .
0x1A	0x0A:H	VP_Mode	1	Value Memory Size. 0x00: *VP points to the VP (integer). 0x01: *VP points to the High Byte of the VP (VP_H). 0x02: *VP points to the Low Byte of the VP (VP_L).
0x1B	0x0A:L	Lib_ID	1	Index in the FLASH memory of the icon library to use.
0x1C	0x0B:H	Mode	1	0x00: Transparent background. Other Values: Opaque background
0x1D	0x0B:L	Filter_Set	1	When the icon is transparent, the strength of the background color filtering is 0x01-0x3F.

## 7.7.2 Software Setting

Icon rotation indication

X 104 Y 25

W 66 H 59 ☐ Locked

Name Icon Rotation

SP (0x) FFFF

VP (0x) 5438

Icon file 48.icl

Icon ID 28

ICON Rotation Center:

X 10 Y 117

Rotation center, as the coordinate of upper left of configure button

Start Variable 0

End Variable 200

Start angle 495

End angle 225

Display Mode Transparence

Filter Set 63

VP\_Mode Int

Initial value 0

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. Icon rotation occupies 1 address space. That is, the non-associated control key address need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.

It is recommended to start at position 48 and summarize it into an ICL file. Generate it in advance and put it into DWIN SET folder.

Pointer icon ID.

Icon rotation center coordinates, which can be specified by loading icons.

The start and end values of the data range are displayed.



495 degrees, 225 degrees calculation. 360 degrees is divided into 4 single sub-areas of 90 degrees; 90 degrees is divided into 4 individual sub-areas for 22.5; Starting angle of rotation:  $720 - (90 + 22.5) * 2 = 495$  degrees. End rotation angle:  $(90 + 22.5) * 2 = 225$  degrees.



### 7.7.3 Examples of Instructions

5A A5 05 82 5438 0000

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5438 VP;

0x0000 data 0; the icon pointer points to the dial 0 degree.

5A A5 05 82 5438 0064

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5438 VP;

0x0064 data 100; the icon pointer points to 100 degrees.

5A A5 05 82 5438 00C8

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5438 VP; 0x00C8 data 200; the icon pointer points to 200 degrees.

### 7.7.4 Effect





## 7.8 Bit Icon

The bit icon control is used to show fixed and/or animated Icons, according to a bit flag value on the VP.

The value of each bit represents the state of a single Icon, and many icons can be shown in different states, based on the VPC.

It is often used to display several alarms at once, or to implement bar graphs.

### 7.8.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description																														
0x00		0x5A06	2																															
0x02		*SP	2	Variable description pointer, 0xFFFF means loaded by configuration file.																														
0x04		0x000C	2																															
0x06	0x00	*VP	2	Bit variable pointer, word variable																														
0x08	0x01	*VP_AUx	2	Auxiliary variable pointer, double word, cannot be accessed by user software																														
0x0A	0x02	Act_Bit_Set	2	The bit position whose value is 1 indicates that the corresponding position of *VP needs to be displayed.																														
0x0C	0x03:H	Display_mode	1	Define the display mode:																														
				<table><tr><th>Mode</th><th colspan="2">Bit value</th></tr><tr><td></td><th>0</th><th>1</th></tr><tr><td>0x00</td><td>ICON0S</td><td>ICON1S</td></tr><tr><td>0x01</td><td>ICON0S</td><td>None</td></tr><tr><td>0x02</td><td>ICON0S</td><td>Animation: ICON1S-ICON1E</td></tr><tr><td>0x03</td><td>None</td><td>ICON1S</td></tr><tr><td>0x04</td><td>None</td><td>Animation: ICON1S-ICON1E</td></tr><tr><td>0x05</td><td>Animation: ICON0S-ICON0E</td><td>ICON1S</td></tr><tr><td>0x06</td><td>Animation: ICON0S-ICON0E</td><td>None</td></tr><tr><td>0x07</td><td>Animation: ICON0S-ICON0E</td><td>Animation: ICON1S-ICON1E</td></tr></table>	Mode	Bit value			0	1	0x00	ICON0S	ICON1S	0x01	ICON0S	None	0x02	ICON0S	Animation: ICON1S-ICON1E	0x03	None	ICON1S	0x04	None	Animation: ICON1S-ICON1E	0x05	Animation: ICON0S-ICON0E	ICON1S	0x06	Animation: ICON0S-ICON0E	None	0x07	Animation: ICON0S-ICON0E	Animation: ICON1S-ICON1E
				Mode	Bit value																													
					0	1																												
				0x00	ICON0S	ICON1S																												
				0x01	ICON0S	None																												
				0x02	ICON0S	Animation: ICON1S-ICON1E																												
				0x03	None	ICON1S																												
				0x04	None	Animation: ICON1S-ICON1E																												
				0x05	Animation: ICON0S-ICON0E	ICON1S																												
0x06	Animation: ICON0S-ICON0E	None																																
0x07	Animation: ICON0S-ICON0E	Animation: ICON1S-ICON1E																																
0x0D	0x03:L	Move_Mode	1	Bitmap icon arrangement:																														
				0x00= x++, the non-display bit specified by Act_Bit_Set is not reserved;																														
				0x01 = Y++, the non-display bit specified by Act_Bit_Set does not retain the position																														
				0x02 = x++, the non-display bit specified by Act_Bit_Set is reserved for DIS_MOV position																														
				0x03=Y++, the non-display bit specified by Act_Bit_Set is reserved for DIS_MOV position																														
0x0E	0x04:H	Icon_Mode	1	ICON display mode: 0x00: Transparent background 0x01: opaque																														
0x0F	0x04:L	Icon_Lib	1	Index in the FLASH memory of the icon library to use.																														
0x10	0x05	ICON0S	2	Dose not show animation mode, bit_0 icon ID Display animation mode, bit_0 icon animation start ID position																														
0x12	0x06	ICON0E	2	Display animation mode, bit_0 icon animation end ID position																														
0x14	0x07	ICON1S	2	Dose not show animation mode, bit_1 icon ID Display animation mode, bit_1 icon animation start ID position																														
0x16	0x08	ICON1E	2	Display animation mode, bit_1 icon animation end ID position																														
0x18	0x09	(x, y)	4	The starting position variable display position, the coordinate position of the upper left corner of the icon.																														
0x1C	0x0B	DIS_MOV	2	Next icon coordinate move coordinate interval.																														
0c1E	0x0C:H	Filter_Set	1	Write 0x00																														

## 7.8.2 Software Setting

Bit icon display

X 240 Y 18  
W 125 H 48 ☐ Locked

Name Bit icon

SP (0x) FFFF  
VP (0x) 6000  
AP(0x) 8020

Bit Icon ON (1) / OFF (0):  
000000000000000001

Setting

Display mode 0x03  
Moving mode 0x00  
Interval 0  
Icon file 48.icl

ICON0S 0   
ICON0E 0   
ICON1S 29   
ICON1E 0

Display mode Transparence  
Filter Set 0  
Initial value 0

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

Variable storage space user can use address range arbitrarily: 0x1000-0xFFFF.  
The bit variable occupies a Max. of 3 space addresses. That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF.

If the animation mode is used, the auxiliary address must be separated by 2 addresses, and the address cannot be repeated. You don't need to set the animation if you don't use it.

The 0th bit is enabled here, a total of 16 bits.

0x01-0x07, define the wind table Display\_mode.  
In 0x03 mode, writing 0 to the corresponding bit dose not display the icon, writing 1 to display the icon.

0x00-0x03, define the wine table Move\_Mode.

The pixel interval to move the next icon.

It is recommended to start at position 48 and summarize them into an ICL file. Generate it in advance and put it into the DWIN SET folder.

The meaning of icon mode and non-display mode settings:  
ICON1S: Write 1 to the corresponding bit to display the icon ID, or not display it.  
ICON1E: No need to set at this time.  
The meaning of the animation mode setting:  
ICON1S: Write 1 icon animation start ID in the corresponding bit.  
ICON1E: Write 0 icon animation end ID.

The meaning of icon mode and non-display mode settings:  
ICON1S: Write 1 to the corresponding bit to display the icon ID, or not display it.  
ICON1E: No need to set at this time.  
The meaning of the animation mode setting:  
ICON1S: Write 1 icon animation start ID in the corresponding bit.  
ICON1E: Write 1 icon animation end ID.

### 7.8.3 Example of Instructions

① 16 bits fully open

5A A5 05 82 6000 FFFF

0x5A 0xA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x6000: VP;

0xFFFF: 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 11 Write 1 to all 16 bits, which is FFFF.

② 16 bits all closed

5A A5 05 82 6000 0000

0x5A 0xA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x6000: VP;

0x0000: All 16 bits are written with 0.

③ Turn on bit 0 and bit 3

5A A5 05 82 6000 0009

0x5A 0xA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x6000: VP;

0x0009: Write 1 to bit 0 and bit 3, 0000 0000 0000 1001 is 0x0009.

### 7.8.4 Effect



## 7.9 Icon Page Tran

Display icons larger than the screen resolution by panning up and down or left and right in the screen viewport. Icon sliding selection can be realized by this control and sliding icon control.

The background filter strength can be set.

### 7.9.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A07	2	
0x02		*SP	2	Variable description pointer, 0xFFFF means loaded by configuration file.
0x04		0x0009	2	
0x06	0x00	*VP	2	Variable pointer, each variable occupies 4 words. VP=The display starting position of the current display window on the icon page, (x, y) 2 characters; VP+2=moving distance, 16bit signed number; Negative numbers move right (down), positive numbers move left (up); VP+3 Reserved.
0x08	0x01:H	ICON_Lib	1	Icon library ID, 0x00 means use the background icon library.
0x09	0x01:L	Disp_Mode	1	ICON display mode: 0x00=transparent (do not display icon background); others=display background.
0x0A	0x02:H	Filter_Set	1	When the icon is displayed transparently, the intensity of background color filtering is 0x01-0x3F.
0x0B	0x02:L	Move_Mode	1	Move mode: 0x00=horizontal movement, the X coordinate of the ICON page can be very large. Others = vertical movement, the Y coordinate of the ICON page can be very large. The JPEG file size of the ICON icon page cannot exceed the hardware limit: 252KB for T5L1 and 764KB for T5L2.
0x0C	0x03	ICON_ID	2	Icon (page) ID.
0x0E	0x04	(Xs,Yx, Xe,Ye)	8	On the current page, the icon page displays the area.
0x16	0x08	Reserved	9	

## 7.9.2 Software Setting

**Icon Page Trans**

X 242 Y 15  
W 115 H 33 ☐ Locked

Name: Icon Page Tran

SP (0x): FFFF

VP (0x): 5830

Icon File: 48.icl

Icon ID: 29

Display Mode: Transparence

Filter Set: 0


Initial value: 0

**Annotations:**

- Coordinates of the upper left corner of the display area
- Display area width and height
- Variable storage space user can use address range arbitrarily: 0x1000-0xFFFF. The bit variable occupies a Max. of 3 space addresses. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.
- It is recommended to start at position 48 and summarize it into an ICL file. Generate it in advance and put it into DWIN\_SET folder.
- Make "huge" pictures into icon library to call.
- Transparent is the filter background color. That is, the background is not displayed. Otherwise, the background is displayed.
- The range is 00-63. The higher the value, the stronger the the filter background color.
- For horizontal or vertical movement, it is recommended that the touch and display control keys are in the same direction.
- The initial icon displayed on power-on also requires CFG file 0x05, 5 digits, write 1 to load 22 files, 0x05 digits can write 0x38, which means that 22 initial value files are loaded, data upload is enabled, and touch audio is enabled.

## 7.9.3 JPEG icon page pan setting considerations

(1) There can be multiple long-sliding slide pictures, ID range: 1000-1023. For example, there are three strip icons of 1000/1001/1002, the three icons can be generated as one ICL file, or three can be generated separately. When generating the ICL file, the JPEG file size of the DGUS software compressed ICON icon page cannot exceed the hardware limit: 252KB for T5L1 and 764KB for T5L2.

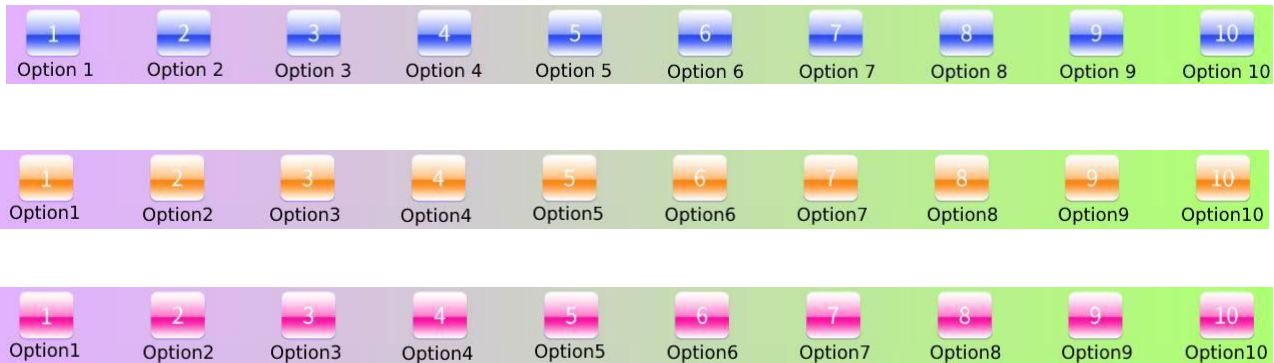

(2) The maximum size of a long bar icon is 4079\*4079, and it is recommended to be within 4000\*4000. The larger the area, the larger the volume. Sliding only supports vertical or horizontal sliding, and does not support 45-degree side sliding. Do the chart when the height of the long bar icon and the height of the sliding box can be made consistent, a little higher can be, try not to be too high.



(3) The sliding icon selection touch control does not need to be exactly the same size as the sliding page translation, that is, the coordinate points do not need to be completely aligned.



(4) Only the touch control is supported on the long bar sliding page, and the display control is not supported, and the button effect is not supported, because the No. 32 background image does not contain the 1000 long bar icon page.

(5) On the long sliding page, the button value is usually used to return to the menu selection, and the key value can be uploaded. Combined with variable icons, it is used in such scenarios as menu selection and function selection. You can also use basic touch to make sliding selection to turn pages, but the number of sliding selection items is unpredictable when you use it for the first time, which will affect the selection to a certain extent, and you can choose it yourself when you use it.

## 7.9.4 Example of Instructions




Set the variable address to 0x5830 and use the Return Key Code Control on the long bar icon.

5A A5 06 83 5830 01 0001; return key value 1

5A A5 06 83 5830 01 0002; return key value 2

5A A5 06 83 5830 01 0003; return key value 3

## 7.9.5 Effect

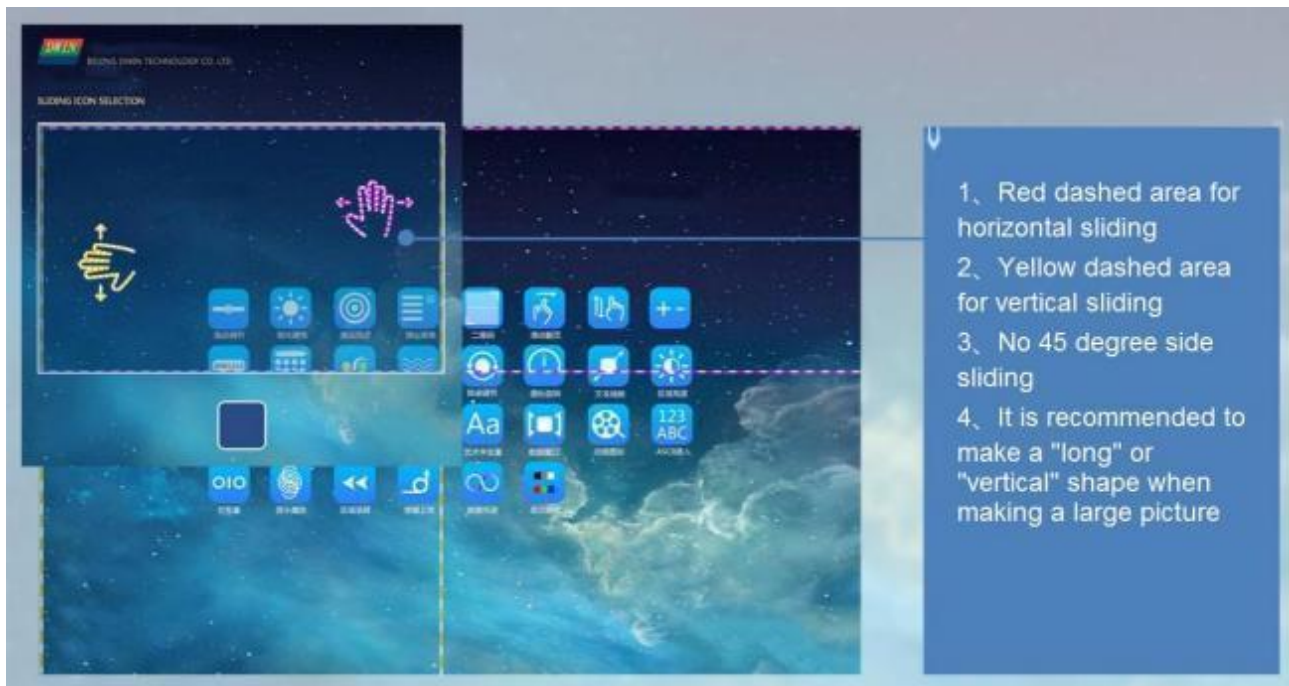



## 7.10 Icon Overlay

### 7.10.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A08	2	
0x02		*SP	2	Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x0009	2	
0x06	0x00	*VP	2	JPEG variable data pointer, must be even. VP: write 0x5AA5 means JPEG data is valid and display is on. VP+ 1: JPEG data buffer word (Words) length, must be even. VP+ 2: JPEG data start.
0x08	0x01	(x, y)	4	The display position of the JPEG icon on the current page.
0x0C	0x03	Wide_X	2	The width of the display window of the JPEG icon on the current page.
0x0E	0x04	Wide_Y	2	The height of the display window of the JPEG icon on the current page.
0x10	0x05:H	Dim_Set	1	Display brightness of the overlaid JPEG icons, 0x00 (darkest) - 0xFF (brightest).
0x11	0x05:L	Disp_Mode	1	Display modes. 0 x00 = JPEG icon transparently displayed ( icon background is not displayed). Other = JPEG icon background is displayed. <b>FSK bus camera display is 0x01.</b>
0x12	0x06:H	Filter_Set	1	The intensity of the background color filtering is 0x01- 0x3 F when the JPEG icon is displayed transparently.
0x13	0x06:L	*VP_Page	1	<b>. 7 JPEG data storage format setting.</b> <b>0=sequential (D3:D0=0xFFD8FFD0), 1=inverse order (D0:D3=0xFFD8FFE0).</b> <b>FSK bus camera data is selected in inverse order.</b> <b>.6-.4 reserved, write 0.</b> <b>. 3-.0 variable memory page address, 0x00-0 x0F, which forms a 2 0 bit variable pointer together with * VP, corresponding to 2 Mbytes of variable memory space.</b>
0x14		Reserved	12	

## 7.10.2 Software Setting

X

396

Y

171

W

243

H

163

Locked

Name

Icon Overlay

SP

FFFF

VP

4000

ICON brightness

255

Display Mode

FSK camera

Filter Set

0

JPEG data storage format

Inverse order

VP page

0

Coordinates of the control upper left corner

Control width and height

Set SP by default or actual needs.

Variable storage space range available to user: 0x1000-0xFFFF. Icon overlay occupies 120KB at most, and not relevant controls should be spaced out. System variable interface address range: 0x0000-0X0FFF.(e.g. page switch address 0x0084)

Display the overlaid JPEG icon from the variable buffer to the specified area of the current page, and display brightness and transparency can be set. VP (must be even) = 5AA5 to turn on the display, vp+1 = JPEG data buffer word length (even), vp+2 = JPEG data start storage.

JPEG icon brightness: 0x00(darkest)-0xFF(brightest)

0x00 = JPEG icon transparently displayed (icon background is not displayed). Other = JPEG icon background is displayed.

FSK bus camera display is 0x01.

The background color filtering is 0x01-0x3F when the JPEG icon is displayed transparently.

.7 JPEG data storage format setting.

0=sequential (D3:D0=0xFFD8FFD0), 1=inverse order (D0:D3=0xFFD8FFE0).

FSK bus camera data is selected in inverse order.

.6-.4 reserved, write 0.

.3-.0 variable memory page address, 0x00-0x0F, which forms a 20bit variable pointer together with \*VP, corresponding to 2MBbytes of variable memory space.

### 7.10.3 Effect

Camera module consists of OV2640 camera + T5L0 driver board + FSK bus.

The supporting camera module finished products have included OV2640 camera and die sinking.

FDV200-1: no infrared. The left camera below is the actual object

FDV200-2: with infrared.



Camera + smart screen physical front view



Camera + smart screen physical back view

## 7.10.2 Example of Instructions

Example1: Each instruction can be sent as 240- byte length data.

```
5A A5 F3 82 80 00 FF D8 FF E0 00 10 4A 46 49 96 00 01 01 01 00 60 00 60 00 00 FF DB 00 43 00 08 06 06 07 06
05 08 07 07 07 09 09 08 0A 0C 14 0D 0C 0B 0B 0C 19 12 13 0F 14 1D 1A 1F 1E 1D 1A 1C 1C 20 24 2E 27 20 22
2C 23 1C 1C 28 37 29 2C 30 31 34 34 34 1F 27 39 3D 38 32 3C 2E 33 34 32 FF DB 00 43 01 09 09 09 0C 0B 0C 18
0D 0D 18 32 21 1C 21 32 32 32 32 .....
```

( The DGUSII screen will have a response "5 A A5 03 82 4F 4B", and the next one can be sent immediately after receiving the response. In fact, the T5L uses a 20 ms refresh rate mechanism . In the case of using a baud rate of  $\leq 115200$ , sending data continuously will not cause serial port busy processing)


Example2: The address is incremented in sequence according to the word length of 120 (78 h).

```
5A A5 F3 82 80 78.....
```

Send several packets of data in turn...

The last line less than 240 bytes can be complemented with "00 00" at the end

The figure below is the specific data of the JPEG image viewed with " UltraEdit-32 " software.

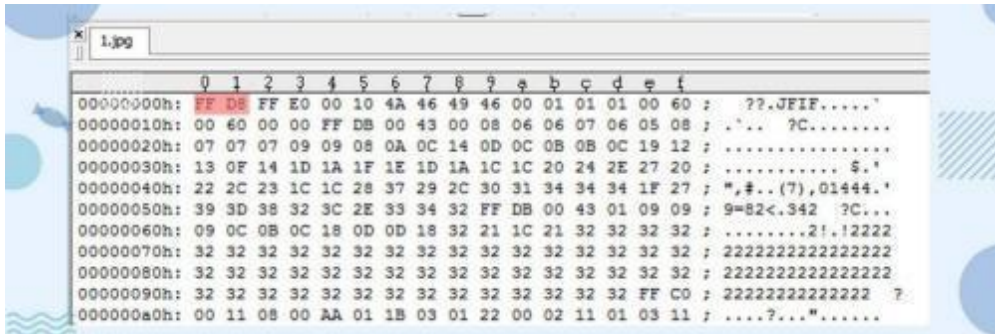

Step 3: Send the display instruction.

```
5A A5 07 82 7FFE 5AA5 8000
```

In fact, "0x8000 " refers to the length of the buffer, JPEG data stream ( 0xFFD8 . . . 0xFFD9 ) file format, the bottom layer will judge and process automatically. User does not need to worry about the redundant data in the cache address later.

## 7.10.3 Effect



## 7.11 Batch Variable Icon

### 7.11.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A09	2	
0x02		*SP	2	Parameter pointer. 0xFFFF: Disables SP ( no run- time modification).
0x04		0x0006	2	
0x06	0x00	*VP	2	Variable pointer, must be even. D3: 0x5A = enable the display, others = disable the display. D2: displayed ICON ID, range 0-N. D1: display mode, only works for the display of background copy . 7 filter switch 0= open filter, 1= display background. 6 reserved,0. 5-.0 filter set value 0x01-0x3F. D0: brightness of ICON, only works for the display of background copy. If the brightness of ICON is not set to 0xFF, the icon will display together with background, and the display speed will be slower about 30% .
0x08	0x01	*VP1	2	The data corresponds to the icon display position description pointer, which must be an even number, and each icon has 2 addresses: D3:D0: coordinates (x, y) of the upper left corner of the icon display position; The data is described in sequence according to the data source number (0-(Data_Num-1)).
0x0A	0x02	*VP2	2	Each icon data description pointer to be copied must be an even number, and each icon has 4 addresses: D7:D4: coordinates of the upper left corner of the icon (x, y); D3:D2: icon width pixel value; D1:D0: icon height pixel value; Data are described sequentially by icon number (0-N).
0x0C	0x03	Data_Num	2	*The number of data items corresponding to VP, 0x0000-0x1000, up to 4096 data items.
0x0E	0x04:H	Icon_Source	1	0x00: current display page (video memory mode). Other: icon background image (Flash read).
0x0F	0x04:L	Icon_Lib	1	Icon background image mode only: The ICL file number of the icon background image.
0x10	0x05	Icon_ID	2	Icon background image mode only: ID number of the icon background image in the ICL file.
0x12	0x06	Reserved	14	

**Estimated processing time in icon background image mode** (Copy the specified area from the icon patch background image saved in Flash and display it to the current page):

$T = (\text{number of valid data items} + 5) * \text{image background image pixels} / 400 + \text{icon pixels corresponding to valid data items} / 200 \text{ uS.}$

Example:

Assuming that each data has 8 different icons to choose from. A single icon is 64\*64 pixels, spliced into a 560\*64 background image, and there are 100 data items to be displayed. Then the processing time is  $105 * 560 * 64 / 400 + 100$



$64 \times 64 / 200 = 11.456 \text{ mS}$ , In the video memory mode, it is 5.12 mS.

**Estimated processing time in video memory mode** (copy the specified area from the currently displayed page to the current page):

$T = \text{icon pixels corresponding to valid data items} / 80 \text{ uS}$ .

Example:

Assuming that each data has 8 different icons to choose from, a single icon is  $32 \times 32$  pixels, has been displayed on the current page, and there are 1000 data items to be displayed, then the processing time is  $1000 \times 32 \times 32 / 80 = 12.80 \text{ Ms}$ . In the icon back ground image mode, it is 30.848 mS.

In the video memory mode, the speed is fast, and it needs to occupy a certain area of the display area to display the icons to be copied, and restore the background after use.

In the icon background image mode, it is suitable when there are not too many data items and the resolution of the icon background image is not high.



## 7.12 Data Variables

The data variables control is to display a data variable according to the specified format (integer, decimal, whether with AICII unit or not) with Arabic numerals with specified font and size.

### 7.12.1 Instruction Storage Format

The instruction storage format is shown in the table.

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A10	2	
0x02		*SP4	2	Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D	2	
0x06	0x00	*VP	2	Variable pointer.
0x08	0x01	X, Y	4	The starting display position, which displays the coordinates of the upper left corner of the string.
0x0C	0x03	COLOR	2	Display Color
0x0E	0x04:H	Lib_ID	1	ASCII font location
0x0F	0x04: L	Font size	1	The number of dots in the x- direction of the character.
0x10	0x05:H	Alignment	1	0x00=left-aligned 0x01=right-aligned 0x02=centered
0x11	0x05:L	Integer digits	1	Display integer digits. The sum of integer digits and decimal digits cannot exceed 20.
0x12	0x06:H	Decimal places	1	Display integer digits. The sum of integer digits and decimal digits cannot exceed 20.
0x13	0x06:L	Variable data type	1	0x00: Integer (2 bytes). Range: -32768 ~ 32767 0x01: 32-bit Integer (4 bytes). Range: -2147483648 ~ 2147483647 0x01 = long integer (4 bytes) in the range -2147483648 to 2147483647 0x02=* VP high byte, unsigned, range 0 to 255 0x03=*VP low byte, unsigned, range 0 to 255 0x04=very long integer (8 bytes), the range is -9223372036854775808 to 9223372036854775807 0x05=unsigned integer (2 bytes), range 0 to 65535 0x06=unsigned long integer (4 bytes) in the range 0 to 4294967295
0x14	0x07:H	Len_unit	1	Variable unit (fixed string) display length, 0x00 means no unit display
0x15	0x07:L	String_Unit	Max11	Unit string, ASCII encoding.

## 7.12.2 Software settings

Parameter	Description
X 157, Y 45	Coordinates of the control upper left corner
W 100, H 40	Control width and height
Locked	
Name Data variables	
SP (0x) FFFF	Set SP by default or actual needs
VP (0x) 5420	Variable storage space range available to user: 0x1000-0xFFFF. Data variable occupy 1/2/4 addresses depending on the variable type. That is, the addresses of non-associated controls need to be spaced apart. System variable interface address range: 0x0000-0xFFFF
Show colour FFFF	
Word bank ID 0	Set by default or actual needs
Font size 20	Set by default or actual needs
Alignment Left	No.0 font library size: 4*8-64*128
<input type="checkbox"/> Automatic Character Spacing Adjustment	Set by default or actual needs
<input type="checkbox"/> Display Invalid Zero	If checked, the character spacing will be reduced
Variable type Int (2 bytes)	If checked, the instruction 5AA5 05 82 5420 0008 is displayed as 0008, otherwise it is 8
Integer digits 3	Select the appropriate variable type according to the data range
Decimal digits 0	If integer digit is 2 and decimal digits is 1, then the instruction 5AA5 05 82 0064 will display 10.0
Variable unit length 0	
Show unit	Set by default or actual needs
Unit character string, ASCII code	
Initial value 0	The initial value displayed at power-up. Requires CFG file 0x05.5 bit being 1 to load 22 file. For example, writes 0x38 in 0x05 to indicate loading 22 file, turning on data upload and touch.

### 7.12.3 Example of Instructions

The variable address range is 0x1000-0xFFFF, and the instruction data is in hexadecimal format.

(1) Display integer data 100.

5AA5 05 82 5420 0064

0x5AA5A5: Frame header;

0x05: Data length, which is the 5 bytes of 82 54 20 00 64;

0x82: Write instruction;

0x5420: VP;

0x0064: Data 100. Integer range: -32768 to 32767, occupying 2 bytes.

(2) Display 3 data by one instruction. (The addresses must be continuous)

5A A5 09 82 53 00 00 64 00 63 00 62

0x5AA5A5: Frame header;

0x09: Data length, indicating the number of bytes containing data after 0x09;

0x82: Write instruction;

0x5300: VP;

0x0064: Data 100 (to 0x5300 address);

0x0063: Data 99 (to 0x5301 address);

0x0062: Data 98 (to 0x5302 address).

(3) Display long integer data 100 .

5A A5 07 82 54 22 00 00 00 64

0xA5: Frame header;

0x07: Data length;

0x82: Write instruction;

0x5422: VP;

0x0000 0064: Long integer data 100. The long integer ranges from -2147473648 to 2147483647, which occupies 4 bytes, and the bits that are not enough are filled with 00.

(4) Display ultra-long integer data 100

5A A5 0B 82 54 24 00 00 00 00 00 00 00 64

0x5AA5: Frame header;

0x0B: Data length;

0x82: Write instruction;

0x5424: VP;

0x0000 0000 0000 0064: Data 100. The ultra-long integer range ranges from -9223372036854775808 to 9223372036854775807, which occupies bytes, and the bits that are not enough are filled with 00.

(5) Display single- precision floating- point number data

99 5A A5 07 82 54 28 42 C6 00 00

0x5AA5: Frame header;

0x07: Data length;

0x82: Write instruction;

0x5428: VP;

0x42C6 0000: Single-precision floating-point number 99, which can be converted by floating- point number conversion tool.

(6) Display double- precision floating- point number data 99

5A A5 0B 82 54 2B 40 58 C0 00 00 00 00 00

0x5AA5: Frame header;

0x0B: Data length;

0x82: Write instruction;

0x542B: VP;

0x4058: C000 0000 0000 Double-precision floating-point number 99, which can be converted by floating-point conversion tool.

(7) Display integer type data - 100 5A A5 05 82 53 00 FF 9C

0x5AA5: Frame header; 0x05: Data length;

0x82 instruction;

0x5300: VP;

0xFF9C: negative number 100. The complement code of a negative number: The sign bit is 1, and the remaining bits are the bit wise NOT of the original code absolute value. Then the entire number is incremented by 1. If entering -200, it will return 5A A5 06 83 68 20 01 FF 38, and the returned data 0xFF38 is the entered data -200.

(8) Display 2 decimal places

Sending 5A A5 05 82 5300 0064 will display 100.

Sets the integer digit of the data variables control to 1 and the decimal digit to 2.

(9) Change the data color

5A A5 05 82 9003 F800

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x9003: means the SP is offset by 3 bits;

0xF800: Color code.

(10) Change the data coordinates

5A A5 07 82 900 10064 0064

0x5AA5: Frame header;

0x07: Data length;

0x82: Write instruction;

0x9001: Indicates that the SP is offset by 1 bit based on 0x9000. Refer to the 7.12.1 Instruction Storage Format for more details;

0x0064: The data is offset to the (100, 100) coordinates.

(11) Change the font size

5A A5 05 82 90040028

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x9004: Indicates that the description pointer is offset by 4 bits based on 0x9000;

0x0028: The high byte 0x00 is the position of font 0, just write 0x00, and the low byte 0x28 is the font size.

(12) Change the integer digits to 3 digits

5A A5 05 82 90050003

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x9005: Indicates that the description pointer 0x9000 is offset by 5 bits;

0x0003: The high byte 0x00 is left-justified, and the low byte 0x03 is an integer number of bits.

(13) Change the number of decimal places to 2

5A A5 05 82 9006 0200

0x5AA5: Frame header;

0x05: Data length; 0x82: Write instruction;

0x9006: Indicates that the description pointer is offset by 6 bits based on 0x9000;

0x0200: The high byte 0x02 is the number of decimal places, and the low byte 0x00 indicates that the data type is an integer.

## 7.13 Text Display

The text display control is to display the character string in the specified text box display area according to the specified format (determined by selecting the font library).

This control is usually used with the text input control.

### 7.13.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A11		
0x02		*SP		Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D		
0x06	0x00	*VP	2	Text pointer.
0x08	0x01	(X, Y)	4	The starting display position, which displays the coordinates of the upper left corner of the string.
0x0C	0x03			Display text color
0x0E	0x04	(Xs, Ys)(Xe, Ye)	8	Text box.
0x16	0x08	Text_ Length	2	Display the number of bytes, when it encounters 0xFFFF, 0x0000 or displays to the end of the text box, it will no longer be displayed.
0x18	0x09:H	Color	2	The font location used by ASCII characters when the encoding method is 0x01-0x04.
0x19	0x09:L	(Xs, Ys)(Xe, Ye)	8	Font location for non-ASCII characters when the encoding is 0x00, 0x05, and 0x01-0x04.
0x1A	0x0A:H	Text_ Length	2	The number of dots in the x direction of the font (0x01-0x04 mode, the number of dots in the x direction of ASCII characters is calculated as x/2).
0x1B	0x0A:L	Font0_ID	1	The number of dots in the Y direction of the font.
0x1C	0x0B:H	Encode_ Mode	1	Character spacing mode is defined by bit .7 = 0 character spacing is automatically adjusted; .7 = 1 The character spacing is not automatically adjusted, and the character width is fixed to the set number of dots. .6-.0 defines how the text is encoded: 0 = 8 bit code 1=GB2312 Inner code 2=GBK 3=BIG5 4=SJIS 5=UNICODE
0x1D	0x0B:L	HOR_Dis	1	Characters are spaced horizontally.
0x1E	0x0C:H	VER_Dis	1	Characters are spaced vertically.
0x1F	0x0C:H	Undefined	1	Write 0x00.




### 7.13.2 Software Setting

Open DGUS, click display control-text display, then set the control display area, and configure parameters in the setting menu on the right.

The number of dots in the Y direction of the font must be even.

DGUS screen is pre-installed with 0# font library, including all ASCII characters of 4\*8~64\*128 dot matrix.

<p><b>Text display</b></p> <p>X 102 Y 155</p> <p>W 207 H 207</p>	<p>Coordinates of the upper left corner of the display area</p> <p>Display area width and height</p>
<p>Name definition Text</p>	
<p>Description pointer(0x) FFFF</p>	<p>The pointer address is set by default or according to need.</p>
<p>Variable address(0x) 5020</p>	<p>The variable storage space user can use the address range arbitrarily: 0×1000-0×FFFF. The text display occupies the address according to the length of the text setting. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0×0000-0×0FFF (such as page switching address 0×0084)</p>
<p>Display color(0x) FFFF</p>	
<p>Encoding 0x02=GBK</p>	<p>The encoding method is determined when the font is generated, and the factory font encoding is GBK.</p>
<p><input checked="" type="checkbox"/> Character spacing is not automatically adjusted</p>	<p>Checked: DWIN 1 2 Unchecked Effect: DWIN 12</p>
<p>Text length 200</p>	<p>Take bytes as the unit, here is set to display 200-byte length data. The text display can display up to 512 (words, Word).</p>
<p>FONT0_ID 0</p> <p>ASCII font position when encoding method is 0×01-0×04</p>	<p>ASCII font location, default font 0 or set according to needs.</p>
<p>FONT1_ID 23</p> <p>Non-ASCII characters with encoding methods 0×00, 0×05 and 0×01-0×04 use fonts</p>	<p>Non-ASCII font location, set the font ID according to your needs. Put it in the DWIN_SET folder in advance. For example, 23_GBK24 Song Ti: It means that the font ID is 23, 24*24 dot matrix, and the encoding method is GBK, Simsun.</p> 
<p>Number of dots in X direction 24 4-255</p>	<p>The size of the dot matrix in the X and Y directions of the font library cannot be set arbitrarily. Otherwise, it will display garbled characters. For example, the font library No. 23 above is a 24*24 dot matrix, which is the setting parameter for this. The number of dot matrix in the Y direction must be an even number when generating the font library.</p>
<p>Number of dots in Y direction 24 4-255</p>	
<p>Horizontal interval 0</p>	<p>Horizontal interval 0 display effect: DWIN Horizontal interval 20 display effect: D W I N The vertical interval is the vertical interval.</p>
<p>Vertical interval 0</p>	
<p>Initial value</p> <p>Being DWIN Technology is the research and development center, Hunan DWIN Technology is the manufacturing center</p>	<p>The initial icon displayed on power-on requires CFG file 0×05.5 bit to write 1 to load 22 files, 0×05 bit can write 0×38, which means to load 22 initial value files, data upload, and start touch audio.</p>

### 7.13.3 Example of Instructions

#### ① Display "North 12AB"

5AA5 0E 82 5020 4E6F 7274 68 3132 4142 FFFF

0x5AA5: Frame header;

0x0E: Data length;

0x82: Write instruction;

0x5020: VP;

0x4E6F 7274 68: ASCII code of "North";

0x3132: ASCII code of "12";

0x4142 "AB" ASCII code. The ASCII code can be converted by an ASCII conversion tool. 0xFFFF is the end character, and the data after the end character is no longer displayed.

#### ② New line display.

5A A5 05 82 5023 0D0A

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5023 start from the address and display in a new line;

The ASCII code of 0x0D0A line feed can be converted by an ASCII conversion tool.

#### ③ Clear the text display.

5A A5 07 82 5020 2020 2020

0x5AA5: Frame header;

0x07: Data length;

0x82: Write instruction;

0x5020: VP;

0x20: ASCII code of space, 2020 clears the data of an address. Clear the data of 2 addresses starting from address 5020.

#### ④ Change the text color

5A A5 05 82 8803 F800

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8803: description pointer 0x8800 base address offset by 3 bits to change the color; for the offset address, please refer to the SP description pointer offset in the text display instruction storage format table; for the description of the pointer usage, please refer to the section 7. 12 Data Variables.

0xF800: Color value.



## ⑤ Hide text

### Method 1: Hide

5A A5 05 82 8800 FF00

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8800: SP;

0xFF00: Hidden text.

Display after hiding:

5A A5 05 82 8800 8070

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8800: SP;

0x8070: VP.

### Method 2: Modify the coordinates

5A A5 07 82 8801 02D0 02D0

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8801: SP;

0x8800: SP 0x8000 base address offset by 1 bit to change the display coordinates;

0x02D0: (720,720) coordinate point, moved beyond the boundary to a invisible place.

Display after hiding:

5A A5 07 82 8801 0064 0064

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8801: SP;

0x8000: Base address offset by 1 bit to change the display coordinates;

0x0064: (100, 100) coordinate point, move beyond the boundary to a visible place.

Method 3: Change the display length to 0000

5A A5 05 82 8808 0000

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8808: SP;

0x8000 Base address offset by 8 bit to change the display coordinates;

0x0000: Displays 0 bytes of data.

Display after hiding:

5A A5 05 82 8808 0064

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x8808: SP;

0x8000: Base address offset by 8 bit to change the display coordinates;

0x0064: Displays 100 bytes of data.

#### 7.13.4 Effect



## 7.14 RTC Display

The RTC display control is to display the Gregorian calendar RTC in text according to the format edited by the user.

### 7.14.1 Text RTC Instruction Storage Format

(1) Display current date and/or time, in digital format by the internal RTC.

SP offset	Definition	Length (bytes)	Description
0x00	0x0000	2	0x0000
0x01	(X, Y)	4	Display position, display the coordinates of the upper left corner of the string.
0x03	Color	2	Text color.
0x04:H	Lib_ID	1	Index in the FLASH memory of the ASCII font library.
0x04:L	Font_Width	1	Font width, in pixels.
0x05	String_Code	MAx16	Display format string. Use ASCII characters and the Field Codes on the following table. E.g. If current time =2012-05-02 12:00:00 Wednesday, then in Y-M-D H: Q: S 0x00 mode, it will display "2012-05-02 12:00:00" . And in M-D W H: Q 0x00 mode, it will display "05-02 WED 12:00" .

(2) RTC code.

Explanation	Code	Display Format
Gregorian_ Year	Y	2000-2099
Gregorian_ Month	M	01-12
Gregorian_ Day	D	01-31
Gregorian_ Hour	H	00-23
Gregorian_ Minute	Q	00-59
Gregorian_ Second	S	00-59
Gregorian_ Week	W	SUN MON TUE WED THU FRI SAT
End of encode	0x00	



## 7.14.2 Text RTC Software Setting

Open DGUS, click display control – RTC display, then set the control display area, and configure the font library and time format in the setting menu on the right.

The time can be modified through the RTC setting or using UART instructions.

Instruction	Code
Year	Y
Month	M
Day	D
Hour	H
Minute	Q
Second	S
Week	W

Coordinates of the upper left corner of the display area

Display area width and height

The pointer address is set by default or according to need

Set by default or according to need

Set by default or according to need

Display data size

Separate data display settings: do two RTC displays  
The first data format deletes the hour, minute, second and week, and the second date format deletes the year

Data format  
**Y-M-D**

Data format  
**H:Q:S W**

To display in this way, display 6 RTCs, and display the chinese year, month, day, hour, minute, and second on the basemap.  
The first control key is reserved for Y years; the second control key is reserved for M month; the third control key is reserved for D day;  
When the fourth control key only keeps H, the fifth control key only keeps hour 0 minutes; the sixth control key only keeps hours S minutes.

## 7.14.3 Text RTC Effect





## 7.14.4 RTC Display(watch)

The RTC display (watch) uses icon rotation to display the RTC of the Gregorian calendar.

### 7.14.4.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A12		
0x02		*SP		Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D		
0x06	0x00	0x0001	2	
0x08	0x01	(X, Y)	4	The center of a clock dial.
0x0C	0x03	Icon_Hour	2	ID of pointer ICON, 0xFFFF indicates that the hour hand is not displayed.
0x0E	0x04	Icon_Hour_Central	4	Position of the center of rotation of the clockwise icon.
0x12	0x06	Icon_minute	2	ID of the minute hand ICON. 0xFFFF indicates that the minute hand is not displayed.
0x14	0x07	Icon_Minute_Central	4	Rotation center position of minute hand ICON.
0x18	0x09	Icon_Second	2	The ID of the second hand icon; 0xFFFF indicates that the second hand is not displayed.
0x1A	0x0A	Icon_Second_Central	4	Position of rotation center of second hand ICON.
0x1E	0x0C:H	Icon_Lib	1	ID of the icon library file where the pointer icon resides
0x1F	0x0C:L	Undefined	1	Write 0x00

### 7.14.4.2 Software Setting

The coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

It is recommended to start at position 48 and aggregate it into a .ICL file. Pre-generated into the DWIN\_SET folder.

Hour hand icon while loading

#### 7.14.4.3 Example of Instruction

Display time October 1, 2050 11: 12: 13

5A A5 0B 82 009C 5A A5 32 0A 01 0B 0C 0D

0x5AA5: Frame header;

0x0B Data length;

0x82: Write instruction;

0x009C: VP; this address is fixed and cannot be customized. For details, please refer to the section7 . 0x9C address definition;

0x32 year, 0x0A month, 0x01 day, 0x0B hour, 0x0C minute, 0x0D second.

#### 7.14.4.4 Effect



## 7.15 HEX Data

The HEX data control displays variable data in byte HEX intervals with user-specified ASCII characters. It is mostly used for timing display.

For example, 1234 is displayed as 12:34.

### 7.15.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A13	2	
0x02		*SP	2	Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D	2	
0x06	0x00	*VP	2	Variable data string pointer.
0x08	0x01	X,Y	4	Display the starting position, and display the coordinates of the upper left corner of the string.
0x0C	0x03	Color	2	Font color.
0x0E	0x04:H	Mode	1	.7: Data BCD code adjustment enable, 0=adjustment off, 1=adjustment on. When the BCD code adjustment is enabled, 0x0A will be adjusted to 0x10 and displayed as 10. .6-.4: Reserved, write 0. .3-.0: The number of bytes displayed from the high byte of *VP pointer, 0x01-0x0F
0x0F	0x04:L	Lib_ID	1	Font location; the font must be in half-width format. If Lib_ID is not 0, the font must use 8bit encoding.
0x10	0x05:H	Font_x	1	The number of dots in the X direction.
0x11	0x05:L	String_Code	MAX15	The encoding string is used to combine with the time variable to produce the display format required by the client. After each BCD time code is displayed, an ASCII character will be taken out in sequence from the encoded string characters to display at intervals. In encoded strings, special characters are defined as follows: 0x00: invalid, this character will not be displayed, and the two BCD time codes will be displayed together; 0x0D: Newline display, that is, X=Xs, Y=Y+Font_X*2

## 7.15.2 Software Setting

**HEX Var**

X: 341 Y: 80  
W: 94 H: 96 ☐ Locked

Name: HEX VAR  
SP: FFFF  
VP: 5434  
Color: FFFF  
Font\_Lib\_ID: 0  
Font Size: 20  
Byte\_Num: 4  
Adjust "enable" by BCD code: Off  
Encoding String: ...  
Input Hex. Data: 3A3A3A  
Convert  
The number of bytes displayed from the VP high bytes

- Coordinates of the upper left corner of the display area
- Display area width and height
- Set by default or actual needs
- The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The time variable occupies a Max. of 8 address spaces. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFFF.
- Set by default or actual needs
- Set by default or actual needs. If the font location is not 0, the font must use 8-bit.
- The number of dots in the X direction of the font. Size range of dot matrix of font 0: 4\*8-64\*128.
- Byte length, range: 0x00-0x0F
- Send command: 5A A5 07 82 0B0B 0B0B  
Turn off the display effect: 0B:0B:0B:0B  
Turn on the display effect: 11:11:11:11
- Enter the ASCII characters to be displayed. Click Convert, and the corresponding ASCII code will be generated.

## 7.15.3 Example of Instruction

5A A5 07 82 5434 10 11 12 13

0x5AA5: Frame header;

0x07: Data length;

0x82: Write instruction;

0x5434: VP;

0x10 11 12 13: BCD code.

## 7.15.4 Effect



## 7.16 Text Scroll

Text scroll function is the variable data scroll display in the specified area with the specified direction .

### 7.16.1 Instruction Storage Format

SP offset	Definition	Length (bytes)	Description
	0x5A14	2	
	SP	2	The variable describes the pointer.
	0x000C	2	
0x00	VP	2	Text pointer, <b>must be an even address</b> . <b>The first 3 words of the text pointer must be reserved, and the user display text content is stored from (VP+3). Text must end with 0xFFFF or 0x0000.</b>
0x01:H	Rolling_Mode	1	Scroll 0x00: from right to left. 0x02: from bottom to top, <b>each line must end with 0x0D0A</b> as line division.
0x01:L	Rolling_Dis	1	Rolling space in a DGUS cycle, in pixel.
0x02:H	Adjust_Mode	1	0x00: Left-alignment. 0x01: Right-alignment. 0x02: Center-alignment. Rolling will stop when the text length smaller than text box. For scroll mode 0x02: The lower 4 bits are horizontal alignment mode: 0x0=left alignment 0x1=right alignment 0x2=center. The high 4bit is the vertical alignment mode when stopped: 0x0=top alignment 0x1=bottom alignment 0x2=center.
0x02:L	Run_Control	1	Run-control: 0x00=Normal scrolling 0x01=Pause 0x02=Off 0x03=Initialization (static display) 0x04=Continuous scrolling, no matter whether the content length is shorter than the text box or not.
0x03	Color	2	Text color.
0x04	Xs Ys Xe Ye	8	Text box.
0x08:H	Font0_ID	1	The location of ASCII characters in the font library when the encoding mode is 0x01-0x04. If the encoding mode is 0x00 or 0x05, do not set this parameter and write 0x00.
0x08:L	Font1_ID	1	The font location of non-ASCII characters when the encoding mode is 0x01 - 0x04. When the encoding mode is 0x00 or 0x05, the location of the character library used by the character is displayed.
0x09:H	Font_X_Dots	1	Font width, in pixels. Must be even. In encoding modes 0x01-0x04, must be twice the Width.
0x09:L	Font_Y_Dots	1	Number of font lattice in Y direction.
0x0A:H	Encode_Mode	1	Character spacing mode is defined by bit 7: 0: Automatic spacing. 7.1: Fixed spacing. Font encoding is defined by bits 6 to 0 0x00:8 bit. 0x01: GB2312. 0x02: GBK. 0x03: BIG5 0x04: SJIS 0x05: UNICODE.
0x0A:L	Text_Dis	1	Spacing between characters, in pixels.
0x0A:H	Speed_Set	1	Scroll speed setting, 0x00-0x0F, 0x00 is the fastest, 0x0F is the slowest.
0x0B:H	Undefined	3	0x00



## 7.16.2 Software setting

Roll Text	
X 533 Y 94	Coordinates of the upper left corner of the display area
W 157 H 48	Display area width and height
Name definition RollText	
Description pointer(0x) FFFF	
Variable address(0x) 6010	The variable storage space user can use the address range arbitrarily: 0×1000-0×FFFF. The text display occupies the address according to the length of the text setting. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0×1000-0×0FFF (such as page switching address 0×0084). The first 3 words of the text pointer must be reserved. The text content displayed by the user is stored from (VP+3). The text must end with 0×FF or 0×00.
Display color(0x) 0000	
Encoding 0x02=GBK	The encoding method is determined when the font is generated, and the factory font encoding is GBK.
<input checked="" type="checkbox"/> Character spacing is not automatically adjusted	Unchecked effect: DWIN 12      Checked effect: DWIN 12
Scrolling mode 0x00=	The text is displayed from right to left
Scroll pitch 2	The number of pixel dots for text scrolling in each DGUS cycle, 0 to stop scrolling
Alignment 0x00= Align left	The length of the set text content is greater than the length of the display box, otherwise the scrolling will stop. The alignment is valid when the text content is less than the length of the display box.
FONT0_ID 0	The position of the ASCII font library can be the default font size 0.
ASCII font position when encoding method is 0×01-0×04	
FONT1_ID 23	Non-ASCII font location, set the font ID according to your needs. Put it in the DWIN_SET folder in advance. For example, 23_GBK24 Song Ti: It means that the font ID is 23, 24*24 dot matrix, and the encoding method is GBK, SIMSUM.
Non-ASCII characters with encoding methods 0×00, 0×05 and 0×01-0×04 use fonts	
X direction array 24 4-255	
Number of dots in Y direction 24 4-255	The size of the dot matrix in the X and Y directions of the font library cannot be set arbitrarily. Otherwise, it will display garbled characters. For example, the font library No. 23 above is a 24*24 dot matrix, which is the setting parameter for this. The number of dot matrix in the Y direction must be an even number when generating the font library.
Character interval 0	Character interval 0 display effect: DWIN Character interval 20 display effect: DWIN
Initial value Set the length of the text content to be greater than the length of the display box, otherwise it will stop scrolling	The initial text displayed when the power is on, 0×B8 can be written in the ×08 position of the CFG file to enable data upload.

## 7.16.3 Examples of Instructions

5A A5 13 82 6013 BBB6 D3AD C0B4 B5BD B5CF CEC4 BFC6 BCBC

0x5AA5: Frame header;

0x13: Data length;

0x82: Write instruction;

0x6013: VP+3, address 0x6010 cannot be used directly;

0xBBB6 D3 AD C0 B4 B5 BD B5 CF CEC4 BFC6 BCBC, the ASCII code of "Welcome to DWIN Technology".



## 7.16.4 Effect



## 7.17 Data Window

The data window control displays the data variables in a specified display window, highlighting the selected values.

### 7.17.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A15	2	
0x02		*SP	2	Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D	2	
0x06	0x00	*VP	2	Data pointer, each data occupies 2 words storage space, defined as follows: VP=the storage address of the selected data, and the stored data is a fixed-point integer.
0x08	0x01	V_Min	2	Data lower limit, fixed-point integer.
0x0A	0x02	V_Max	2	Data upper limit, fixed-point integer.
0x0C	0x03:H	NUM_I	1	Display integer digits, 0x00-0x05.
0x0D	0x03:L	NUM_F	1	Display decimal places, 0x00-0x05.
0x0E	0x04:H	NUM_Digit	1	Data window height: the number of all data groups displayed, must be an odd number, 0x03-0x07.
0x0F	0x04:L	Display_mode	1	Display mode: .0 1=Invalid 0 is displayed; 0=Invalid 0 is not displayed. .1 1=Positive "+" display; 0=Positive "+" not displayed. .2 1=Turn around after the data crosses the border (cycle) 0=Stop when the data crosses the border .3 1=automatic adjustment of display spacing 0=no adjustment of display spacing .4-.7 Undefined, write 0.
0x10	0x05	(X,Y)	4	Displays the center coordinates of the selected value.
0x14	0x07	Step_Adj	2	Adjustment step size, positive integer, 0x0001-0x7FFF.
0x16	0x08:H	Font0_X_Dots	1	Font size of unselected data: the number of dots in the X direction, 0x04-0x40.
0x17	0x08:L	Font0_Y_Dots	1	The number of lattice points occupied by the Y direction of the unselected data. 0x08-0xFF, not less than 2*Font0_X_Dots.
0x18	0x09	Font0_Color	2	Unchecked data display color.
0x1A	0x0A:H	Font1_X_Dots	1	The font size of the selected data: the number of dots in the X direction, 0x04-0x40.
0x1B	0x0A:L	Font1_Y_Dots	1	The number of lattice points occupied by the Y direction of the selected data. 0x08-0xff, not less than 2*Font1_X_Dots.
0x1C	0x0B	Font1_Color	2	The selected data display color.
0x1E	0x0C	Font_Lib	1	Font selection, the default is 0x00.
0x1F	0x0D	Undefined	1	Write 0x00.

## 7.17.2 Software Setting

**Data window**

X 133 Y 16  
W 83 H 39 ☐ Locked

Name Data Window

SP (0x) FFFF

VP (0x) 5652

Lower limit of data -100

Upper limit of data 100

Integer digits 3

Decimal digits 0

Display data amount 5

**Display mode**

☐ Display invalid

☐ Display positive (+)

☐ Cyclic data

☒ Automatic Character Spacing Ar

Font lib 0

Step length 1

**Data characteristics**

**Not select data**

X direction size 20

Y direction size 40

Show color FFFF

**Select data**

X direction size 30

Y direction size 60

Show color 07E0

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF.  
The data window indicates that it occupies 2 space addresses. That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF.

Data upper and lower limit range.

For example, if the integer digit is set to 2, the decimal place is set to 1, it will display 2 integers and 1 decimal. Write command: 5A A5 82 5420 0064 will be displayed as 10.0

Number of selected and unselected data displayed.



Set the integer digit to 3 digits, check the effect: 000, 001, 002; uncheck the effect: 0, 1, 2

A "+" sign will be displayed before a positive number is checked.

For example, after setting the data above to display 100, it will turn around from -100 to display.

The span of data increase or decrease once.  
Step 1 effect: 1, 2, 3, 4 changes; Step 2 effect: 2, 4, 6, 8 changes;

The dot matrix size of the data.  
The selected data can be set to a larger point for highlighting.



### 7.17.3 Examples of Instructions

5A A5 05 82 5652 0064

0x5AA5: Frame header

0x05 Data length

0x82: Write instruction

0x5652: VP

0x0064: Write data 100 to VP

### 7.17.4 Effect



## 7.18 DGUSII Text(Text Display Without Aliasing)


### 7.18.1 Instruction Storage Format

Address	SP offset	Definition	Length (Word)	Description
0x00		0x5A16	2	
0x02		*SP	2	Variable description pointer. 0xFFFF means loaded by the configuration file.
0x04		0x000D	2	
0x06	0x00	*VP	2	Text pointer, the maximum text length is 4Kbytes.
0x08	0x01	(X, Y)	4	Text display position: left- aligned mode, the coordinates of the upper left corner of the string.
0x0C	0x03	Color	2	Display text color.
0x0F	0x04	Undefined	2	Write 0x00
0x10	0x05	Xs, Ys Xe, Ye	8	Text box.
0x18	0x09	Text_ Length	2	Display the number of bytes, when it encounters 0xFFFF, 0x0000 or displays to the end of the text box, it will no longer be displayed.
0x1A	0x0A	LIB_ID	2	Font location for non- ASCII characters when the encoding is 0x00 , 0x05 , and 0x01 - 0x04.
0x1C	0x0B:H	Display_ Mode	1	.7 defines whether the character spacing of the text display is automatically adjusted. .7 = 0 Character spacing is automatically adjusted. .7 = 1 Character spacing is not automatically adjusted, character width is fixed. .6 - .0 defines the scale of the character display, 0x00-0x7F, unit 1/16. In fact, DGUS divide 155 steps according to 0.25-8.0 in 0.05 steps, and then converted to 1/16 data. The data is converted to 1/ 16 corresponding to 0x04-0x7F.
0x1D	0x0B:L	HOR_Dis	1	Characters are spaced horizontally.
0x1E	0x0C:H	VER_Dis	1	Characters are spaced vertically.
0x1F	0x0C:L	Align_Mode	1	Alignment mode: 0x00=left alignment 0x01=right alignment 0x02=center Right-aligned and centered modes are only valid for single-line display.



## 7.18.2 Software Setting

The screenshot shows the 'DGUSII Text display' configuration window. The settings are as follows:

- X:** 193, **Y:** 69 (Coordinates of the upper left corner of the display area)
- W:** 141, **H:** 154 (Display area width and height)
- Name:** Text
- SP (0x):** FFFF (The pointer address is set by default or according to need.)
- VP (0x):** 6050 (Variable storage space users can use address range arbitrarily: 0x1000-0xFFFF. The pop-up menu occupies 1 space address. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.)
- Text color(0x):** 0000
- ☒ **Set character interval Manually** (Checked: DWIN 1 2 Unchecked: DWIN 12)
- Text Length:** 20 (Take bytes as the unit, here is set to display 200-byte length data. The text display can display up to 512 (words, word).)
- FONT\_ID:** 0 (Non-ASCII font location, set the font ID according to your needs. Put it in the DWIN\_SET folder in advance. )
- Text zoom:** 100 % (100% is the dot matrix at the time of generation, e.g. 32\*32 above, and is scaled based on this dot matrix.)
- Horizontal interval:** 20 (Horizontal interval 0 display effect: **DWIN**; Horizontal interval 20 display effect: **D W I N**)
- Vertical interval:** 0 (The vertical interval is the vertical interval.)
- Initial value:** DWIN Technology (The initial value displayed by the power-up, CFG file 0X08 position can write 0xB8 to enable the initial value display.)

## 7.18.3 Example of Instructions

① Display "North 12 AB"

5AA5 0B 82 6050 B1B1 3132 4142 FFFF

0x5AA5: Frame header;

0x0B: Data length;

0x82: Write instruction;

0x6050: VP;

0xB1B1: ASCII code of the word "North";

0x3132: ASCII code of "12";

0x4142: ASCII code of "AB". ASCII code can be converted by ASCII conversion tool, which can be obtained from customer service;

0xFFFF: Terminator. Adding 0xFFFF to the end of the character data will not display the following characters.



## 7.18.4 Effect

Zoom ratio 100%, 200%, 300%, 400% effect.



## 7.18.4 Gray Word Library


You can use DGUS to generate text display dedicated gray word library.

Features:


- (1) It can be used to remove the jaggies from the edges of characters, and the edge is smoothly displayed.
- (2) T5L V45 and above kernel products support this display control.
- (3) 20 \* 20 dot matrix font size is 5.85 MB. You should choose the appropriate dot matrix size accordingly, and arrange reasonably the storage space in advance.
- (4) When using a large font size such as 24\*24 dot matrix (12 MB) or more, you need choose/customize products with expanded Flash(> 16MB).

If users want to generate a gray word library, please follow the steps below.


- (1) Open DGUS and click Gray Word Library Generator.

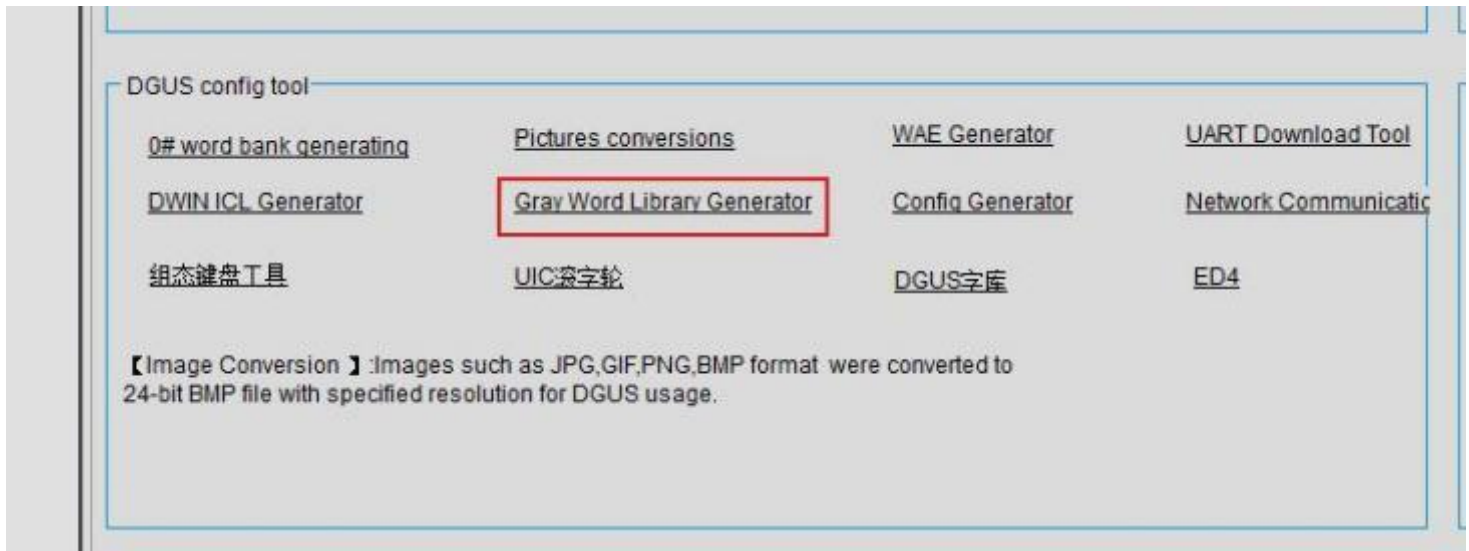

- (2) Select font size as you want and click generate.

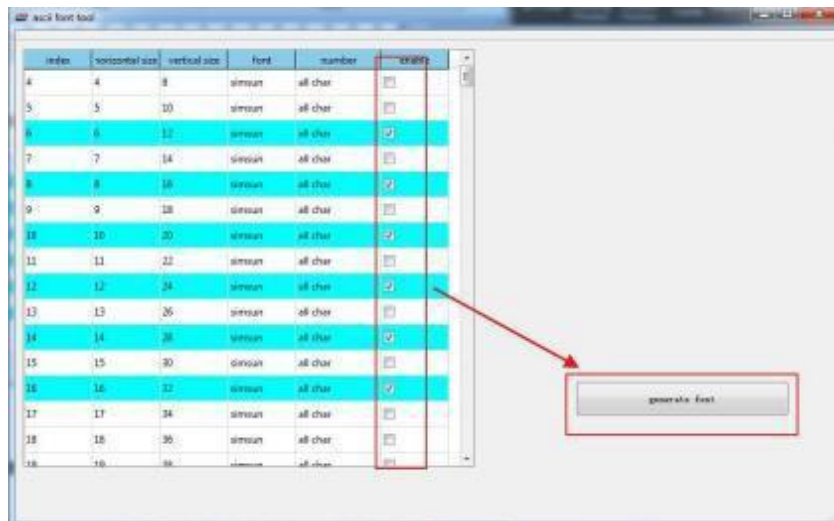

(3) Select the saving path, name it accordingly and click save.

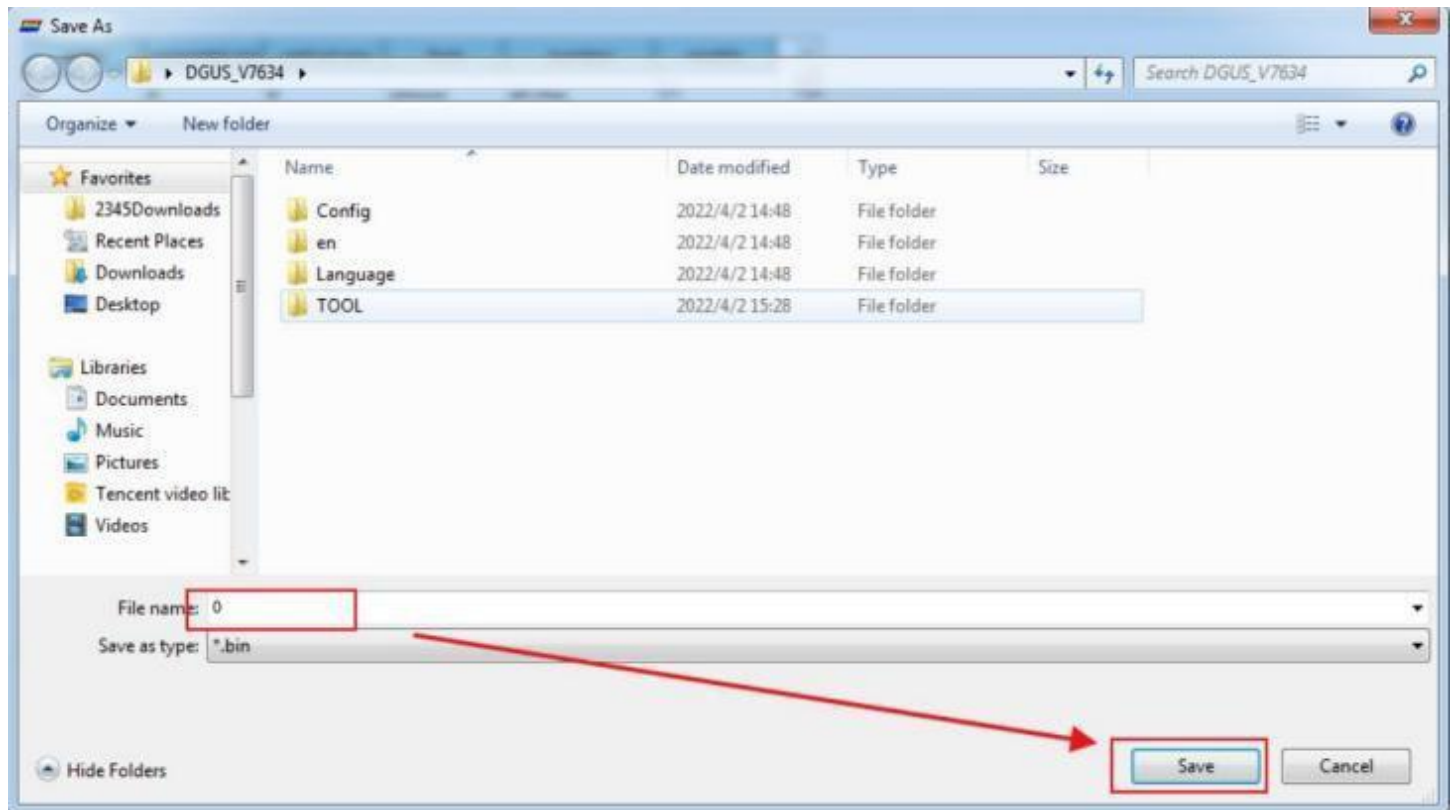

## 7.19 Roll Character

The characters are displayed in the form of a scroll, and the data can be changed in combination with sliding adjustment.

### 7.19.1 Instruction Storage Format

Address	SP Offset	Definition	Data length (byte)	Description
0x00		0x5A17	2	Variable pointer, the variable is a double word, the low word is reserved, and the high word is integer data -32768 to +32767.
0x02		SP	2	Lower limited.
0x04		0x000D	2	Upper limited.
0x06	0x00	VP	2	Data pointer. Each data occupies four words of storage space, defined as follows: VP= storage address of the selected data, VP+1 = adjustment parameter, corresponding to gesture adjustment VP+1 or incremental adjustment VP. VP+2 = System reserved, display offset, integer
0x08	0x01:H	Adj_Mod	1	The high 4 bit is the data type: 0x0=Integer (2 bytes), -32768 to 32767 0x1=* VP high byte, unsigned number 0-255 0x2=* VP low byte, unsigned number 0-255 0xE=* VP The data directly corresponds to the font ID 0-255, which is suitable for small screen input keyboard. 0xF=* VP data is an ASCII string pointer, and each line can contain up to 256 characters. The low 4 bit is (number of character lines-1)/2, 0x0-0x4, up to 9 lines.
0x09	0x01:L	Data_Mod	1	Data mode: The upper 4bit is the number of integers, 0x00-0x05. The lower 4bit is the number of decimal places, 0x00-0x05. String mode: character pointer interval (word length), 0x01 - 0xFF.
0x0A	0x02	VP_String	2	Data mode: interval step length of data variable, 0x0001- 0x7FFF. String pattern: The string variable storage pointer corresponding to the starting value (0x00), 0xFF represents the end of data.
0x0C	0x03	V_Min	2	The lower limit of the data, fixed- point integer.
0x0E	0x04	V_Max	2	The lower limit of the data, fixed- point integer.
0x10	0x05:H	Display_Mode	1	Display mode: .7 1= invalid 0 displayed; 0= invalid 0 not displayed. .6-.4 1=The selected line displays the Font0; 0x0-0x7. .3 1=The positive "+" is displayed; 0=The positive "+"is not displayed. .2 1= Character background is not filtered out; 0=Character background is filtered out. .1-.0 Alignment mode: 00=center, 01=left alignment, 02=right alignment.
0x11	0x05:L	Speed_Set	1	.7-.6 Data change speed, 0x00-0x03, 0x00 is the slowest. .5-.0 Scroll speed (pixels scrolled in each DGUS cycle), 0x01-0x3F. The larger the value, the faster the scrolling. The recommended value is 1/ 16 of the 0 line spacing.
0x12	0x06	Font_ID	2	Select the configuration icon font number, 0x0000- 0xFFFF.
0x14	0x07	(X, Y)	4	Show the display coordinates of the selected row. Center mode: the center coordinates of the selected line; left alignment mode: the left midpoint coordinates of the first character of the selected line; right alignment mode: the right midpoint coordinates of the last character of the selected line.



0x18	0x09:H	Line_Height0	1	Line spacing 0 ( the spacing between the selected line and the top 1 line; the spacing between the selected line and the bottom 1 line is also this value, treated symmetrically; the same below.) Height ( pixels in the Y direction).
0x19	0x09:L	Line_Height1	1	Line space 1 ( the space between the top 1 line and the top 2 lines) height ( pixels in the Y direction).
0x1A	0x0A:H	Line_Height2	1	Line space 1 (the space between the top 2 lines and the top 3 lines) height ( pixels in the Y direction).
0x1B	0x0A:L	Line_Height3	1	Line space 1 (the space between the top 3 lines and the top 4 lines) height ( pixels in the Y direction).
0x1C	0x0B:H	DIM_No_Select	1	The window brightness is not selected, 0x00-0xFF. 0x00 is the darkest, 0xFF is the brightest; combined with the background.
0x1D	0x0B:L	Height_Sel	1	The height of the display area of the selected line must be higher than the character height of Font 0.
0x1E	0x0C:H	Font1:2	1	Higher 4 bit, the font of 1 line above, 0x00-0x07; Lower 4bit, the font of 2 lines above, 0x00-0x07;
0x1F	0x0C:L	Font3:4	1	Higher 4bit , the font of 3 lines above, 0x00-0x07; Lower 4bit, the font of 4 lines above, 0x00-0x07;



## 7.19.2 Software Setting

**Roller character**

X 186 Y 24

W 107 H 56 ☐ Locked

Name Roller character

SP FFFF

VP 5840

Data Type Integer (2 Bytes)

Character Lines 7

Integer Digits 5

Decimal Places 0

Data Interval Step 1

Word Length 0

String Address

Inferior Limit 0

Superior Limit 100

**Display Mode**

☐ Display Invalid 0

☐ Display Positive +

☐ Character Background not Filter

Alignment Center

Scroll Speed 5

Data Change Speed 3

Icon Library Number 140

Selected Window Height 80

Window brightness is not selected 80

Selected Line Font Number 0

**First line above the selected line**

Spacing 58

Line Font Number 1

**Second line above the selected line**

Spacing 48

Line Font Number 2

**Third line above the selected line**

Spacing 40

Line Font Number 3

**Forth line above the selected line**

Spacing 0

Line Font Number 0

Coordinates of the upper left corner of the display area

Display area width and height

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The scroll wheel display of the configuration icon font library occupies 4 addresses. That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x000-0x0FFF.

When you need the data to show the scrolling effect, you can choose integer data.

The number of lines of character display, for example, the intuitive effect of setting 7 lines are shown on the right. For example, the integer digit is set to 3 digits, and the decimal digit is set to 2 digits. The intuitive effect of displaying data 512 5.12.



Data upper and lower limit range.

The effect of displaying invalid 0: 01; the effect of unchecking: 1

Character background does not filter effect: Character background filter effect:


Alignment mode: center, left, right, center alignment is recommended.

Scrolling speed (pixels rolled in each DGUS cycle), 0x01-0xFF. The larger the value, the faster the scrolling. The recommended value is 1/16 of the line spacing 0. The height of the selected window is 80/16=5 (d setting value on the left).



Configuration icon .UIC file naming number. Naming ID=number/8 (ID does no conflict with other words). For example, 140/8=17.5 (the occupied position does not conflict with fonts such as 13, 14), 256/8=32KB, a single IC file block occupies the 32KB interval.

The height of the display area of the selected line must be higher than the character height of Font 0. The selected font is 0#, the height on the software is 46, and the 80 display will be looser, and it can be set according to actual needs.



Shows the brightness of the selected window, 0x00-0xFF, 0x00 is the darkest, 0xFF is the brightest; combined with the background. The scope of the unselected window area and the intuitive effect are shown in the right figure. The function is to change the font brightness of the selected area and highlight the selected font.



Here, the font numbers 0, 1, 2, and 3 correspond to the numbers defined in the font settings of the configuration icon font library software welcome interface.

The sidtance between the previous line and the previous line is set according to the height of the font. For example, the line font number is 1, the software is 30 occupies the array height the setting 58 is to make the interval look a little looser, setting 34/38/42 can be display.

**Font settings**

0#Font ☒ Font height 46

1#Font ☒ Font height 30

2#Font ☒ Font height 18

3#Font ☒ Font height 12

4#Font ☐ Font height

5#Font ☐ Font height

6#Font ☐ Font height

7#Font ☐ Font height

**Background setting**

Character background filtering strength 63



Step 1: Create a new 477\*124 pixel canvas, arrange the numbers in order, and set the canvas size according to actual needs.



Step 2: Open the configuration icon font library software - click the new project - the resolution is modified to be the same as the canvas -----Select the saved file path-----OK- -----Add canvas picture-----click the character icon definition, select the range of the intercepted icon, the height of each row should be the same, the width can be inconsistent, the same row, you can use the array----- After configuration, click Save, name it such as 140, and put it in the DWIN-SET folder to call it.

The screenshot shows the DWIN configuration software interface. On the left, the 'Basic parameters' section includes fields for Version, Release date, name, and Encryption. Below this, the 'font settings' section shows a list of font styles (0x, 1x, 2x, 3x, 4x, 5x, 6x, 7x) with their respective heights (40, 30, 20, 12, etc.). The 'background setting' section shows a selected background image. On the right, the '属性' (Properties) panel shows the 'Property' and 'Value' for the selected font style, including '字符类型' (Character type), '字符大小' (Character size), '坐标' (Coordinates), and '字符集' (Character set). The '字符集' (Character set) section shows a list of characters (0-9, -, !, etc.) and their corresponding ASCII values (0030, 0031, etc.).

The central preview window shows the digit array '0123456789-!' repeated in four rows, with a blue text box overlay stating: 'The key value definition is the same as the pop-up keyboard for data variable entry.'

At the bottom, a blue box contains the text: 'Must be set, range 0-63, can be set to 63'.

### 7.19.3 Example of Instructions

5AA5 04 82 5840 0001

0x5AA5: Frame header;

0x04: Data length;

0x82: Write instruction;

0x5840: VP;

0x0001: Data value 1.

### 7.19.4 Effect



## 7.20 GTF Icon Font

The GTF icon control supports efficient display of icon characters.

### 7.20.1 Instruction Storage Format

Address	SP Offset	Definition	Length (byte)	Description
0x00		0x5A18	2	
0x02		SP	2	Variable description pointer, 0xFFFF means loaded by the configuration file.
0x04		0x000B	2	
0x06	0x00:H	*VP	1	Text pointer, must be an even address. The maximum size of text variable data is 255 bytes. 0xFFFF, 0x0000 data or display to the end of the text box will no longer be displayed.
0x08	0x00:L	GTF_ID	1	Use GTF font encoding, 0x0000-0xFFFF.
0x0A	0x01	Font_ID	8	Use the font code ID in the GTF font library, 0x0000-0x03FB.
0x0C	0x05	(X, Y)	2	Start display position. Left alignment mode: the coordinates of the upper left corner displayed on the first line; Right-aligned mode: the coordinates of the upper right corner displayed in the first line; Centering mode: undefined, any value can be used.
0x10	0x06	(Xs, Ys) (Xe, Ye)	8	The coordinates of the upper left and lower right corners of the text box.
0x18	0x07	HOR_Dis	1	Icons are spaced horizontally.
0x19	0x08	VER_Dis	1	Icons are vertically spaced.
0x1A	0x0A:H	Display_Mode	1	.7 Background transparency options: 0 is transparent, the background is not displayed; 1 Opaque, background displayed. .6 font reload. 0 Reload font library (the first GTF icon text display of the page must be loaded); 1 The previous GTF icon text shows that the font library has been loaded, and the speed is improved without repeated loading. .5 Icon Overlay Selection 0 is not superimposed, and the coordinate position automatically moves backward after an icon is displayed; 1 Icons are displayed superimposed. .4-.2 Reserved, write 0. .1-.0 alignment mode: 0=left-aligned 1=centered 2=right-aligned
0x1B	0x0A:L	Undefined	1	Write 0x00

## 7.20.2 Software Setting

X 84 Y 96 W 216 H 219 <input type="checkbox"/> Locked	The coordinates of the upper left corner of the display area Display area width and height
Name GFT Display SP FFFF VP 1000	The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF The GTF icon occupies the address according to the displayed character length, and the max. display length is 128 characters. System variable interface address range: 0x1000-0x0FFF.
GTF_ID 63 FONT_ID 0	The GTF icon name ID is 0-63, and a single GTF icon occupies a small Flash space with a space of 256KB. Can be set by default
Icon Horizontal Spacing 0 Icon Vertical Spacing 0	The larger the horizontal spacing value, the wider the icon spacing 迪 文 The larger the vertical spacing value, the wider the icon spacing 迪 文
Background Setting Transparent, Background	The display background color is usually filtered out by default. It is recommended that the background color of the icon and the color of the basemap area be the same.
Font Reload Setting Reload Font	The text of the previous GTF icon shows that the font library has been loaded, and the speed is improved without repeated loading. Select the settings according to your needs, and the default settings are available.
Icon Loading Selection Superimpose	Display the overlay effect of characters 1 and 2: 1 2 Show characters 1 and 2 do not stack: 1 2
Alignment Left	The characters are left-aligned, or centered, which can be set by default.
Initial Value	

### 7.20.3 GTF TOOL Software Setup Instruction

(1) Software tool: GTF Tool



(2) Setting

- ① Click the "+" in the lower left corner to add a picture;
- ② Use the "rectangle" control to define key values;
- ③ Box-select the character icon area;
- ④ Double-click the control to define the key value;

Key value range 0x01-0xFF;

0-9 key value: 0x30-0x39;


A-Z key value: 0x41-0x5A;

Other key values can be used arbitrarily as needed.

- ⑤ Click "x" to save and close;
- ⑥ Click " Save" to generate the configuration file;
- ⑦ Click " Generate" to save the GTF icon library file.

(3) Precautions

- It is recommended that the GTF icon should not exceed 1920\*1080, and the icon will not be displayed if it is too large;
- If the original image of GTF does not display the bmp and jpg images output by the bitmap software, you can use the bmp and jpg images of the vector graphics software;
- The FTG icon name ID is 0-63, and a single GTF icon occupies the Flash space with a subspace size of 256 KB.

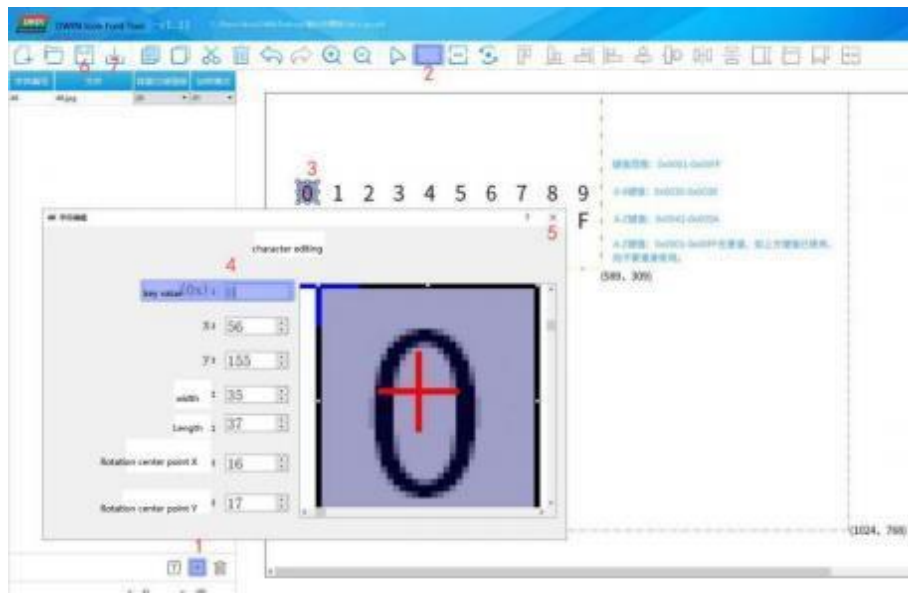



## 7.20.4 Example of Instructions

The max text variable data is 255 bytes, and the variable address is reserved as needed.

① Display character 0

Tx: 5A A5 04 82 1000 30

② Display character 12

Tx: 5A A5 05 82 1000 3132

③ Display character 0123456789

Tx: 5A A5 0D 82 1000 3031 3233 3435 3637 3839

④ Display character A

Tx: 5A A5 04 82 1000 41

⑤ Display characters ABCD, remove redundant characters and add terminator FFFF

Tx: 5A A5 09 82 1000 4142 4344 FFFF

⑥ "China" on the display icon

Tx: 5A A5 07 82 1000 0102 FFFF

⑦ Display icon

Tx: 5A A5 05 82 1000 0304

⑧ "Weather" character on the display icon

Tx: 5A A5 07 82 1000 0506 FFFF

⑨ Clear all characters

Tx: 5A A5 05 82 1000 FFFF

### 7.20.5 Effect





## 7.21 Real-Time Curves

The real-time curves control is to automatically match and display the real-time curve (trend graph) by writing the curve buffer data with the 0x84 instruction.

The display area, the coordinates of the central axis and the display scale (enlargement/reduction) can be set by users.

### 7.21.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A20	2	
0x02		SP	2	SP, 0xFFFF means loaded by configuration file.
0x04		0x000B	2	
0x06	0x00:H	Mode	1	0x00 = The latest data is on the far right, and the curve moves from right to left. Other = The latest data is on the far left, the curve moves from left to right.
0x07	0x00:L	0x00	1	Display mode, bit definition. .7 0=Curve is displayed with data point connection; 1=Curve is displayed with data point. .6 Curve color selection: 0 = Curve has only one color, defined by Color. 1=The curve has 16 colors, Color is a variable pointer, which saves 16 colors (65K colors); at this time, the high 4bit of the curve data is the color index. .5-.0 is undefined, write 0.
0x08	0x01	Xs, Ys Xe, Ye	8	The coordinates of the upper left corner of the curve window ( Xs, Ys) and the coordinates of the lower right corner ( Xe, Ye) Curve out of bounds will not be displayed.
0x10	0x05	Y_ Central	2	The position of the center axis of the curve
0x12	0x06	VD_ Central	2	The curve data value corresponding to the central axis generally takes half of the sum of the maximum and minimum values of the data.
0x14	0x07	Color	2	Curve color
0x16	0x08	MUL_Y	2	The magnification of the vertical axis, the unit is 1/256, 0x0000-0x7FFF.
0x18	0x09:H	CHANEL	1	Data source channel, 0x00-0x07
0x19	0x09:L	Dis_ HOR	1	Horizontal axis interval, 0x01-0xFF.
0x1A	0x0A:H	Pixel_ Scale	1	Curve pixel lattice size (curve line width), 0x00-0x07 corresponds to 1*1 to 8*8.
0x1B	0x0A:L	Reserved	1	Write 0x00

## 7.21.2 Software Setting

Open DGUS, click display control – real- time curves, then set the control display area, and configure the curve color, data source channel, etc. in the setting menu on the right.

If you need to display a thicker curve line, you can place multiple up and down (Y- axis) translation curve variables in the adjacent position and refer to the same data source to achieve this. That is, press Ctrl+ C, Ctrl+ V to copy a set of curve controls.

Click the copied curve box and press up and down keys of the keyboard The more control you copy, the thicker the curve line.

[ Note] The configuration and usage examples with touch controls are as follows .

If the content of vp is stored in sp, combined with incremental adjustment control, adjusting the + 0x09 low byte access address, you can realize automatic scaling of the curve without code .

Also, if combined with drag adjustment control, adjusting + 0x05 to modify the Y\_ Central value, the curve can be moved up and down without code.

The height of the curve frame, when calculating the magnification digits fo the vertical axis, you can directly call this value, which is the (Ye-Ys) value.

The position of the center point of the Y-axis of the curve display frame. Click the display box with the mouse and place it at the middle red dot coordinates to view.

The curve data value corresponding to the central to the central axis is generally taken as half of the sum of the Max. vlaue and the Min. value of the data. Calculation formula:  $VD\_central=(Vmax+Vmin)/2$   
Vmax: The most current value of the data; the Min. value of the Vmin data.

Calculation fomula:  $MUL\_Y=(Ye-Ys)*256/(Vmax-Vmin)$   
Ye: Max. vlaue of curve data. Vmin: The Min. value of the curve data.  
For example:  $78*256/(1000-0)=19.968$  (78 to directly view the height value of the display box) here, round down to 19.  
**272-194=78, 78 can directly view the value of display box height property.**  
Ye: the Y coordinate value of the lower right corner of the curve box, the acronym for end.  
Ys: Y coordinate value in the upper left corner of the curve box, initials of start.  
256: fixed value, Vmax: Max. value of data, Vmin: Min. value of data, e.g. temperature range 20~30.

0x00-0x07 total 8 channels, such as calling 0x00 channel write 0.  
To call chanel 0x33, write 03, call all 8 channels, write 0,1,2,3,4,5,6,7 for each channel.  
Displaying multiple curves in the same area allows you to duplicate and overlay curve boxes.

The pixel pitch of the first Y-axis data and the second Y-axis data.  
The larger of the interval, the wider the span, the smaller the interval, the narrower the span. Range: 0x00-0xFF.

From left to right: The curve data is displayed from the machine to the right.  
From right to left: Start from left to right,, and after the curve box is filled. The data will be displayed from right to left.  
5A A5 0D 82 0310 5AA5 0100 0102 0000 03E8 (Use this instruction to fill the curve frame)  
5A A5 0D 82 0310 5AA50 100 0102 0000 01F4 (Write this one again, it will be from right to left)

The line width of the curve is bold, 0 is the width of one pixel point, 1 is a point thickened on the upper and lower sides of the curve, and 7 is the thickest.

The routine curve display data range: 0-10000 and 1000 indicate that the curve displays the Y axis value, not a coordinate point. For example, 1000 is just a data value.

### 7.21.3 Example of Instructions

VP	Explanation
<b>0x300-0x30F</b>	<p>Status feedback of 8 channel curve buffers (Read-only for users). Each channel occupies 2 words.</p> <p>The storage pointer address of the high byte storage curve data (0x0000 - 0x07FF), The storage pointer address of the low byte storage curve data (0x0000-0x0800). Write 0x0000 to the effective Data length of the curve buffer will cause the curve not to be displayed.</p> <p>Example: 5 A A5 05 82 0301 0000 The curve 0 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 0303 0000 Curve 1 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 0305 0000 Curve 2 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 0307 0000 Curve 3 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 0309 0000 Curve 4 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 030B 000 Curve 5 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 0 5 82 030D 0000 Curve 6 channel will be cleared, and it will be restored if the value is rewritten; 5 A A5 05 82 030F 0000 Curve 7 channel will be cleared, and it will be restored if the value is rewritten;</p>
<b>0x310-0x311</b>	<p>Write start to curve buffer. D3:D2: 0x5AA5 Start a curve buffer data write operation, and the CPU will clear it after the operation. D1: The number of data blocks, 0x01-0x08. D0: undefined, write 0x00.</p>
<b>0x312-0x37F</b>	<p>The data block that needs to be written into the curve buffer, the data is a 16 bit unsigned number. A single block of data is defined as a data channel ID (0x00-0x07) + data word length (0x01- 0x6E) + data.</p>

① 0x00 channel display data 0 and 1000

5A A5 0D 82 0310 5AA5 0100 0002 0000 03E8

0x5AA5: Frame header;

0x0D: Data length;

0x82: Write instruction;

0x0310 : The curve buffer data writing is started; it is the system variable hardware interface curve fixed address;

0x5AA5: Start a curve buffer data writing operation, and clear it after the CPU operation;

0x0100: The number of high byte 0x01 curve data blocks, that is, the number of channels occupied; write 0x00 in case of low byte undefined;

0x0002: High byte 0x00 represents channel 0, low byte 0x02 represents the number of data word lengths. In this example, it is a two-word data, namely 0x0000, 0x03E8;

0x0000: The data to be displayed 0;

0x03E8: The data to be displayed 1000.



## ② 0x06 channel display data 0 and 1000

5A A5 0D 82 0310 5AA5 0100 0602 03E8 0000

## ③ 0x07 channel display data 0 and 1000:

5A A5 0D 82 0310 5AA5 0100 0702 0000 03E8

## ④ 0x00 and 0x07 channel display data 0 and 1000

5A A5 13 82 0310 5AA5 0200 0002 0000 03E8 0702 0000 03E8

0x5AA5: Frame header;

0x0D: Data length;

0x82: Write instruction;

0x0310 : The curve buffer data writing is started; it is the system variable hardware interface curve fixed address;

0x5AA5: Start a curve buffer data writing operation, and clear it after the CPU operation;

0x0200: The number of high byte 0x02 curve data blocks, that is, the number of channels occupied; If an instruction writes 8 channels, this byte needs to be changed to 08; write 0x00 in case of low byte undefined;

0x0002: High byte 0x00 represents channel 0, low byte 0x02 represents the number of data word lengths. In this example, it is a two-word data, namely 0x0000, 0x03E8;

0x0000: The data to be displayed 0;

0x03E8: The data to be displayed 1000;

0x0702: High byte 0x07 represents channel 7, low byte 0x02 represents the number of data word lengths. In this example, it is a two-word data, namely 0x0000, 0x03E8;

0x0000: The data to be displayed 0;

0x03E8: The data to be displayed 1000

The channel and data word lengths of the two curves are written separately.

## ⑤ Channels 0x06 and 0x07 display two cross curves and display from right to left

Instruction 1: 5A A5 13 82 0310 5AA5 0200 0602 0000 03E8 0702 03E8 0000

Instruction 1 is to form a cross curve, where the maximum and minimum values of the two curves are set opposite, so that the middle of the curves can be crossed.

The cross curve is actually two different channel curves, so you need to make two curve controls and set different channels.

Instruction 2: 5A A5 13 82 0310 5AA5 0200 0602 0064 01F4 0702 01F4 0064

On the right-to-left setting screen of the software, it is displayed from left to right at first. When the curve box is filled, write instruction 2, and then you can see that the curve is displayed from right to left.

## ⑥ 0x00-0x078 channels are all displayed

5A A5 37 82 0310 5AA5 0800 0002 0000 03E8 0102 0000 03E8 0202 0000 03E8 0302 0000 03E8 0402 0000 03E8 0502 0000 03E8 0602 0000 03E8 0702 0000 03E8

0x00- 0x07 Channels: Each channel can be refreshed separately in turn to achieve the effect of refreshing different channel curves at the same time.

T5L DGUS curve 8-channel display, a total of 8 channels, each channel can store 2048 words .

After enabling dynamic curve display, starting from 0x1000 , a data buffer is established for each curve according to 2Kwords per channel.

CH0 buffer is 0x1000-0x17FF, CH1 buffer is 0x1800-0x1FFF,

CH2 buffer is 0x2000-0x27FF, CH3 buffer is 0x2800-0x2FFF,

CH4 buffer is 0x3000-0x37FF, CH5 buffer is 0x3800-0x3FFF,

CH6 buffer is 0x4000-0x47FF, CH7 buffer is 0x4800-0x4FFF,

Unused curve buffers can be used as user vp. User can also directly rewrite the curve buffer,

For example, directly rewrite the variable address 5A A5 05 82 1000 0065...

The value of the corresponding channel of the curve will change accordingly.

If the user needs to use 8 channels, the variable addresses and description pointers of other display controls are used from the range of 0x5000~0xFFFF.


### ⑦ Real- time curves SP usage and example

The SP storage address format of this function and some examples of commonly used access instructions are as below.

### ⑧ Negative number display

SP	Instruction(SP of the example is set to 0x8000)	Instruction Effect and Application
<b>0x05</b>	5A A5 05 82 8005 0064	Change the position of the center axis of the curve (the curve moves up and down): move it up and down to the y axis100 position.
<b>0x06</b>	5A A5 05 82 8006 0064	Change the range of the curve ( vertical scaling of the curve): the curve data value corresponding to the central axis, generally half of the sum of the maximum and minimum data. For example, here the instruction is changed to 0x200 range, ( corresponding magnification needs to be modified in the 0x08 pointer address)
<b>0x07</b>	5A A5 05 8 08007 F800	The color of the curve display changes to red
<b>0x08</b>	5A A5 05 82 8008 00F0	Modify the magnification of the vertical axis, the unit is 1/256, 0x0000-0x7FFF. (Need to be used with 0x06 pointer)
<b>0x09:H</b>		Data source channel, 0x00-0x07
<b>0x09:L</b>	5A A5005 82 8007 0014	Change the horizontal axis interval (curve horizontal scaling): display the horizontal axis interval of the 00 channel curve to 0x14 (range 0x01-0xFF)



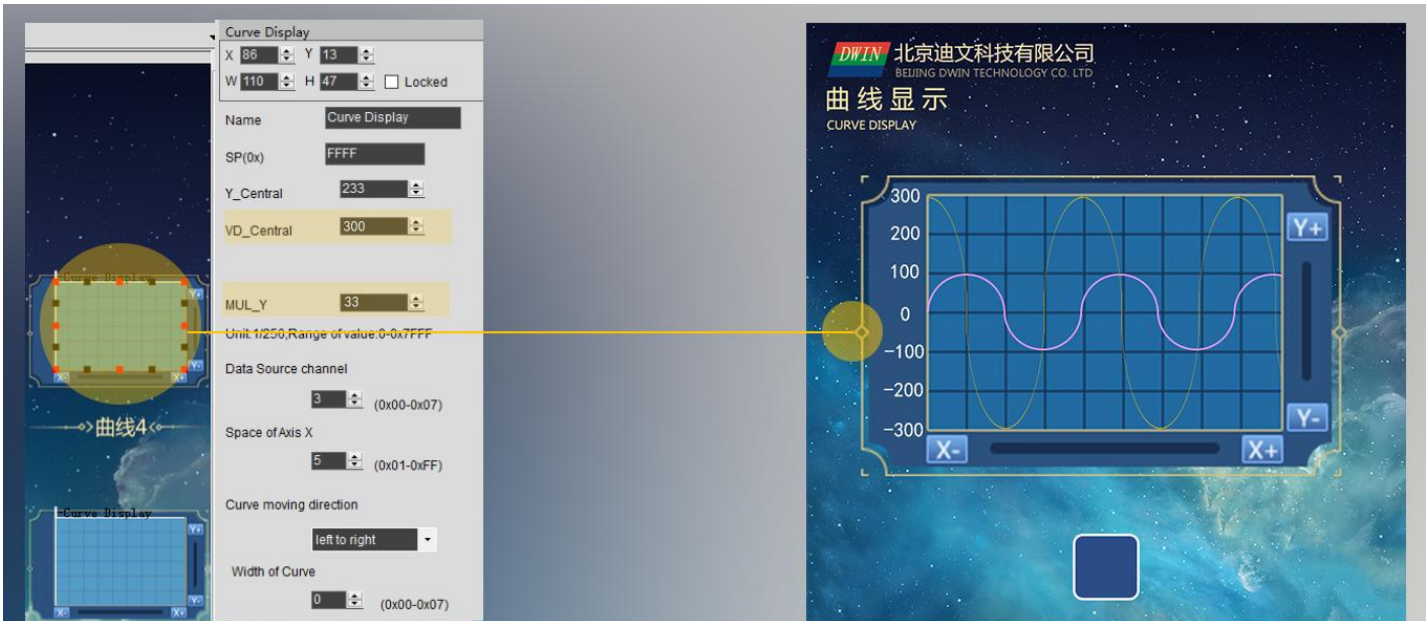

#### Curve display-300-300 settings:

When displaying, it is necessary to add 300 to the data as a whole, so that the VD and vertical axis magnification can be calculated, so the calculated data is 0-600.

If you want to display 300 new, instead of writing data 0x012C directly, you want to write data 600 (300+(absolute value of -300)), that is, 0x0258, then it will be displayed correctly.

VD calculation formula:  $VD\_central = (Vmax - Vmin) / 2$  Example:  $(600 + 0) / 2 = 300$

Vertical axis magnification formula:  $MUL\_Y = (Ye - Ys) * 256 / (Vmax - Vmin)$  Example:  $78 * 256 / (600 - 0) = 33.28$

Round down and take 33.78, which is the H value above the software attribute (the height value of the attribute box)

Command example: 5A A5 0D 82 0310 5AA5 100 030 0000 0256

#### Real-time curve data point refresh, displayed in point form

Set the SP address 0x8000, + 0x0000 attribute address low byte. 7 bits write 1 to open the display data point, write 0 to connect the data point,

Convert binary 1000 0000 into hexadecimal 0x80, the command example is as follows:


Turn on the data in dot form: 5A A5 05 82 8000 00 80

Curve connection display : 5A A5 05 82 8000 00 00

Display data 1000: 5A A5 0B 82 0310 5AA5 0100 0001 03E8

Display data 500: 5A A5 0B 82 0310 5AA5 0100 0001 01F4



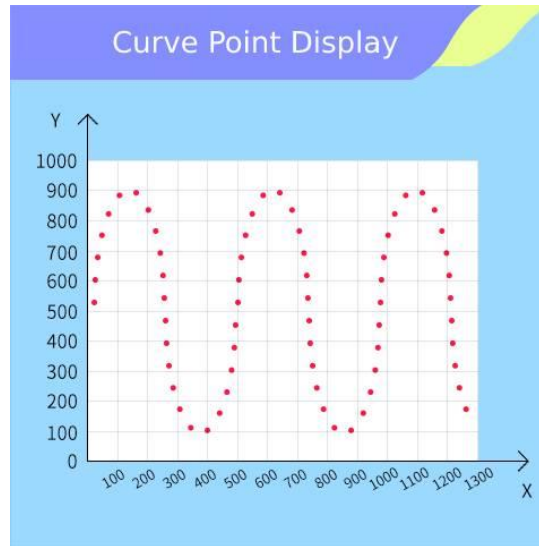

Example of 16 colors display command for the same curve

**3 colors:** After the DGUS software enables multiple color display functions and specifies the color address, write the color value (red: 0xF800, yellow: FFE0, blue: 0x001F) to the color variable address.

① Define the color position first:

5A A5 09 82 9000 F800 FFE0 001F

Meaning: 0x9000 is the starting address of the specified color value, up to 16 color values, 16 color values can be written together, here is an example to write 3 color values, red: 0xF800, yellow: FFE0, blue: 0x001F.

② Re-index call color:

5A A5 06 84 01 0010 03E8;

meaning:

0x5A A5: frame header;

0x06: data length;

0x84: write curve buffer data;

0x01: curve channel 0;

0x0010: **curve data of the high 4bit is the colour index ID**, 1 word = 2 bytes, 1byte = 8bit, such as: 1111 0000, the high 4bit is 1111, the low 4bit is 0000; high 4bits are written 1 is the binary 1111, converted into hexadecimal is **F**, that is, there are a total of 16 kinds of combinations ID (0-15), corresponding to 16 kinds of colour can be set; when using a certain ID, the program will call its corresponding colour, this colour value is the value written to the 0x9000 address above; low 12bit represents the curve data, 0x9000 address, this colour value is the value written to the upper. There are 16 kinds of ID (0-15), which can be set to 16 kinds of colors; when using a certain ID, the program will call its corresponding colour, and this colour value is the value written to the 0x9000 address from above; **the low 12bit indicates the curve data**, 0x010 is data 16, 0x3E8 is data 1000.

③ Different IDs of other data indexes call different colors


5A A5 06 84 01 1010 13E8;

**The high 4bit of the curve data is the color index ID; the low 12bit represents the curve data**, 0x010 is data 16, 0x3E8 is data 1000

5A A5 06 84 01 2010 23E8;

The high 4bit of the curve data is the color index ID; the low 12bit represents the curve data, 0x010 is data 16, 0x3E8 is data 1000

The actual display of the effect of the above 4 commands is as follows:

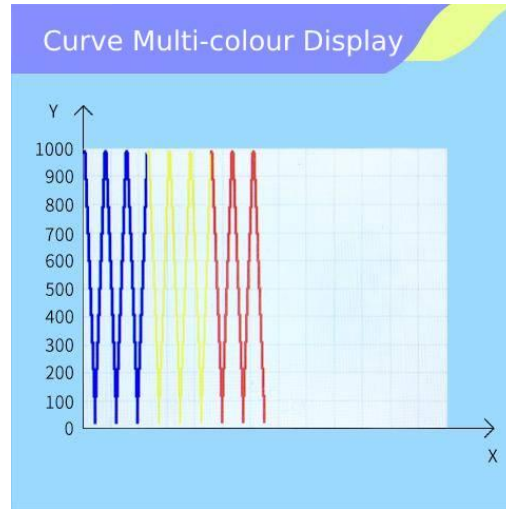

**16 colors:** After the DGUS software enables multiple color display functions and specifies the color address, write the color value to the color variable address

ID0: Red: 0xF800

ID1: Blue: 0x001F

ID2: Green: 0x07E0

ID3: Orange: 0xFC00

ID4: Purple: 0x801F

ID5: Turquoise: 0x07FF

ID 6: Brown: 0x4000

ID7: Pink: 0xFC1F

ID8: Dark green: 0x0208

ID9: Yellow-green: 0x8400

ID10: Rose red: 0xF810

ID11: Deep Purple: 0x4010

ID12: Sky blue: 0x041F

ID13: Neutral gray: 0x8410

ID14: Black: 0x0000

ID15: Dark blue: 0x0010

Define color position: 5A A5 23 82 9000 F800 001F 07E0 FC00 801F 07FF 4000 FC1F 0208 8400 F810 4010 041F 8410 0000 0010

Index ID0 data display red: 5A A5 06 84 01 0010 03E8

Index ID1 data display blue: 5A A5 06 84 01 1010 13E8

Index ID2 data display green: 5A A5 06 84 01 2010 23E8

Index ID3 data is displayed in **orange**: 5A A5 06 84 01 3010 33E8

Index ID4 data display **purple**: 5A A5 06 84 01 4010 43E8

Index ID5 data showing **turquoise**: 5A A5 06 84 01 5010 53E8

Index ID6 data display **brown**: 5A A5 06 84 01 6010 63E8

Index ID7 data shows **pink**: 5A A5 06 84 01 7010 73E8

Index ID8 data shows **dark green**: 5A A5 06 84 01 8010 83E8

Index ID9 data display **yellow-green**: 5A A5 06 84 01 9010 93E8

Index ID10 data showing **rose red**: 5A A5 06 84 01 A010 A3E8


Index ID11 data shows **dark purple**: 5A A5 06 84 01 B010 B3E8

Index ID12 data display **sky blue**: 5A A5 06 84 01 C010 C3E8


Index ID13 data display **neutral gray**: 5A A5 06 84 01 D010 D3E8

Index ID14 data display **black**: 5A A5 06 84 01 E010 E3E8

Index ID15 data display **dark blue**: 5A A5 06 84 01 F010 F3E8

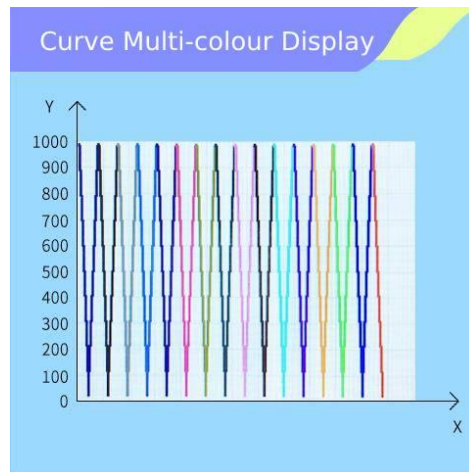

## 7.21.4 Effect

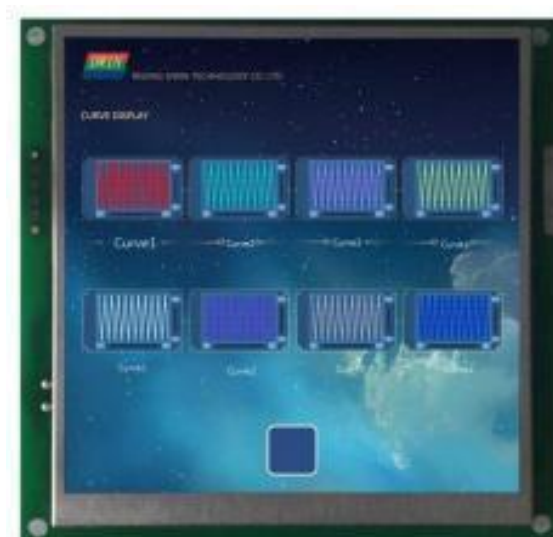

## 7.22 Basic Graphics

The basic graphics control is to define a "drawing board" function in the display configuration file 1 4 . BIN, and the specific drawing operation is determined by the content of the variable memory pointed to by \*VP.

Users can realize different drawing functions by changing the data in the variable memory.

### 7.22.1 Instruction Storage Format

Address	SP Offset	Definition	Length (byte)	Description
0x00		0x5A21		
0x02		*SP		
0x04		0x0008		
0x06	0x00	*VP	2	Variable data pointer
0x08	0x01	Area	8	The coordinates of the upper left corner and the lower right corner of the drawing display area; if the drawing exceeds the boundary, it will not be displayed. only for 0x0001-0x0005, 0x0009, 0x000A, 0x000B instructions are valid.
0x10	0x05:H	Dashed_Line_En	1	0x5A: Drawing instructions using line segments ( 0x02, 0x03,0x09, 0x0A instructions) will use dotted lines or dotted lines to display line segments; Miscellaneous: Drawing instructions that use line segments display line segments with solid lines.
0x11	0x05:L	Dash_Set	4	The 4 bytes are sequentially formatted with dotted lines (dot-dash): The number of solid lines in the first segment, the number of dotted lines in the first segment, the number of solid lines in the second segment, and the number of dotted lines in the second segment. For example, setting 0x10 0x04 0x10 0x04 will display dashed lines; setting 0x10 0x04 0x02 0x04 will display dotted lines.
0x15	0x07:L	Pixel_Scale		
0x16	0x07	Undefined	13	Reserved 0x00

The description of the variable data format pointed to by the variable data pointer (variable storage space) is shown in the table.

Address	Definition	Description
VP	CMD	Drawing instruction
VP+1	Data_Pack_Num_Max	Max data packet: connection (0x0002) , defined as the number of connection lines (the number of vertices-1);
VP+2	DATA_Pack	Data

CMD	Function	Address	Length	Definition	Description
0x0001	Dot	0x00	2	(x, y)	The coordinate position of dot. The high byte of coordinate x is the judgment condition.
		0x02	1	Color	Dot color
0x0002	Line	0x00	1	Color	Line color
		0x01	2	(x, y) <sub>0</sub>	The coordinate of the line vertex <sub>0</sub> , and the high byte of the x coordinate are the judgment conditions.
		0x03	2	(x, y) <sub>1</sub>	The coordinate of the line vertex <sub>1</sub> , and the high byte of the x coordinate are the judgment conditions.
		0x01+2*n	2	(x, y) <sub>n</sub>	The coordinate of the line vertex n, and the high byte of the x coordinate are the judgment conditions.
0x0003	Rectangular	0x00	2	(x, y) <sub>s</sub>	The coordinates of the upper left corner of the rectangle and the high byte of the x coordinate are the judgment conditions.
		0x02	2	(x, y) <sub>e</sub>	The coordinates of the bottom right corner of the rectangle.
		0x04	1	Color	Rectangular color
0x0004	Rectangle filling	0x00	2	(x, y) <sub>s</sub>	The coordinates of the upper left corner of the rectangle and the high byte of the x coordinate are the judgment conditions.
		0x02	2	(x, y) <sub>e</sub>	The coordinates of the bottom right corner of the rectangle.
		0x04	1	Color	Fill color of the rectangle field.
0x0005	Circle	0x00	2	(x, y) <sub>s</sub>	Center coordinates.
		0x02	1	R	The radius of the circle.
		0x03	1	Color	The arc color.
0x0006	Picture Copy& Paste	0x00	1	Pic_ID	The ID of the page where the cut image area is located; the high byte is the judgment condition
		0x01	2	(x, y) <sub>s</sub>	The coordinates of the upper left corner of the image cutting area.
		0x03	2	(x, y) <sub>e</sub>	The coordinates of the lower right corner of the image cutting area.
		0x05	2	(x, y)	The coordinates of the upper left corner of the area in the current page that it is cut and pasted to.
0x**07	Icon Display	0x00	2	(x, y)	The coordinate position of display area, and the high byte of the x coordinate is the judgment condition.
		0x02	1	ICON_ID	Icon ID, the location of the icon library is specified by the high byte of instruction. The icon is fixed to not display the background color.
0x0008	Closed Region Filling	0x00	2	(x, y)	The coordinates of point.
		0x02	1	Color	The color of filling the rectangle field.
0x0009	Frequency Spectrum (Vertical line)	0x00	1	Color <sub>0</sub>	Connect (x <sub>0</sub> , Y <sub>0s</sub> ) (x <sub>0</sub> , Y <sub>0e</sub> ) with Color <sub>0</sub> color, and the high byte of x <sub>0</sub> is the judgment condition.
		0x01	3	X <sub>0</sub> ,Y <sub>0s</sub> ,Y <sub>0e</sub>	

<b>0x000A</b>	Line segment display	0x00	1	color	Connect (Xs, Ys) (Xe, Ye) with Color, and the high byte of Xs is the judgment condition.
		0x00	1	color	
		0x00	1	color	
<b>0x000D</b>	XOR	0x00	2	(x, y)s	The coordinates of the upper left corner of the rectangular area, and the high byte of the x coordinate are the judgment
		0x02	2	(x, y)e	The coordinates of the lower right corner of the rectangular field.
		0x04	1	Color	The color of xOR of the rectangular field, and 0xFFFF will be inverted.
<b>0x000E</b>	Two- color bitmap display	0x00	2	(x, y)s	The bitmap displays the coordinates of the upper left corner of the rectangle, and the high byte of the x- coordinate is the judgment
		0x02	1	X_Dots	The number of dots in the x direction of the bitmap
		0x03	1	Y_Dots	The number of dots in the y direction of the bitmap
		0x04	1	Color1	" 1 " bit corresponding display color
		0x05	1	Color0	The display color corresponding to "0 " bit; if you set Color0 and Color1 to be the same, Indicates that "0 " bit does not need to be displayed, just skip it.
		0x06	N	Date_Pack	Display data, MSB mode; in order to facilitate users to read and write data, each line of data must be aligned to a word, that is, the next line of data always starts from a new data word (Word).
<b>0x0011</b>	Ellipse display	0x00	2	(x, y)	The coordinates of the center of the ellipse, and the high byte of the x coordinate is the judgment condition.
		0x02	1	A	Long axis length.
		0x03	1	B	Short axis length.
		0x04	1	Color	Elliptical arc color.
<b>0x0012</b>	Four- color bitmap	0x00	2	(x, y) s	The upper left coordinates of the displayed bitmap, and the high byte of the x- coordinate is the judgment condition. <b>The starting VP address must be even ( double- word aligned) .</b>
		0x02	1	X_Dots	The number of bitmap X-direction pixels, which must be divisible by 16 .
		0x03	1	Y_Dots	The number of bitmap Y- direction pixels.
		0x04	1	Color0	The display color corresponding to the "00" bit.
		0x05	1	Color1	The display color corresponding to the "01" bit.
		0x06	1	Color2	The display color corresponding to the "10" bit.
		0x07	1	Color3	The display color corresponding to the "11" bit.
		0x08	N	Data_Pack	Display data in MSB. Each line of data must be aligned to a double word ( 16 pixels) for users to read and write the data.

The value 0xFF indicates that the drawing operation is over, and 0xFE indicates that the operation is skipped (ignored).



## 7.22.2 Software Setting

Open DGUS, click display control – basic graphics, then set the control display area, and configure parameters in the right menu, and finally use instructions to realize drawing.

Basic graphics display

X 292 Y 167  
W 158 H 110 ☐ Locked

Name Basic Graphic

SP (0x) FFFF

VP (0x) 5440

☐ Dotted line

Use segment drawing instruction:  
0x02,0x03,0x09,0x0A  
segment will show as dotted line

Set dotted line format

1	(1-255)
1	(1-255)
1	(1-255)
1	(1-255)

The coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF  
The basic graphics occupies the corresponding address according to the drawing command.  
That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF  
5A A5 17 82 5440 0006 0001 0000 0021 0027 00A3 0040 0168 0168 FF00  
This instruction is developed from 0x5440 address and occupies a total of 10 variable address spaces 0x5440-0x5449.  
The next instruction needs to start from 544A. The 0x0006 cut instruction maps the 0x5440 address.  
0x0001 cut number maps 0x5441 address, 0x0000 cut page ID maps 0x5442 address.  
The mapped address in the instruction will be used as the occupied address.

After checking, 0x02, 0x03, 0x09, 0x0A use line drawing commands.  
The line segments will be displayed using dashed or dotted lines. The dotted line (dotted line) format is set in the 4 bytes in turn;  
The number of solid lines in the first segment, the number of dotted lines in the first segment, the number of solid lines in the second segment, and the number of dotted lines in the second segment.  
For example, setting 0x10 0x04 0x10 0x04 will display a dotted line.  
Setting 0x10 0x04 0x02 0x04 will display a dotted line.

### 7.22.3 Example of Instructions

The following instructions are required to cover the whole area of the page with the basic graphics box.

The following instructions should be tested on the resolution of 720 \* 720 . If the resolution is small, it is necessary to pay attention to whether the coordinate point (360,360) is within the display range, so as to avoid not being displayed beyond the range.

#### 7.22.4 Set point

Show a red dot

5A A5 0F 82 5440 0001 0001 0168 0168 F800 FF00

0x5AA5: Frame header; 0x0D Data length;

0x82: Write instruction;

0x5440: VP;

0x0001: Draw point;

0x0001: The number of points;

0x0168:0168 (360,360) coordinates;

0xF800: Color value;

0xFF00: End of drawing operation.

Show two red dots

5A A5 15 82 5440 0001 0002 0168 0168 F800 0169 0169 F800 FF00

0x5AA5: Frame header;

0x15: Data length;

0x82: Write instruction;

0x5440: VP;

0x0001: Draw point;

0x0001: The number of points;

0x0168 0168: (360,360)coordinates,

0xF800 Color value;

0x0169 0169: (361,361)coordinates,

0xF800: Color value;

0xFF00: End of drawing operation.

Show three red dots

5A A5 19 82 5440 0001 0003 0168 0168 F800 0169 0169 F800 016A 016A F800 FF00

0x5AA5: Frame header; 0x19 Data length;

0x82: Write instruction;

0x5440: VP;

0x0001: Draw point;

0x0003: The number of points;

0x0168 0168: (360,360)coordinates; 0xF800 color value;

0x0169 0169: (361,361)coordinates, 0xF800 color value;

0x016A 016A: (362,362)coordinates, 0xF800 color value;

0xFF00: End of drawing operation.

### 7.22.5 End Point Connection

Two points are connected to form a line

5A A5 13 82 5440 0002 0001 F800 00FC 0168 015E 0168 FF00

0x5AA5: Frame header;

0x13 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0001: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0xFF00: End of drawing operation.

Three points are connected to form lines

5A A5 17 82 5440 0002 0002 F800 00FC 0168 015E 0168 015E 0136 FF00

0x5AA5: Frame header;

0x17 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0002: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0xFF00 End of drawing operation.

Four points are connected to form lines

5A A5 1B 82 5440 0002 0003 F800 00FC 0168 015E 0168 015E 0136 0190 0136 FF00

0x5AA5: Frame header;

0x1B Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0003: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (350,310)coordinates;

0xFF00: End of drawing operation.

Five points are connected to form lines

5A A5 1F 82 5440 0002 0004 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 FF00

0x5AA5: Frame header;

0x1F Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0004: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (350,310)coordinates;

0x0190 0168: (400,360)coordinates;

0xFF00: End of drawing operation.

Six points are connected to form lines

5A A5 23 82 5440 0002 0005 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 FF00

0x5AA5: Frame header;

0x23 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0005: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (400,310)coordinates;

0x0190 0168: (400,360)coordinates;

0x01C2 0168: (450 360)coordinates;

0xFF00: End of drawing operation.

Seven points connected to form lines

5A A5 27 82 5440 0002 0006 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 01C2 0136 FF00

0x5AA5: Frame header;

0x27 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0006: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;



0x015E 0136: (350,310)coordinates;  
 0x0190 0136: (400,310)coordinates;  
 0x0190 0168: (400,360)coordinates;  
 0x01C2 0168: (450 360)coordinates;  
 0x01C2 0136: (450,310)coordinates;  
 0xFF00: End of drawing operation.

Eight points are connected to form lines

5A A5 2B 82 5440 0002 0007 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 01C2  
 0136 01F4 0136 FF00

0x5AA5: Frame header;  
 0x2B Data length;  
 0x82: Write instruction;  
 0x5440: VP;

0x0002: Draw a line segment;

0x0007: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (400,310)coordinates;

0x0190 0168: (400,360)coordinates;

0x01C2 0168: (450 360)coordinates;

0x01C2 0136: (450,310)coordinates;

0x01F4 0136: (500,310)coordinates;

0xFF00: End of drawing operation.

Nine points connected to form lines

5A A5 2F 82 5440 0002 0008 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 01C2  
 0136 01F4 0136 01F4 0168 FF00

0x5AA5: Frameheader;

0x2F Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0008: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (400,310)coordinates;

0x0190 0168: (400,360)coordinates;

0x01C2 0168: (450 360)coordinates;

0x01C2 0136: (450,310)coordinates;



0x01F4 0136: (500,310)coordinates;

0x01F4 0168: (500,360)coordinates;

0xFF00: End of drawing operation.

Ten points connected to form lines

5A A5 33 82 5440 0002 0009 F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 01C2 0136  
01F4 0168 0226 0168 FF00

0x5AA5: Frame header;

0x33 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x0009: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (400,310)coordinates;

0x0190 0168: (400,360)coordinates;

0x01C2 0168: (450 360)coordinates;

0x01C2 0136: (450,310)coordinates;

0x01F4 0136: (500,310)coordinates;

0x01F4 0168: (500,360)coordinates;

0x0226 0168: (550,360)coordinates;

0xFF00: End of drawing operation.

Eleven points are connected to form lines

5A A5 37 82 5440 0002 000A F800 00FC 0168 015E 0168 015E 0136 0190 0136 0190 0168 01C2 0168 01C2 0136  
01F4 0168 01F4 0168 0226 0168 0226 0136 FF00

0x5AA5: Frame header;

0x37 Data length;

0x82: Write instruction;

0x5440: VP;

0x0002: Draw line segment;

0x000A: The number of connections;

0xF800: Color value;

0x00FC 0168: (252,360)coordinates;

0x015E 0168: (350,360)coordinates;

0x015E 0136: (350,310)coordinates;

0x0190 0136: (400,310)coordinates;

0x0190 0168: (400,360)coordinates;

0x01C2 0168: (450 360)coordinates;

0x01C2 0136: (450,310)coordinates;

0x01F4 0136: (500,310)coordinates;



0x01F4 0168: (500,360)coordinates;

0x0226 0168: (550,360)coordinates;

0x0226 0136: (550,310)coordinates;

0xFF00: End of drawing operation.

### 7.22.6 Rectangle

Show a rectangle

5A A5 13 82 5440 0003 0001 011E 012C 01AA 018C F800 FF00

0x5AA5: Frame header;

0x13: Data length;

0x82: Write instruction;

0x5440: VP;

0x0003: Draw rectangle;

0x0001: Draw one rectangle;

0x011E 012C: (286, 300) upper left coordinate;

0x01AA 018C: (426, 396) lower right coordinate;

0xF800: Color;

0xFF00: The drawing operation has ended.

Show two rectangles

5A A5 1D 82 5440 0003 0002 011E 012C 01AA 018C F800 01AB 018D 01E6 01E6 F800 FF00

0x5AA5: Frame header;

0x1D: Data length;

0x82: Write instruction;

0x5440: VP;

0x0003: Draw rectangle;

0x0002: Draw two rectangles;

0x011E 012C: (286, 300) upper left coordinate;

0x01AA 018C: (426, 396) lower right coordinates;

0xF800: Color;

0x01AB 018D: (427, 397) upper left coordinate;

0x01E6 01E6: (486,486) lower right coordinate;

0xF800: Color;

0xFF00: The drawing operation has ended.

Show three rectangles

5A A5 27 82 5440 0003 0003 011E 012C 01AA 018C F800 01AB 018D 01E6 01E6 F800 01E6 01E6 0162 022C F800 FF00

0x5AA5: Frame header;

0x27: Data length;

0x82: Write instruction;

0x5440: VP;

0x0003: Draw rectangle;

0x0003: Draw three rectangles;

0x011E 012C: (286, 300) upper left coordinate;  
0x01AA 018C: (426,96) lower right coordinate;  
0xF800: Color;  
0x01AB 018D: (426,96) upper left coordinate;  
0x01E6 01E6: (486,486) upper right coordinate;  
0xF800: Color;  
0x01E6 01E6: (486,486) upper left coordinate;  
0x0162 022C: (354,556) lower right coordinate;  
0xF800: Color;  
FF00: The drawing operation ends.

### 7.22.7 Rectangle Fill

Fill a rectangle

5A A5 13 82 5440 0004 0001 011E 012C 01AA 018C F800 FF00

0x5AA5: Frame header;

0x13 Data length;

0x82: Write instruction;

0x5440: VP;

0x0004: Fill rectangle;

0x0001: Fill one rectangle;

0x011E 012C: (286, 300) upper left coordinate;

0x01AA 018C: (426, 396) lower right coordinate;

0xF800: Color;

0xFF00: The drawing operation has ended.

Fill two rectangles

5A A5 1D 82 5440 0004 0002 011E 012C 01AA 018C F800 01AB 018D 01E6 01E6 F800 FF00

0x5AA5: Frame header;

0x1D Data length;

0x82: Write instruction;

0x5440: VP;

0x0004: Fill rectangle;

0x0002: Fill two rectangles;

0x011E 012C (286,00) upper left coordinate; 0x01AA 018C (426, 96) lower right coordinate;0xF800: Color;

0x01AB 018D (427,97) upper left coordinate; 0x01E6 01E6 (486,486) lower right coordinate; 0xF800: Color;

0xFF00: The drawing operation ends.

Fill three rectangles

5A A5 27 82 5440 0004 0003 011E 012C 01AA 018C F800 01AB 018D 01E6 01E6 F800 01E6 01E6 0221 022C F800

FF00

0x5AA5: Frame header;

0x27: Data length;

0x82: Write instruction;

0x5440: VP;

0x0004: Fill rectangle;

0x0003: Fill three rectangles;

0x011E 012C (286,00) upper left coordinate; 0x01AA 018C (426,396) lower right coordinate; 0xF800: Color;

0x01AB 018D (427,97) upper left coordinate; 0x01E6 01E6 (486,486) lower right coordinate, 0xF800: Color;

0x01E6 01E6 (486,486) upper left coordinate; 0x0221 022C (545,556) lower right coordinate; 0xF800: Color;

0xFF00: The drawing operation has ended.

When filling, the coordinates of the lower right corner are larger than the coordinates of the upper left corner.

## 7.22.8 Image Copy and Paste

This instruction is frequently used and can be used for the clipping display of the progress bar.

5A A5 17 82 5440 0006 0001 0000 0021 002700A3 0040 0168 0168 FF00

0x5AA5: Frame header; 0x17:

Data length;

0x82: Write instruction;

0x5440: VP;

0x0006: Image copy and paste; 0x0001:

Cut a region;

0x0021 0027 (33, 39): Top left coordinates of page 0, 0x00A3

0040 (163,64): Bottom right coordinates of page 0;

0x0168 0168 (360,360): Paste to the current page coordinates;

0xFF00 Drawing operation ended.

## 7.22.9 Icon Display

Displays icon No. 01 in the No. 48 icon library.

5A A5 0F 82 5440 3007 0001 0168 0168 0001 FF00

0x5AA5: Frame header;

0x0F: Data length;

0x82: Write instruction;

0x5440: VP;

0x30: Icon library No.48;

0x07: 07 icon Write instruction;

0x0001: display an icon;

0x0168 0x0168: The starting display coordinates of the upper left corner of the icon (360, 360);

0x0001: Icon No. 1 in the No. 48 icon library.

0xFF00: Terminator

Displays icon No. 02 from the icon library No. 48.

5A A5 0F 82 5440 3007 0001 0168 0168 0002 FF00

0x5AA5: Frame header;

0x0F: Data length;

0x82: Write instruction;

0x5440: VP;

0x30: Icon library No.48;

0x07: 07 icon Write instruction;

0x0001: Display an icon;

0x0168 0x0168: The starting display coordinates of the upper left corner of the icon (360,360);

0x0002: Icon No. 2 in the No. 48 icon library.

0xFF00: Terminator

## 7.22.10 Enclosed Area Filling

### Fill a circle

It is necessary to make two basic graphic display boxes and set two different variable addresses, such as one variable address is set to 0x5440, the other is set to 0x5540, and the background image should be solid color, otherwise it cannot be filled normally.

Step 1: The 0x5440 address displays a circle:

5A A5 11 82 5440 0005 0001 0168 0168 0040 F800 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0005: Draw circle;

0x0001: Draws one circle;

0x0168, 0x0168: Circular coordinates (360,360);

0x0040: Radius, in pixels;

0xF800: Red;

0xFF00:

Terminator.

Step 2: Based on the 0x5540 address, fill the circular enclosed area with the center of the circle as the seed point:

5A A5 0F 82 5540 0008 0001 0168 0168 F800 FF00

0x5AA5: Frame header;

0x0F: Data length;

0x82: Write instruction;

0x5440: VP;

0x0008: Closed Area Filling;

0x0001: Fill a closed area;

0x0168, 0x0168: Circular enclosed area coordinates (360,360);

0xF800: Red;

0xFF00: Terminator.

## 7.22.11 Spectrum Display

Show a spectrum

5A A5 11 82 5440 0009 0001 F800 0168 0168 0190 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0009: Spectrum display;  
0x0001: shows a spectrum;  
0xF800: Color;  
0x0168: x0 coordinates,  
0x0168: Y0s start coordinate;  
0x0190: Y0e end coordinate;  
0xFF00: Drawing operation ended.

#### Display two spectrums

5A A5 19 82 5440 0009 0002 F800 0168 0168 0190 F800 0190 0168 01C2 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0009: Spectrum display;

0x0002: Shows two spectrums;

0xF800: Color; 0x0168 (360): x0 coordinates, 0x0168 (360): Y0s start coordinates; 0x0190 (400): Y0e end coordinates;

0xF800: Color; 0x0190 (400) x1 coordinates; 0x0168 (360): Y1s start coordinates; 0x01C2 (450): Y1e end coordinates;

0xFF00: Drawing operation ended.

#### Display three spectrums

5A A5 21 82 5440 0009 0003 F800 0168 0168 0190 F800 0190 0168 01C2 F800 01C2 0168 01F4 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0009: Spectrum display;

0x0003: Shows three spectrums;

0xF800: Color; 0x0168 (360): x0 coordinates, 0x0168 (360): Y0s start coordinates; 0x0190 (400): Y0e end coordinates;

0xF800: Color; 0x0190 (400) x1: coordinates; 0x0168 (360): Y1s start coordinates; 0x01C2 (450): Y1e end coordinates;

0xF800: Color; 0x01C2 (450): x2 coordinates; 0x0168 (360): Y2s start coordinates; 0x01F4 (500): Y2e end coordinates;

0xFF00: Drawing operation ended.

#### Displays four spectrums

5A A5 29 82 5440 0009 0004 F800 0168 0168 0190 F800 0190 0168 01C2 F800 01C2 0168 01F4 F800 01F4 0168 020D FF00

5A A5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0009: Spectrum display;

0x0004: Displays four spectrums;

0xF800: Color; 0x0168 (360): x0 coordinates, 0x0168 (360): Y0s start coordinates; 0x0190 (400): Y0e end coordinates;

0xF800: Color; 0x0190 (400): x1 coordinates; 0x0168 (360): Y1s start coordinates; 0x01C2 (450): Y1e end coordinates;

0xF800: Color;0x01C2 (450): x2 coordinates;0x0168 (360): Y2s start coordinates; 0x01F4 (500): Y2e end coordinates;  
0xF800: Color;0x01F4 (500): x3 coordinates;0x0168 (360): Y3s start coordinates; 0x020D (525): Y3e end coordinates;  
0xFF00: Drawing operation ended.

Display five spectrums

5A A5 31 82 5440 0009 0005 F800 0168 0168 0190 F800 0190 0168 01C2 F800 01C2 0168 01F4 F800 01F4 0168  
020D F800 0226 0168 0226 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x0009: Spectrum display;

0x0005: Displays five spectrums;

0xF800: Color;0x0168 (360) x0 coordinates, 0x0168 (360) Y0s start coordinates; 0x0190 (400) Y0e end coordinates;

0xF800: Color;0x0190 (400) x1 coordinates;0x0168 (360) Y1s start coordinates; 0x01C2 (450) Y1e end coordinates;

0xF800: Color;0x01C2 (450): x2 coordinates;0x0168 (360): Y2s start coordinates; 0x01F4 (500): Y2e end coordinates;

0xF800: Color;0x01F4 (500): x3 coordinates;0x0168 (360): Y3s start coordinates; 0x020D (525): Y3e end coordinates;

0xF800: Color;0x0226 (550): x4 coordinates; 0x0168 (360): Y4s start coordinates; 0x0226 (550): Y4e end coordinates;

0xFF00: End drawing operation

Y0s Y0e settings cannot be the same.

## 7.22.12 Line Segment Display

Show a line segment

5A A5 13 82 5440 000A 0001 F800 0168 0168 0190 0168 FF00

0x5AA5: Frame header;

0x11:Data length;

0x82: Write instruction;

0x5440: VP;

0x000A: Draw line segment;

0x0001: Draws a line segment;

0xF800: Color;

0x0168 0168 (360,360) coordinates;

0x0190 0168 (400,360) coordinates;

0xFF00: End drawing operation

Show two line segments

5A A5 1D 82 5440 000A 0002 F800 0168 0168 0190 0168 F800 0168 0190 01C2 0190 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x000A: Draw line segment;

0x0002: Draws two line segments;



0xF800: Color;0x0168 0168 (360,360) coordinates;0x0190 0168 (400,360) coordinates;  
0xF800: Color;0x0168 0190 (360,400) coordinates;0x01C2 0190 (450,400) coordinates;  
0xFF00: End drawing operation

Show three line segments

5A A5 27 82 5440 000A 0003 F800 0168 0168 0190 0168 F800 0168 0190 01C2 0190 F800 0168 01C2 01F4 01C2 FF00

0x5AA5: Frame header;

0x1:1 Data length;

0x82: Write instruction;

0x5440: VP;

0x000A: Draw line segment;

0x0003:Draw three line segments;

0xF800: Color;0x0168 0168 (360,360) coordinates;0x0190 0168 (400,360) coordinates;

0xF800: Color;0x0168 0190 (360,400) coordinates;0x01C2 0190 (450,400) coordinates;

0xF800: Color;0x0168 01C2 (360,450) coordinates;0x01F4 01C2 (500,450) coordinates;

0xFF00 End drawing operation

Show four line segments

5A A5 31 82 5440 000A 0004 F800 0168 0168 0190 0168 F800 0168 0190 01C2 0190 F800 0168 01C2 01F4 01C2 F800 0168 01F4 0226 01F4 FF00

0x5AA5: Frame header;

0x11: Data length;

0x82: Write instruction;

0x5440: VP;

0x000A: Draw line segment;

0x0004:Draw four line segments;

0xF800: Color;0x0168 0168 (360,360) coordinates;0x0190 0168 (400,360) coordinates;

0xF800: Color;0x0168 0190 (360,400) coordinates;0x01C2 0190 (450,400) coordinates;

0xF800: Color;0x0168 01C2 (360,450) coordinates;0x01F4 01C2 (500,450) coordinates;

0xF800: Color;0x0168 01F4 (360,500) coordinates;0x0226 01F4 (550,500) coordinates;

0xFF00 End drawing operation

### 7.22.13 Rectangular Field XOR Highlighting Inverse Color Display

Rectangular field XOR, highlight and inverse color display once

5A A5 13 82 5440 000D 0001 0168 0168 0190 0190 F800 FF00

0x5AA5: Frame header;

0x13 Data length;

0x82: Write instruction;

0x5440: VP;

0x000D: Rectangle XOR;

0x0001: XOR the rectangular field once;

0x0168 0168 (360,360) coordinates;

0x0190 0190 (400,400) coordinates;

0xF800: Color;

0xFF00 Drawing operation ended.

Rectangular field XOR, highlight and invert twice

5A A5 1D 82 5440 000D 0002 0168 0168 0190 0190 F800 0190 0190 01C2 01C2 F800 FF00

0x5AA5: Frame header;

0x1D: Data length;

0x82: Write instruction;

0x5440: VP;

0x000D: Rectangle XOR;

0x0002: Rectangular XOR twice;

0x0168 0168 (360, 360) coordinates;0x0190 0190 (400, 400) coordinates; 0xF800: Colors;

0x0190 0190 (400, 400) coordinates;0x01C2 01C2 (450, 450) coordinates; 0xF800: Colors;

0xFF00: Drawing operation ended.

Rectangular field XOR, highlight and inverse color display three times

5A A5 27 82 5440 000D 0003 0168 0168 0190 0190 F800 0190 0190 01C2 01C2 F800 01C2 01C2 01F4 01F4 F800 FF00

0x5AA5: Frame header;

0x1D: Data length; 0

0x82: Write instruction;

0x9010: VP;

0x000D: Rectangle XOR;

0x0003: Rectangular field XOR three times;

0x0168 0168 (360, 360) coordinates;0x0190 0190 (400,400) coordinates; 0xF800: Colors;

0x0190 0190 (400, 400) coordinates;0x01C2 01C2 (450,450) coordinates; 0xF800: colors;

0x01C2 01C2 (450,450) coordinates; 0x01F4 01F4 (500,500) coordinates; 0xF800: Colors;

0xFF00: Drawing operation ended.

## 7.22.14 Two-Color Bitmap Display

### (1)Function

Two- color bitmap can be used for special characters or graphics display .

Generally, special characters or graphics usually use icon or the background image ,here mainly for your understanding of the function.

### (2) Explanation

( 1) X, Y: the bitmap displays the coordinates of the upper left corner of the rectangular field. The height of the X coordinate is the judgment condition, and the starting position of the character area is displayed.


②X\_Dots, Y\_ Dots: the number of lattice arrays in X and Y directions;

③ Display color corresponding to "1 " bit: foreground color;

④ Display color corresponding to "0" bit: background color;

⑤ Display data: directly use modulus data.

0x000E	Two-color bitmap display	0x00	(x,y)s	The bitmap shows the coordinates of the upper left corner of the rectangular filed. The height of the X coordinate is byte as the judgment condition.
		0x02	X_Dots	Number of bitmap X_direction lattice.
		0x03	Y_Dots	Number of bitmap Y_direction lattice.
		0x04	Color1	Display color corresponding to "1"bit
		0x05	Color0	The display color corresponding to the "0" bit; if Color0 and Color1 are set to be the same, it means that the "0" bit does not need to be displayed and skipped directly.
		0x06	Data Pack	Display data, MSB mode; in order to facilitate users to read and write data, each line of data must be aligned to a word, that is, the next line of data always starts from a new data word (Word).

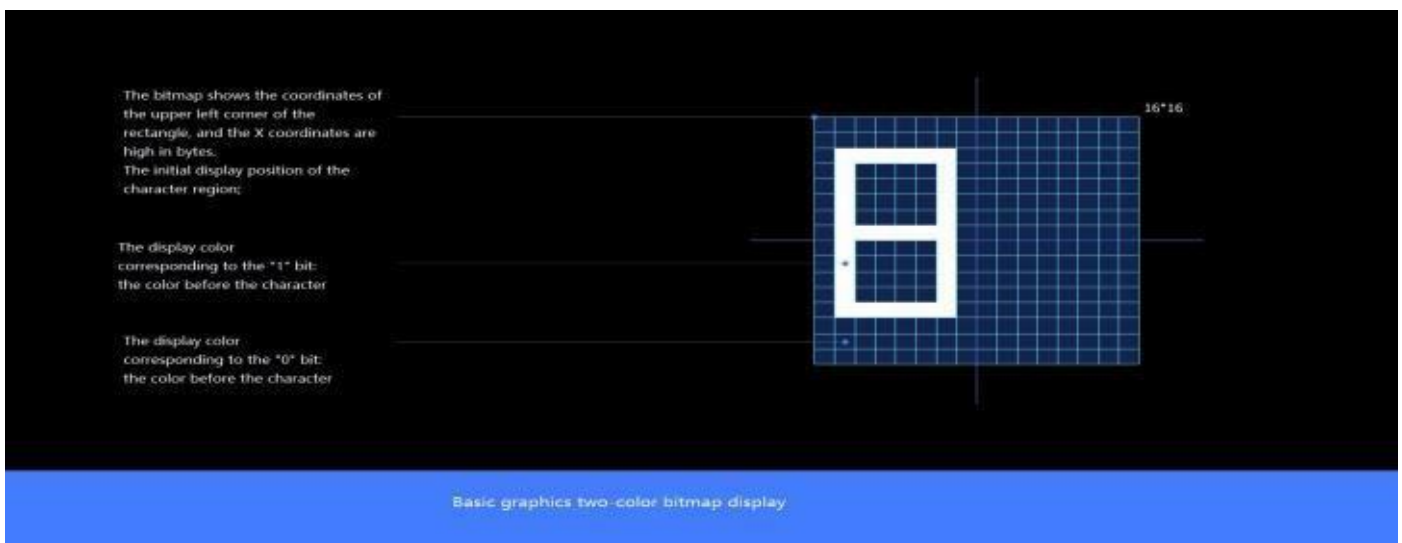

Bitmap Character Description

(3) the character "8" dot matrix module program

Website: <https://www.zhetao.com/fontarray.html>

(4) Instruction examples

① Display character graphic "8" in the range of 15\*15 dot matrix

Tx: 5A A5 35 82 5440 000E 0001 0168 0168 000F 000F F800 07E0 0000 0000 0000 3C00 4200 4200 4200 2400 1800 2400

4200 4200 4200 3C00 0000 0000 FF00

0x5AA5: Frame header;

0x35: Data length 53 bytes.

0x82: Write instruction;

0x5440: VP;

0x000E:Two-color bitmap instruction;

0x0001: Write a character;

0x0168, 0x0168: The upper left coordinates of the character;

0x000F, 0x000F:The number of dots in the character display area;



0xF800: Color1 character color;

0x07E0: Color0 character background color;

0x0000 0000 0000 3C00 4200 4200 2400 1800 2400 4200 4200 4200 4200 4200 3C00 0000 0000:

0xFF00: End character.

② Display character graphic "C" within the range of 15 \* 15 dot matrix

Tx: 5A A5 35 82 5440 000E 0001 0168 0168 000F 000F F800 07E0 6000 91F4 960C 6C04 0804 1800 1800 1800  
1800 1800 1800 1800 1800 1800 1800 0800 0C04 0608 01F0 0000 FF00

### 7.22.15 Four-Color Bitmap Display

Each pixel point is represented by 2 bits of a color, 00/11 combined into a total of 4 numbers 00, 01, 10, 11, which can correspond to 4 colors respectively, and then convert the 32 bit data of the double word into hexadecimal data, which is the data to be sent.

The number of pixel matrix in the bitmap area must be a multiple of 16, otherwise it will not be displayed.

Application data can be refreshed to show different graphics as needed. Users can also use multiple display controls of different vp to make all kinds of effects.

#### (1) Instruction storage format

0x0012	Four-color bitmap	0x00	2	(x, y) s	The upper left coordinates of the displayed bitmap, and the high byte of the x- coordinate is the judgment condition. <b>The starting VP address must be even ( double- word aligned) .</b>
		0x02	1	X_Dots	The number of bitmap X-direction pixels, which must be divisible by 16 .
		0x03	1	Y_Dots	The number of bitmap Y- direction pixels.
		0x04	1	Color0	The display color corresponding to the "00" bit.
		0x05	1	Color1	The display color corresponding to the "01" bit.
		0x06	1	Color2	The display color corresponding to the "10" bit.
		0x07	1	Color3	The display color corresponding to the "11" bit.
		0x08	N	Data_Pack	Display data in MSB. Each line of data must be aligned to a double word ( 16 pixels) for users to read and write the data.

#### (2) Instruction examples

Take 16\* 16 pixel matrix as an example to display 4- color bitmap basic graphics, the graphic pattern to be displayed is as follows .

Tx: 5A A5 59 82 5440 0012 0001 0168 0168 0010 0010 FFFF F800 07E0 0000 0000 0000 0000 0000 0000  
0000 0000

00FF AA00 00FF AA00 00FF AA00 00FF AA00 0055 FF00 0055 FF00 0055 FF00 0055 FF00 0000 0000 0000 0000  
0000 0000 0000 0000 FF00

Meaning:

0x5A A5: Frame header.

0x59: 89 bytes of data length.

0x82: Write instruction.

0x5440: VP.

0x0012: Four-color bitmap.

0x0001: Number of graphics.



0x0168 0x0168: the upper left coordinates of the displayed bitmap

0x0010 0x0010: the number of bitmap X- and Y-direction pixels, must be divisible by 16, e.g. 0x 10 for 16 pixels, 0x20 for 32 pixels, otherwise it will not be displayed.

0xFFFF: White, color 0; set the display color corresponding to the "00" bit.

0xF800: Red, color 1; set the display color corresponding to "01" bit.

0x07E0: Green, color 2; set the display color corresponding to "10" bit.

0x0000: Black, color 3; set the display color corresponding to the "11" bit.

0x0000 0000: Line 1 double word data.

0x0000 0000: Line 2 double-word data.

0x0000 0000: Line 3 double-word data.

0x0000 0000: Line 4 double-word data.

0x00FF AA00: Line 5 double-word data.

0x00FF AA00: Line 6 double-word data.

0x00FF AA00: Line 7 double-word data.

0x00FF AA00: Line 8 double-word data.

0x0055 FF00: Line 9 double-word data.

0x0055 FF00: Line 10 double-word data.

0x0055 FF00: Line 11 double-word data.

0x0055 FF00: Line 12 double-word data.

0x0000 0000: Line 13 double-word data.

0x0000 0000: Line 14 double-word data.

0x0000 0000: Line 15 double-word data.

0x0000 0000: Line 16 double-word data.

0xFF00: Terminator.

### (3) Data description

Color0	The display color corresponding to the "00" bit.
Color1	The display color corresponding to the "01" bit.
Color2	The display color corresponding to the "10" bit.
Color3	The display color corresponding to the "11" bit.


Each pixel point is represented by 2 bits of a color, 00/11 combined into a total of 4 numbers 00, 01, 10, 11, which can correspond to 4 colors respectively, and then convert the 32 bit data of the double word into hexadecimal data, which is the data to be sent.

The following figure shows the 16\* 16 pixel area.

Binary data of double words																Hexadecimal data	
	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	
0	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
1	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
2	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
3	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
4	00	00	00	00	11	11	11	11	10	10	10	10	00	00	00	00	00FF AA00
5	00	00	00	00	11	11	11	11	10	10	10	10	00	00	00	00	00FF AA00
6	00	00	00	00	11	11	11	11	10	10	10	10	00	00	00	00	00FF AA00
7	00	00	00	00	11	11	11	11	10	10	10	10	00	00	00	00	00FF AA00
8	00	00	00	00	01	01	01	01	11	11	11	11	00	00	00	00	0055 FF00
9	00	00	00	00	01	01	01	01	11	11	11	11	00	00	00	00	0055 FF00
10	00	00	00	00	01	01	01	01	11	11	11	11	00	00	00	00	0055 FF00
11	00	00	00	00	01	01	01	01	11	11	11	11	00	00	00	00	0055 FF00
12	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
13	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
14	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000
15	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	00	0000 0000

①
②

#### (4) Effect

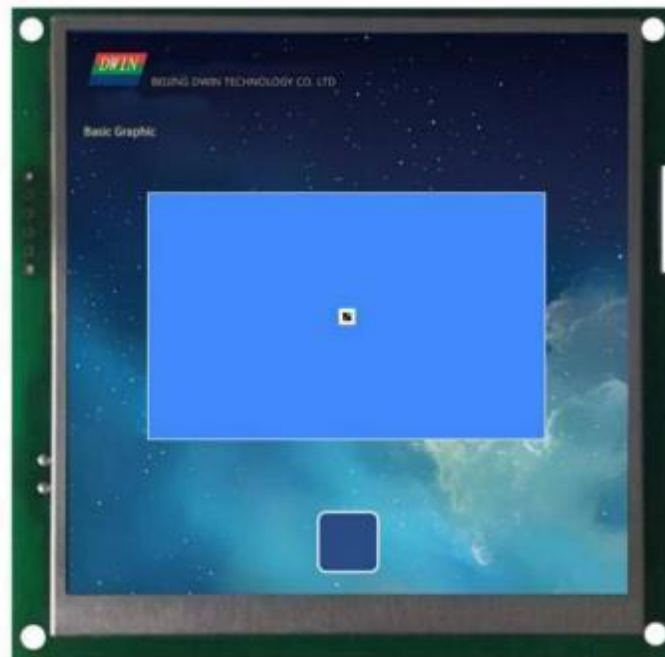





## 7.22.16 Ellipse Display

Ellipse display + fill (the ellipse function needs to use the UI kernel of V41\_Increase Ellipse Display\_20210802).  
For ellipse display example, set VP of basic graphic display control to 0x5440. It is the same for the ellipse filling.  
Filling closed area requires the background image to be a solid color, otherwise the filling will display abnormally.

Step 1: Display an Ellipse

5A A5 13 82 5440 0011 0001 0168 0168 0032 0016 F800 FF00

0x5AA5: Frame header;

0x13: Data length;

0x82: Write instruction;

0x5440: VP;

0x0011: Draw ellipse instruction;

0x0001: Draw an ellipse;

0x0168 0168: The coordinates of the ellipse center;

0x0032: The diameter of the major axis of the ellipse;

0x0016: The diameter of the minor axis of the ellipse;

0xF800: Arc color;

0xFF00: Terminator.

Step 2: Ellipse Fill

5A A5 0F 82 5540 0008 0001 0168 0168 07FF FF00

0x5AA5: Frame header;

0x0F: Data length;

0x82: Write instruction;

0x5440: VP;

0x0008: Fill instruction;

0x0001: Fill the closed area;

0x0168 0168: The coordinates of the ellipse center;

0xF800: Fill color;

0xFF00: Terminator.

## 7.23 Process Bar

### 7.23.1 Instruction Storage Format

SP offset	Definition	Length (bytes)	Description
	0x5A23	2	
	*SP	2	Variable SP, 0xFFFF means loaded by configuration file.
	0x000D	2	
0x00	*VP	2	Process bar data display pointer.
0x01	(Xs, Ys)	4	The coordinates of the upper left corner of the process bar display area.
0x03	(Xe, Ye)	4	The coordinates of the lower right corner of the process bar display area.
0x05	Border color	2	
0x06	Foreground color	2	
0x07	Background color	2	
0x08	Variable Max.	2	Corresponding to 100% progress, integer, -32768 to 32767.
0x09	Variable Min.	2	Corresponding to 0% progress, integer, -32768 to 32767.
0x0A_H	Mode	1	.7 Return the percentage data of the progress bar to the specified variable control, 0=do not return, 1=return. .1-.0 Border display mode 0x00: Display the outer border and fill the background. 0x01: Do not display the outer border, fill the background. 0x02: Display the outer border without filling the background. 0x03: Do not display the outer border, do not fill the background.
0x0A_L	Direction		0x00=Right 0x01=Left 0x02=Up 0x03=Down
0x0B_H	Type of data		0x00=integer 0x01=variable high byte 0x02=variable low byte
0x0B_L	Reserve	1	Reserved, write 0x00.
0x0C	*VP_RT	2	The calculated progress bar percentage (unit 1%) returns the pointer address, and the returned data is an integer, 0x0000-0x0064.

## 7.23.2 Software Setting

**progress bar**

X: 570 Y: 36 W: 270 H: 370 Locked

name: ProcessBar

SP(0x): FFFF

VP(0x): 2000

border color: F800

forecolor: 07E0

backcolor: FFE0

max: 100

min: 0

☐ rate addr

☒ border

☒ background

orientation: right

type: int

ini: 0

Coordinates of the upper left corner, defining the position of the graphic

Width and height, defining the touch range area

Dynamically modify attributes in combination with SP offsets

The variable storage space 0x1000-0xFFFF can be freely used by users. The progress bar display occupies 1 address, that is, the addresses of non-associated controls need to be spaced apart. System variable interface address range: 0x0000-0x0FFF (such as page switching address 0x0084)

Foreground color

Border color

Background color

The maximum and minimum values are the data range, integer type -32768 to 32768. Such as setting 0~100, -100~100

Unchecked: You can associate a data variable display control, the address of the variable is the same as the address of the process bar, and it will be displayed in the form of data and process bar after adjusting the parameters. Check: If you set the percentage address 0x6050, set the data variable display address 0x6050, it is recommended to distinguish the percentage address from the variable address. After adjusting the parameters, the data is displayed in the form of percentage and process bar.

Check Show Border and Fill Background

Right: Left: UP: Down:

Uncheck Show Border and Fill Background Effects. It is recommended to check it so that the graph range can be displayed intuitively

Integer type -32768 to 32767; When setting the high/low byte, please pay attention to the same display variables to avoid data display errors

The data value displayed on power-on also needs to write 0x38 at address 0x05 of the CFG file. Indicates that data uploading is enabled, 22 initial value files are loaded, and touch sound is enabled.

## 7.23.3 Example of Instructions

①For example, if the data range is 0-100, the data display is consistent with the percentage.

The data shows 0, the percentage shows 0%, and the process does not show: 5A A5 05 82 6000 0000

The data shows 50, the percentage shows 50%, and the process does not show half: 5A A5 05 82 6000 0032

The data shows 100, the percentage shows 100%, and the process shows: 5A A5 05 82 6000 0064

②For example, if the data range is -32768 to 32767, the percentage will be displayed in equal parts according to the average, and the data variables will be displayed normally.

The data display is -32768, the percentage display is 0%: 5A A5 05 82 6000 8000 (the complement of the negative number sent by the data)

Data display 0, percentage display 50%: 5A A5 05 82 6000 0000

The data shows 327, the percentage shows 50%: 5A A5 05 82 6000 0147

The data shows 328, and the percentage shows 51%: 5A A5 05 82 6000 0148

Display data 982, percentage display 51%: 5A A5 05 82 6000 03D6

Display data 983, percentage display 52%: 5A A5 05 82 6000 03D7

The data shows 32767, and the percentage shows 100%: 5A A5 05 82 6000 7FFF

③For example, if the data shows -100 to 100, the percentage will be displayed in equal parts according to the average, and the data variables will be displayed normally.

Display data -100, percentage display 0%: 5A A5 05 82 6030 FF9C (0xFF9C negative number 100. Complement code of negative number: the sign bit is 1, and the remaining bits are the original code of the absolute value of the number; then the whole number Add 1. If you enter -200, it will return 5A A5 06 83 68 20 01 FF 38, and the returned data 0xFF38 is the entered data -200.)


Display data 0, percentage display 50%: 5A A5 05 82 6030 0000

Display data 1, percentage display 51%: 5A A5 05 82 6030 0001

Display data 2, percentage display 51%: 5A A5 05 82 6030 0002

Display data 3, percentage display 52%: 5A A5 05 82 6030 0003

### 7.23.4 Effect

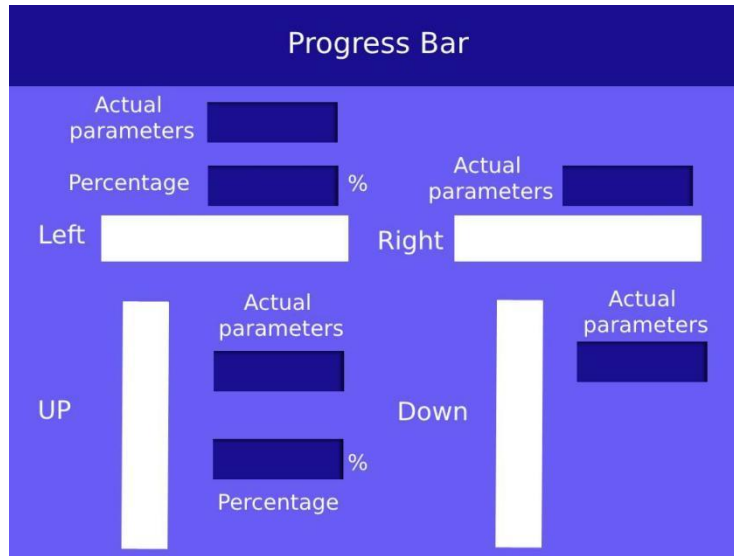


## 7.24 Zone Scrolling

The zone scrolling control is to move the contents of the specified area around, and the moving direction can be set. It can be used to simply realize dynamic running effects such as flow charts and progress bars on the screen. The VP is handled by the underlying system, and the user does not need to set it.

### 7.24.1 Instruction Storage Format

SP offset	Definition	Length (bytes)	Description
0x00	VP	2	A word variable to hold the panning data. Not available to the user.
0x01	(x, y) s	4	The coordinates of the upper left corner of the moving area.
0x02	(x, y) e	2	The coordinates of the upper right corner of the moving area.
0x05	Dis_Move	2	Move speed.
0x06_H	Mode_Move	2	Shift left 0x01= Shift right 0x02= Shift up 0x03= Shift down.

## 7.24.2 Software Setting

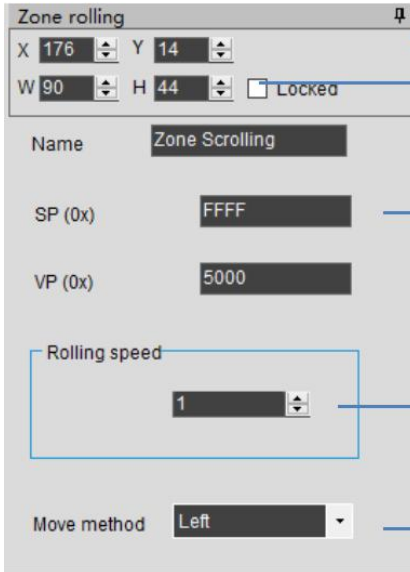

The screenshot shows the 'Zone rolling' configuration window. It includes fields for X (176), Y (14), W (90), and H (44), a 'Locked' checkbox, a 'Name' field (Zone Scrolling), SP (0x) (FFFF), VP (0x) (5000), a 'Rolling speed' field (1), and a 'Move method' dropdown (Left). Annotations point to these fields with the following descriptions:

- Coordinates of the upper left corner of the display area (points to X and Y)
- Display area width and height (points to W and H)
- Set by default or actual needs (points to SP)
- Set the moving distance of the selected area in a single cycle, that is the number of pixels. (points to Rolling speed)
- The mode of moving up, down, left, and right of the frame selection area. (points to Move method)

The variable is occupied by the system and should not be used by the user.

## 7.25 QR Code

The QR code control is to display the designated QR code on the screen according to the designated content.

### 7.25.1 Instruction Storage Format

Address	SP offset	Definition	Length (bytes)	Description
0x00		0x5A25		
0x02		*sp		Variable description pointer, 0xFFFF means loaded from the configuration file.
0x04		0X0008		
0x06	0x00	*VP	2	Variable pointer. The content of the QR code is up to 45 8 Bytes, and 0x0000 or 0xFFFF is the terminator.
0x08	0x01	(x, y)	4	The coordinate position of the upper left corner displayed by the QR code. There are two types of QR code graphics: 45 * 45 unit pixels ( data less than 155 bytes) and 73*73 unit pixels (data less than 459 Bytes).
0x0C	0x03	Unit_Pixels	2	The physical pixel lattice size occupied by each QR code unit pixel, 0x01- 0x07 . Set Unit_Pixels=4 , then each unit pixel will be displayed as 4* 4 lattice size.
0x0E	0x04:H	Fix_Mode	1	0x01: Fixed as 73*73 unit pixel format QR code. The rest: automatically match the QR code size according to the Data length.
0x0F	0x04:L	Display_Mode	1	bit definition, .7 QR code color 0: The fixed background is white and the QR code is black. 1: Color is defined by Color0, Color1. .6-.0 is undefined, write 0.
0x10	0x05	Color0	2	Background color.
0x12	0x06	Color1	2	QR Code color.
0x14-01F	0x07	Reserved	1	Undefined, write 0x00.

### 7.25.2 Software Setting

Open DGUS, click display control – QR code, then set the control display area, and configure VP, the physical pixel size occupied by each QR code unit pixel, etc.

**QR code**

X 112 Y 5

W 86 H 45 ☐ Locked

Name QR Code

SP (0x) FFFF

VP (0x) 5240

Unit\_Pixels 4

Fix mode fit to the size

display color black white

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF. The Max. display of the QR code is 259 (Word). That is, the non-associated control key addresses need to be spaced apart. System variable interface address range: 0x0000-0x0FFF.

The size of the physical pixel dot matrix occupied by each two-dimensional code list without pixels, range: 0x01-0x07. Set Unit\_pixels=4. Then each unit pixel will be displayed as a 4\*4 dot matrix size.

### 7.25.3 Example of Instructions

1) Send an instruction to display the URL [http:// www.dwin.com .cn/](http://www.dwin.com.cn/) QR code.

5A A5 1C 82 5240 68 74 74 70 3A 2F 2F 77 77 77 2E 64 77 69 6E 2E 63 6F 6D 2E 63 6E 2F FFFF

0x5AA5: Frame header;

0x1C: Data length;

0x82: Write instruction;

0x5240: VP;

0x68 74 74 70 3A 2F 2F 77 77 77 2E 64 77 69 6E 2E 63 6F 6D 2E 63 6E 2F : the ASCII code of the URL;

0xFFFF: Terminator.

If the size of the QR code needs to be fixed, You can set SP to 0x8000, offset 5 bits from

SP. Then write 0x01 to 8005 to fix the size of QR code.

2) QR code background and foreground color modification.

Set the QR code display control VP address 0x8000 with the following example command: Turn off default black and white, 0x04L .7 bits write 0:

5A A5 0582 8004 0000

On to change the color, 0x04L .7 bits write 1:

5A A5 0582 0080 0000

5A A5 0582 8004 0080; 1000 0000 binary converted to hexadecimal as 0x80

Background color change to **blue**, VP address 0x8000 + 0x05 change background color

5A A5 0582 8005 **1800**; 0x1800 blue value

Background color change to **green**, VP address 0x8000 + 0x05 change background



color 5A A5 0582 8005 07E0; 0x07E0 green value

Foreground color change to red, VP address 0x8000 + 0x06 change foreground color

5A A5 0582 8006 C800; 0xC800 red value

Foreground color change to purple, VP address 0x8000 + 0x06 change foreground color 5A A5 0582 8006

B900; 0xB900 purple value

#### 7.25.4 QR code instruction display effect



## 7.26 Brightness

The brightness control is used to adjust the display brightness of the specified display area, and is used to highlight or fade the background display.

The difference between this control and the backlight adjustment system variable interface is that the backlight is to adjust the brightness of the whole screen.

### 7.26.1 Instruction Storage Format

SP Offset	Definition	Length (bytes)	Description
0x00	*VP	2	Upper- left coordinates of the Icons to display.
0x01	(Xs, Ys)	4	Specifies the coordinates of the upper left corner of the area.
0x03	(Xe, Ye)	4	Specifies the coordinates of the upper right corner of the area.
	Reserved	18	Undefined, write 0x00 .

### 7.26.2 Software Setting

Brightness

X 118 Y 30
W 126 H 41
☐ Locked

Name

SP(0x)

VP(0x)

Coordinates of the upper left corner of the display area

Display area width and height

Set by default or actual needs

The variable storage space user can use the address range arbitrarily: 0x1000-0xFFFF.  
Area brightness adjustment occupies 1 address. That is, the non-associated control key addresses need to be spaced apart.  
System variable interface address range: 0x0000-0x0FFF.

### 7.26.3 Examples of Instruction

5A A5 05 82 5432 0032

0x5AA5: Frame header;

0x05: Data length;

0x82: Write instruction;

0x5432 VP;

0x0032 Brightness value. (Range 0x00-0x64, 100-level brightness adjustment)

## 7.27 Data Transmit

After the page is switched, the predefined data is transferred to the variable or UART once.

### 7.27.1 Instruction Storage Format

Address	SP offset	Definition	Data length (byte)	Description
0x00		0x5A30	2	
0x02		*SP	2	Variable description pointer, 0xFFFF means loaded by the configuration file.
0x04		0x000D	2	
0x06	0x00	*VP	2	The target pointer for data transfer. When the variable is valid for the first time on the current page, the data is written to the pointer pointed to by VP according to the following format. Variable memory space: PAGE_ID + predefined 22 bytes data Each variable occupies 12 words of space.
0x08	0x01:H	AUTO_COM En	1	Select whether to actively upload the variable data to the user when the variable is first started on the current page Serial port: 0xFF=upload (each page can only have 1 upload variable), the rest =no upload.
0x09	0x01:L	Reserved	1	Write 0x00
0x0A	0x06	Predefined data	22	The max length of data preset by the user is 22 bytes.

### 7.27.2 Software Setting

X 124 Y 27  
W 73 H 47 ☐ Locked

Name Data transmit  
SP(0x) FFFF  
VP(0x) 0000  
upload or not  
Yes  
predefined data(0x):

Coordinates of the upper left corner of the display area  
Display area width and height  
Set by default or actual needs  
The variable storage space user arbitrarily uses the address range: 0x1000-0xFFFF. At most 11 address spaces are occupied, and the on-associated key address need to be spaced apart.  
The target pointer of data transfer, when the variable is valid for the first time on the current page.  
Write data to the variable memory space pointed to by VP in the following format:  
PAGE\_ID + predefined 22-byte occupies 12 words space for each variable.  
Choose whether to automatically send the variable data to the user serial port when the variable is started for the first time on the current page.  
0xFF = upload (each page can only have one upload variable), the rest = no upload.  
The longest 22-byte data preset by the user.

## 7.28 Video

### 7.28.1 Instruction Storage Format

Address	SP offset	Definition	Data length (byte)	Description
0x00		0x5A31	2	
0x02		*SP	2	Parameter pointer. 0xFFFF means loaded by the configuration file.
0x04		0x0008	2	
0x06	0x00	*VP	12	<p>Variable data pointer, must be even, occupies 12 bytes.</p> <p>User control interface, double word, VP and VP+ 1 position are defined as follows.</p> <p>D3: 0x5A means digital video playback is on, otherwise it is off.</p> <p>D2: Playback status control, DGUS will clear after processing.</p> <p>0x01= Stop, the screen stays at the first frame.</p> <p>0x02= Pause/resume playback.</p> <p>0x03 = Playback from the specified position ( position is determined by D1:D0).</p> <p>D1:D0: Playback start position in seconds, valid only when D2=0x03 .</p> <p>Status feedback interface, two double words, VP+ 2 to VP+ 5 positions, user can only read.</p> <p>D7: Current playback status feedback, 0x00= Stop, 0x01= Playing.</p> <p>D6:D4: Undefined.</p> <p>D3:D2 Total video length, 0x0000-0xFFFF, in seconds.</p> <p>D:D0 Current playing video position, 0x0000-0xFFFF in seconds.</p>
0x08	0x01	(x, y)	4	The coordinates of the upper left corner of the video display window on the screen.
0x0C	0x03	Wide_X	2	The width of the video display window on the screen.
0x0E	0x04	Wide_Y	2	The height of the video display window on the screen.
0x10	0x05:H	FPS_Video	1	Frame rate of video playback(frames/sec)
0x11	0x05:L	Type_Video	1	<p>Digital video category.</p> <p>0x00: Digital video for the combination of ICL files and WAE files.</p> <p>Other: undefined.</p>
0x12	0x06	File_ID_ICL	2	ID of the ICL file where the video picture is stored, 0x0000-0xFFFF.
0x14	0x07	File_ID_WAE	2	<p>The WAE file ID where the audio is stored, 0x0000-0xFFFF.</p> <p>The audio is in 32KHz sampled WAV format and is saved in 0x00 of the file.</p>
0x16	0x08:H	Reserved	10	Undefined

## 7.28.2 Software Setting

**Coordinates of the upper left corner of the display area**

**Display area width and height**

The variable storage space user arbitrarily uses the address range: 0x1000-0xFFFF. Digital video playback occupies 6 addresses. That is, the address of non-associated controls need to be spaced 6. System variable interface address range: 0x0000-0x0FFF.

SP start address, which can be used in combination with the offset address to dynamically modify the properties of the control. Generally, this can be set by default.

ICL video file frame rate, e.g. 24 fps, 30 fps, determined according to the source video.

ICL is the video file and WAE is the audio file. Generally, set by default.

The ICL file and the WAE file together occupy 16MB of memory space. E.g., the size of 36.ICL file in DEMO is 4.28MB, it takes up  $4.28 \times 1024 / 256 = 17.12$ , which requires 18 256KB subspaces,  $36 + 18 = 54$ , the next file needs to be named from 55.

## 7.28.3 ICL&WAE file

ICL file making procedures:

**1. Welcome**  
Click "welcome" Engineering management

**2. WAE Generator**  
Click "WAE generator"

**3. Movie Tool**

**4. Choose the video file you have prepared.**

**5. Set the video resolution as you want as long as within the screen resolution range.**


**6. It is the image quality and ultra low is available.**

**7. The audio is in 32KHZ, sampled WAV format and saved in the 0x00 segment of the file. At this point the ID must be named 00, otherwise the video can not be played. Then save and convert it to the WAE format.**

**8. Save the ICL video (image) files in the DWIN.SET folder of the project. Note that the naming should not conflict. The naming can be done as ID+length+frame rate format for easy file identification, e.g. example: 36\_65 length 30 frames per second. The ICL file and the WAE file together occupy 16MB of the memory space. E.g., the size of 36.ICL file in DEMO is 4.28MB, and it takes up  $4.28 \times 1024 / 256 = 17.12$ , which requires 18 256KB subspaces,  $36 + 18 = 54$ , the next file needs to be named from 55.**



WAE file making procedures:

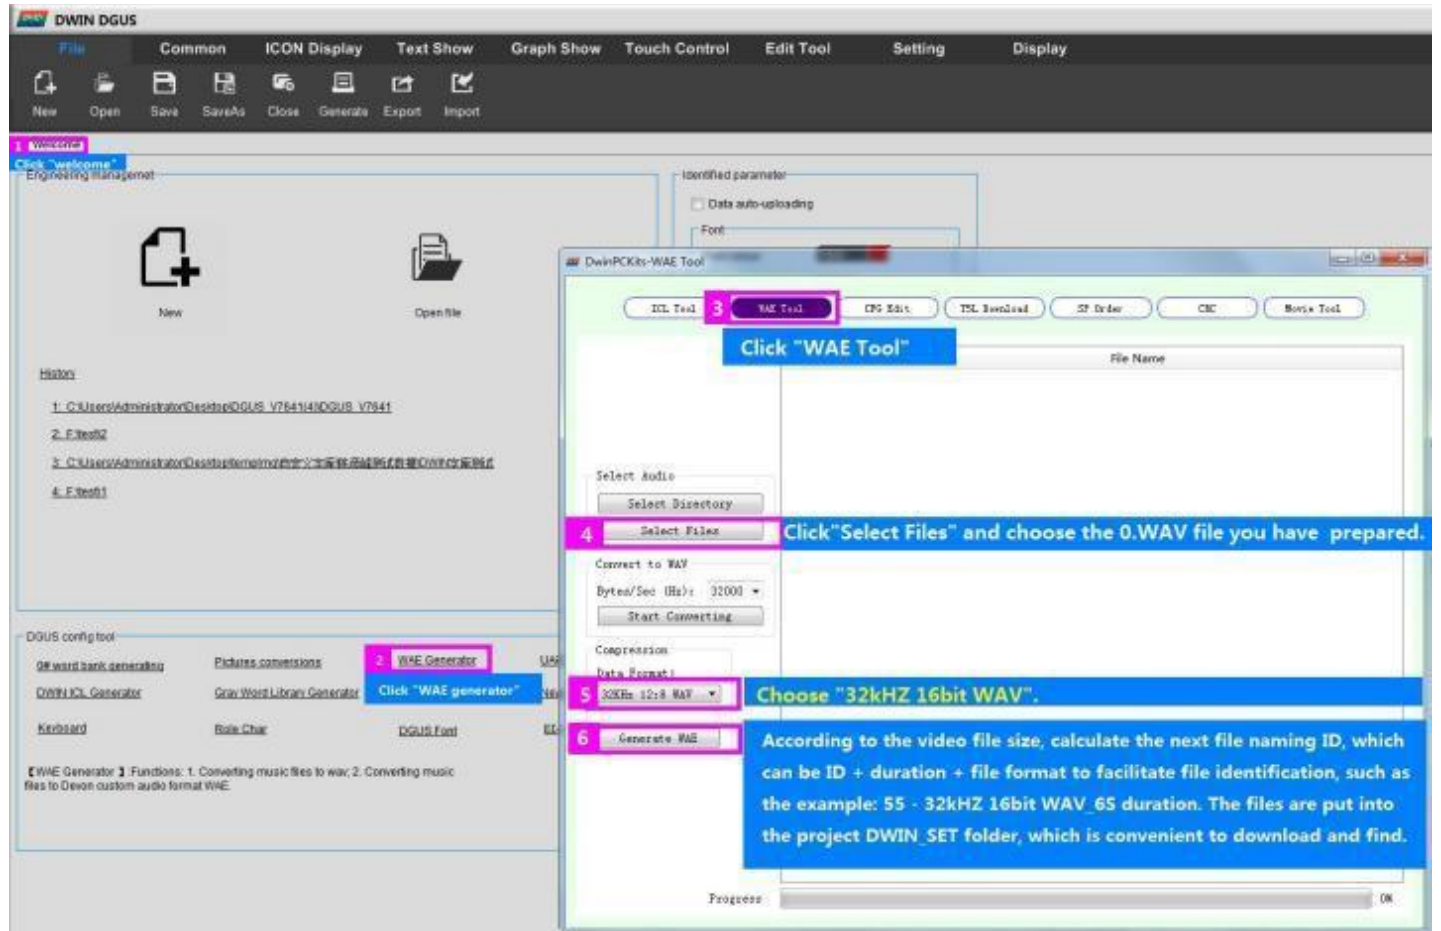



## 7.28.4 Instruction examples

Address	SP offset	Definition	Data length( byte)	Description
0x06	0x00	*VP	12	<p>Variable data pointer, must be even, occupies 12 bytes.</p> <p>User control interface, double word, VP and VP+1 position are defined as follows.</p> <p>D3: 0x5A means digital video playback is on, otherwise it is off.</p> <p>D2: Playback status control, DGUS will clear after processing.</p> <p>0x01 = Stop, the screen stays at the firstframe.</p> <p>0x02 =Pause/resume playback.</p> <p>0x03 = Playback from the specified position ( position is determined by D1:D0).</p> <p>D1:D0: Playback start position in seconds, valid only when D2=0x03.</p> <p>Status feedback interface, two double words, VP+ 2 to VP+ 5 positions, user can only read.</p> <p>D7:Current playback status feedback, 0x00=Stop, 0x01=Playing.</p> <p>D6:D4: Undefined.</p> <p>D3:D2 Total video length, 0x0000-0xFFFF, in seconds.</p> <p>D1:D0 Current playing video position, 0x000-0xFFFF in seconds.</p>

Set the project display curves using 8 channels, i.e. 0x1000-0x4FFF address is occupied, here the address is used arbitrarily from 0x5000, the video duration is 10S, the instructions are as follows .

### (1) Play

Start playback can be written to the address 0x5A03 , from the beginning of the second or the specified time to start playback, the instruction examples are as follows .

- ① Default playback from the 0th second: 5A A5 05 82 5000 5A 03
- ② Specify playback from the 0th second: 5A A5 05 82 5000 5A 03 0000
- ③ Specify playback from the 3rd second: 5A A5 05 82 5000 5A 03 0003
- ④ Specify playback from the 10th second: 5A A5 05 82 5000 5A 03 000A

### (2) Pause/re-play

Whether to send a instruction or touch, the first time is to play, the second time is to pause, and so on:

5A A5 05 82 5000 5A 02

### (3) Stop

When stopping, the screen stays at the first frame.

5A A5 05 82 5000 5A 01

### (4) Read playback status

High byte of VP+2 address, current playback status feedback, 0x00=stop, 0x01=play.

### ① Playing

Tx send: 5A A5 04 83 5002 01; status is located in the high byte of VP+2 address, read 1 word length data to determine the high byte.

Rx return: 5A A5 06 83 5002 01 0100; the high byte of VP+2 address is 0x01, which means playing.

### ② Stop status

Tx send: 5A A5 04 83 5002 01; status is located in VP+2 address high byte, read 1 word length data to judge high byte.

Rx return: 5A A5 06 83 5002 01 0000; the high byte of VP+2 address is 0x00, indicating the stop state.

### (5) Total video length

VP+ 4 address, total video length, 0x0000-0xFFFF, in second.

Tx send: 5A A5 04 83 5004 01; attribute is located at VP+4 address, read 1 word data.

Rx return: 5A A5 06 83 5004 01 0006; 0x0006 indicates the total video length of 6S, which can be used as the total playback length.

### (6) The current playback video position

VP+ 5 address, the current playback video position, 0x0000-0xFFFF, in seconds

Tx send: 5A A5 04 83 5005 01; attribute is located at VP+5 address, read 1 word length data.

Rx return: 5A A5 06 83 5005 01 0001; 0x0001 indicates that the 1st second video is being played, which can be used as the current playback length position display.

Rx return: 5A A5 06 83 5005 01 0002; 0x0002 means in playing the 2nd second video, can be used as the current playback duration position display.

.....

Rx returns: 5A A5 06 83 5005 01 0006; 0x0006 means the 6th second of video is playing and can be used as the current playback position.


## 7.28.5 DEMO

Resolution : DEMO 800\*480, video 640\*360.


DEMO link: <http://inforum.dwin.com.cn:20080/forum.php?mod=viewthread&tid=6404> DEMO

function description.

- ① Use data variable to display, read VP+5 video position, and write to variable address to display.
  - ② Use return keycode, key value 0x5A03 to play.
  - ③ Use return keycode, key value 0x5A02 to pause.
  - ④ Use return keycode, key value 0x5A01 to stop.
  - ⑤ ⑥ Use synchrodata return to play from the specified position.
  - ⑦ Use incremental adjustment, cycle between lower limit 0 and upper limit 1, detect the variable address to upload key value 1, then refresh a play instruction at regular intervals, upload key value 0 to close the cycle play.
  - ⑧ use variable icon display, refresh icon position according to video duration, using 100 progress icons, or modify variable icon position with description pointer.
- For example, 100S video just corresponds to 100 icon state; 107S video corresponds to switching icon every 1.07S.
- ⑨ use drag adjustment, system variable interface 0x00 A1 high byte to adjust the volume.
  - ⑩ For multiple page playback, use return keycode to switch page, set key value to 0x5A01 for pause or 0x5A02 for stop, to close the previous video and audio after page switching.

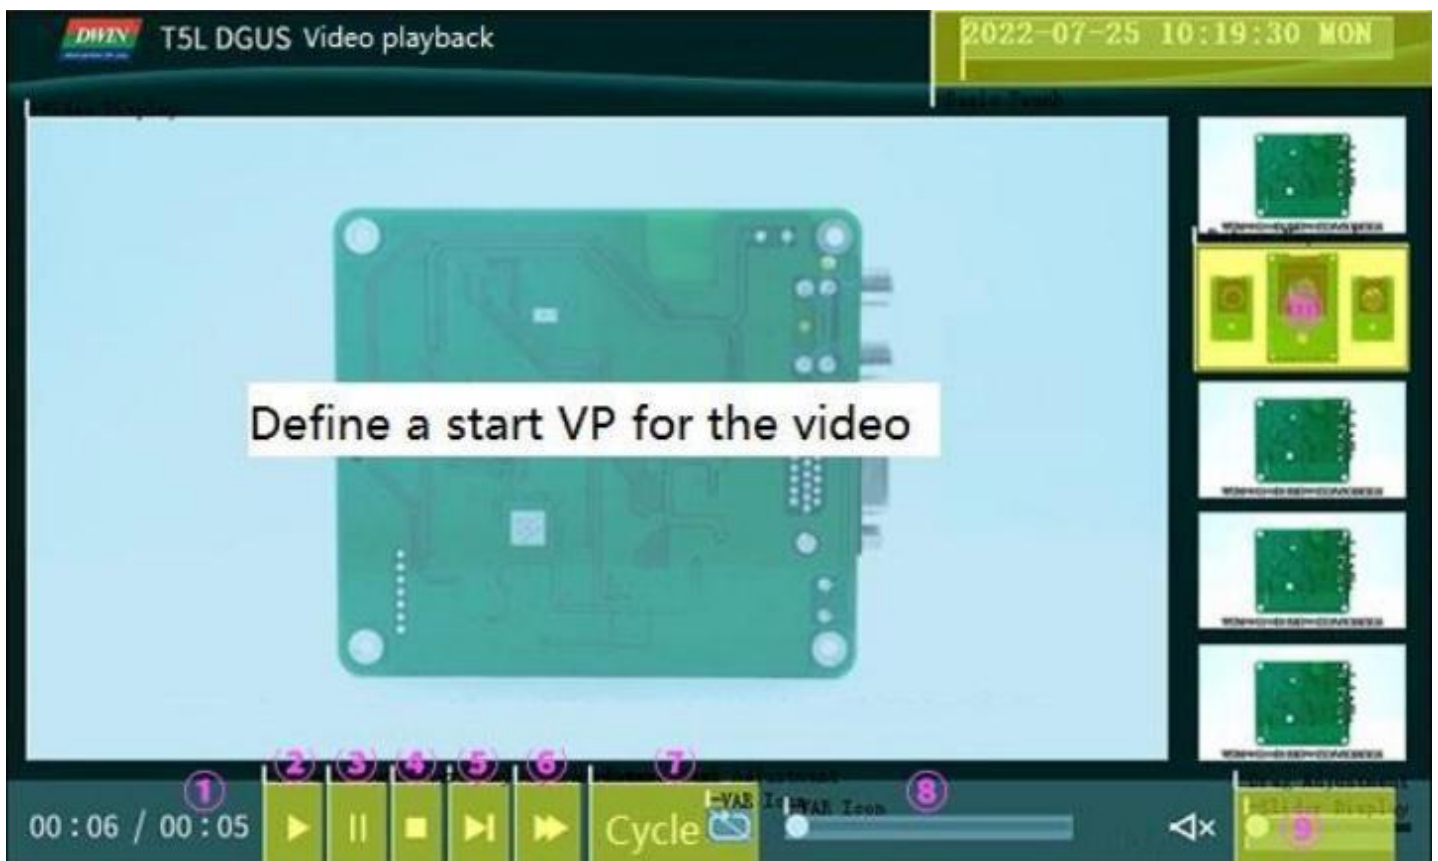

## 7.28.6 Effect

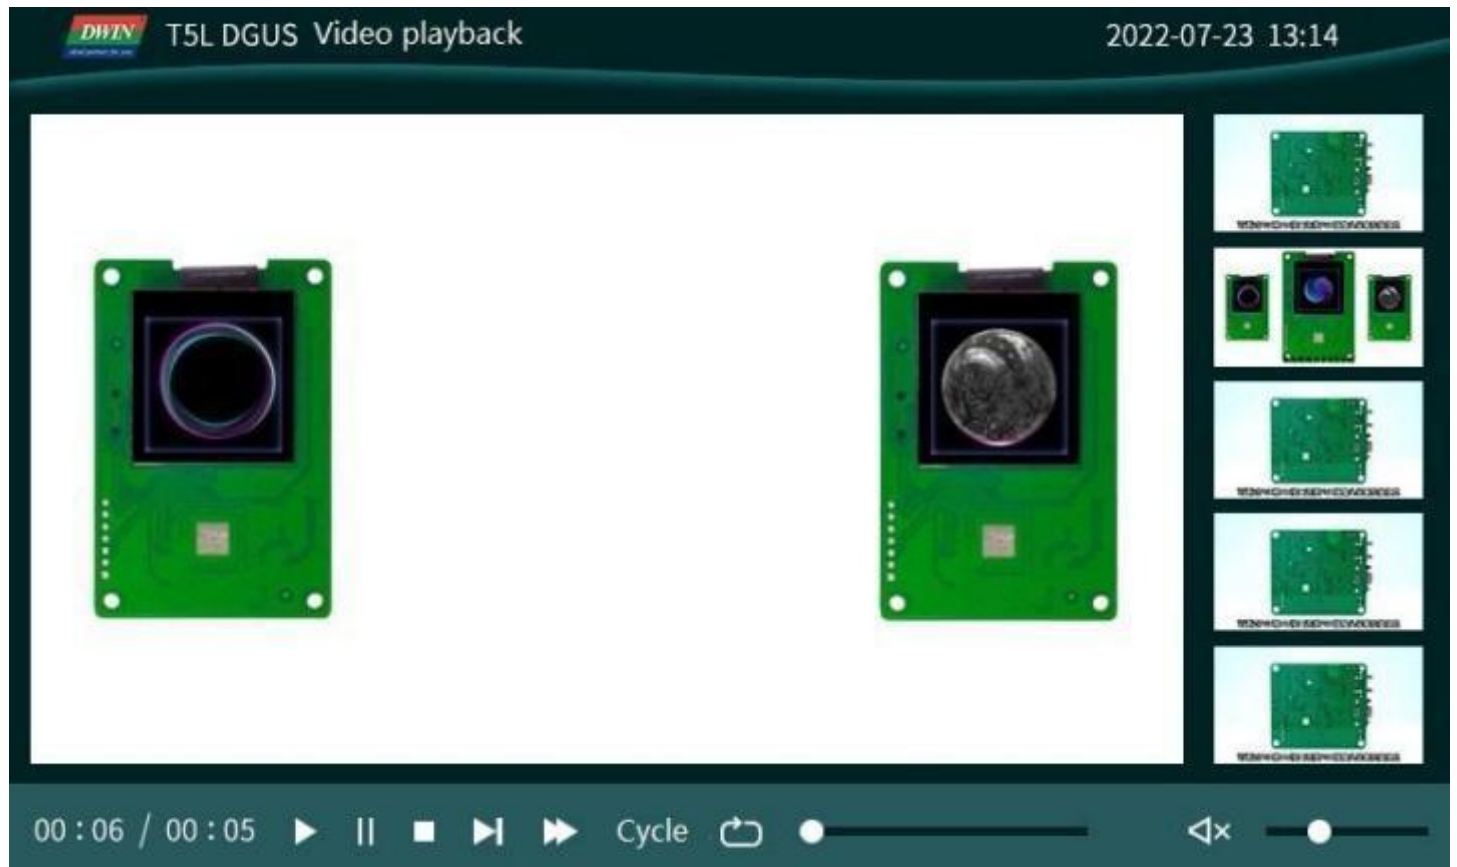

## 7.28.7 Video tutorial

Link: <http://inforum.dwin.com.cn:20080/forum.php?mod=viewthread&tid=6404>

You can also refer to the customer service to get the tutorial.

## Chapter 8 DGUS Basic Functions

### 8.1 Import

If you only have a DWIN\_SET folder, you can restore the project using the import function. Export is guide out of the project 13. bin, 14. bin pointer address EXCEL table.

Step 1: Open DGUS and create a project. The resolution should be consistent with the picture.

Step 2: Add all the images in DWIN\_SET to the new project.

Step 3: Select the original DWIN\_SET folder, click import, you can see the project control has been restored.

Step 4: Import successful, the original DWIN\_SET inside the icon library, character library and other files are copied to the new project DWIN\_SET. You just need to adjust the control position.

### 8.2 Edit tool

User can easily align the touch and display controls by this function, making the controls neat, beautiful and orderly.

Step 1: Selects the control s that need to be aligned;

Step 2: Click Edit tool-Up;

Step 3: Click the standard control, and then other control s will be aligned with it. Left- aligned, right- aligned, same size of controls can be set in the same way.

### 8.3 Front and Back

When the page sliding control and sliding adjustment control are superimposed, the former will be invalid if the former is under the latter. In this case, select the page sliding control and click Edit tool- front.

It is mostly used to add variable overlay and other functions to the icon.

### 8.4 Viewing the Usage of VP

In the process of development, it is necessary to check whether the VP or SP of the current project conflicts.

Click Display- Global check.

### 8.5 Preview

During the development, you can click Display\_ Preview from the current page to preview from the current position to check whether the project is set correctly.

Double- click the black border of the preview to exit.

### 8.6 New Resolution

When creating a new project, manually input the required resolution ( W\* H) value.

## 8.7 Converting Resolution

For example, change the resolution of 720\* 720 to 480\*480. In order to avoid the conversion damage of the original project, please make a copy of the original project as a backup.

Step 1: Click Setting\_ Set resolution, select the desired resolution, and click OK;

Step 2: Click File\_ Save As, select "Yes";

Step 3: Then click File\_ Save and Generate.

If the user copies controls of the larger resolution project to the smaller resolution project, you may find that the control disappears.

In this case, press Ctrl+ A to select all, and press " ↑" or " ←" on the keyboard. Then you will see the corresponding controls.

If icon or text display control are used, the size of them generally needs to be re-adjusted.

## 8.8 Replace T5 project with T5L project

If the resolution is the same, you can open the T5 DEMO by DGUS, make the background image 32 \_ background image. ICL file, and make the icon 48\_ Icon .ICL file.

That is, use 32. ICL and 48. ICL to replace the original . ICO and BMP format images. This part is detailed in chapter 3.

Since the DGUSI V5.04 13/ 14 files are not compatible with DGUS V7. 6 , the DGUSI screen cannot be modified directly. If you need to use T5L, you need to redo the DEMO.



## Chapter 9 Revision Record

Rev	Revise Date	Content	Editor
2.0	2022-04-12	First Edition	Rosy
2.1	2022-05-09	Update 7. 18.4	Rosy
2.2	2022-05-12	Update 7.27.4	Rosy
2.3	2022-05-20	Update instructions when CRC check is on	Rosy
2.4	2022-06-09	Update 3.3 CFG configuration attention	Rosy
2.5	2022-08-03	<ol style="list-style-type: none"> <li>1. Update 6.7 Text input 0x00F9, 0x00FA description</li> <li>2. Update 5. 1 System variable interface 0xB0 description</li> <li>3. Update 2.3 Features 256KB data variable space</li> <li>4. Add 7. 1 Four-color bitmap display and video control function</li> <li>5. Update 7.22. 1 basic graphics control</li> <li>6. Add 7.28 Video control function</li> <li>7. Added the option of downloading files with encryption.</li> <li>8 . Update 0x00E2 system variable interface, add bitmap export brightness threshold setting.</li> <li>9. Update 6. 1 0x0D bit button function.</li> <li>10. Update 4. 1 UART2 0x84(curve buffer write instruction), 0x86, 0x87(double-word read/write mode) instruction(OS core code should at least be V2.0) .</li> <li>11. Add 4.2 Virtual UART.</li> <li>12. Add 4.3 MODBUS development.</li> <li>13. Optimize the algorithm of 4-wire resistive touch screen, the touch screen is more accurate (you need to re-calibrate the touch screen once after upgrading).</li> <li>14. Add 6. 13 Bit button.</li> <li>15. 6.7.2. 1 Remove the note input method</li> <li>16. 7.5.3 Remove FSK camera subsection</li> <li>17. Update 7. 10 Icon overlay</li> <li>18. Update 7.9 Icon Page Tran</li> <li>19. Update 7.8 Bit icon</li> <li>20. Add 5. 1 FSK bus interface</li> <li>21. Add 3.3.1 GTF format and JPEG file description</li> <li>22. Add 3.3.2.5 0x21 0x8* = ILI231*/251* etc. ILI driver IC capacitive touch screen.</li> <li>23. Add effect image for touch controls.</li> <li>24. Add 5. 1 0x100 address description; 0x08 description.</li> </ol>	Rosy

2.6	2023-03-27	<ol style="list-style-type: none"> <li>1. Update LCD screen TCON configuration or initialization procedure.</li> <li>2. CFG 0x70-0x71 position, backlight power-on delay</li> <li>3. CFG 0x06.0 position, whether OS core is running when the SD interface is downloaded</li> <li>4. Resistive touch screen sensitivity (.CFG file location 0x20-0x22 configuration)</li> <li>5. Variable Data Input adds support for returning floating point numbers in single precision format</li> <li>6. 0x21.11 Drawing_Ellipse arc display and 0x23 Process Bar function.</li> <li>7. 0x380 System configuration - Curve display</li> <li>8. 0x100 System configuration - FSK Bus interface</li> </ol>	Allison
2.7	2023-06-02	<ol style="list-style-type: none"> <li>1. Update QR code foreground colour and background colour change</li> <li>2. Example of icon page tran instruction</li> <li>3. Real-time curve data point refresh, displayed as a point</li> </ol>	Allison
2.8	2023-09-01	Add 0xDE Background ICL Switching	Allison



## Appendix1:FAQs of T5L\_DGUSII Screen

1. Only one picture is displayed as a black screen.

A: For the T5L1 platform, the size of a single JPG image in the ICL format file package should not exceed 256 Kbytes. On the T5L2 platform, a single JPG image cannot exceed 768 Kbytes. Due to the inconsistent display complexity of images such as image gradients, especially with higher resolutions, the final compressed .JPG size may exceed 256KB, and users need to slightly lower the JPG image quality percentage. You can use the latest PC version tool software to convert, there will be a prompt when the size exceeds .

If you have any questions during the use of this document or DWIN products, or want to know more about the latest information of DWIN products, please contact us.

Hotline: 400 018 9008

Corporate QQ and WeChat: 400 018 9008

DWIN website: <https://www.dwin-global.com/>

Thank you for your continuous support to DWIN, your support is the driving force for our progress!